



PRELIMINARY

EIM8911-5

ISSUED: 01/21/2009


8.95-10.6GHz Multi-Stage Power Amplifier

FEATURES

- 8.95– 10.60GHz Operating Frequency Range
- 37dBm Output Power at 2dB Compression
- 26.0 dB Typical Power Gain @2dB gain compression
- Non-Hermetic Metal Flange Package

APPLICATIONS

- Point-to-point and point-to-multipoint radio
- Military Radar Systems

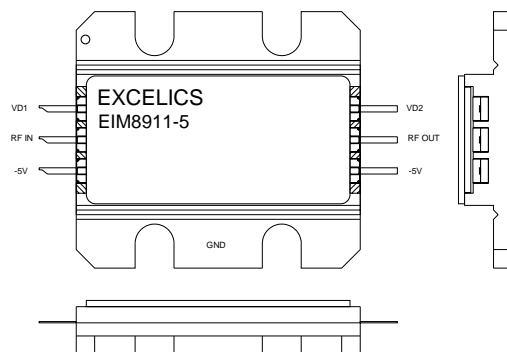

Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS (Tb = 25 °C, 50 ohm, VD1=7V, VD2=10V, Vgg=-5V)

SYMBOL	PARAMETER/TEST CONDITIONS	MIN	TYP	MAX	UNITS
F	Operating Frequency Range	8.95		10.6	GHz
P2dB	Output Power at 2dB Gain Compression	36	37		dBm
G2dB	Gain @2dB gain compression	24	26		dB
Input RL	Input Return Loss		-12	-8	dB
Output RL	Output Return Loss		-15	-10	dB
VD1	Drain Supply Voltage 1		7		V
VD2	Drain Supply Voltage 2		10		V
I _{DQ1}	Quiescent Drain Current 1		600		mA
I _{DQ2}	Quiescent Drain Current 2		1800	2000	mA
V _{gg}	Gate Supply Voltage		-5		V
R _{th}	Thermal Resistance		3.4		°C/W
ΔT _{ch}	Channel Temperature Rise			80	°C

Note: Turn on/off sequence is required:

- to turn on: apply -5V on both V_{gg} first, then +7V and +10V.
- to turn off: turn +7V and +10V off first, then turn -5V off

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com


page 1 of 3
Issued January 2009

MAXIMUM RATINGS @25°C^{1,2}

SYMBOL	CHARACTERISTIC	ABSOLUTE	CONTINUOUS ^{1,2}
V _{D1}	Drain Supply Voltage 1	12V	8V
V _{D2}	Drain Supply Voltage 2	14V	10V
V _{gg}	Gate Supply Voltage	-10V	-6 V
I _{gg}	Gate Current	150mA	50 mA
P _{IN}	Input Power	17dBm	@ 3dB compression
T _{CH}	Channel Temperature	175°C	165°C
T _{STG}	Storage Temperature	-65/175°C	-65/175°C
P _T	Total Power Dissipation	36.7W	30.9W

Notes: 1. Operating the device beyond any of the above rating may reduce MTTF and cause permanent damage.
 2. Bias conditions must also satisfy the following equation $V_{dd} \cdot I_{dd} < (T_{CH} - T_b) / R_{TH}$

Package Dimension and Pin Assignment

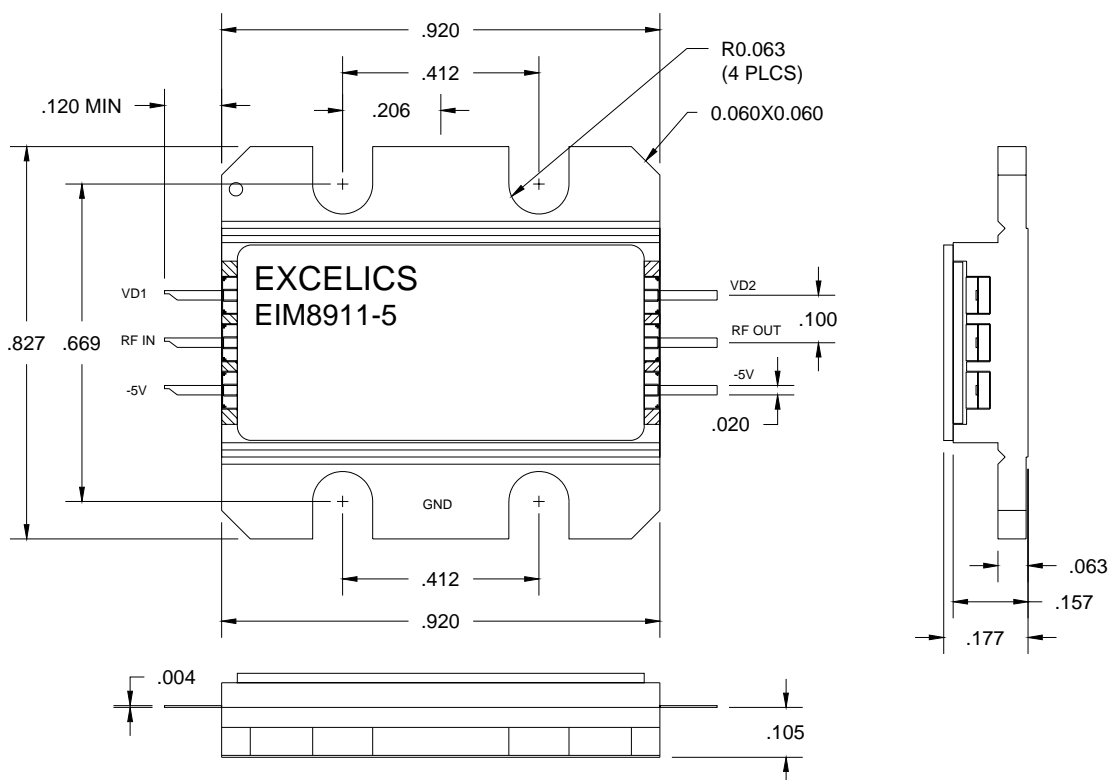

Dimensions are in inches

Specifications are subject to change without notice.



EIM8911-5

ISSUED: 01/21/2009

8.95-10.6GHz Multi-Stage Power Amplifier

DISCLAIMER

EXCELICS SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. EXCELICS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

EXCELICS SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF EXCELICS SEMICONDUCTOR, INC.

AS HERE IN:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 3 of 3
Issued January 2009