

DC/DC CONVERTERS 120 VOLT INPUT

SMHP120 SERIES 65 WATT

FEATURES

- Fully qualified to Class H
- -55° to +125°C operation
- 80 to 175 VDC input
- Fully Isolated
- Magnetic feedback
- Fixed frequency, 600 kHz typical
- Topology – Single Ended Forward
- Inhibit input and output side
- Sync in and out
- Indefinite short circuit protection
- Remote sense on single output models
- Up to 85% efficiency
- Parallelable up to 180 watts



Size (max.): 3.005 x 1.505 x 0.400 inches (76.33 x 38.23 x 10.16mm)
See Section B8, case U1, for dimensions.
Weight: 100 grams maximum
Screening: Standard or Class H (MIL-PRF-38534)
See Section C2 for screening options, see Section A5 for ordering information.

MODELS	
VDC OUTPUT	
SINGLE	DUAL
5	±12
12	±15
15	

DESCRIPTION

The SMHP120™ Series DC/DC converters provide up to 65 watts of output power over the full -55° to 125°C temperature range. SMHP120 models operate from a MIL-STD-704 nominal 120 volt DC power bus – from 80 to 175 VDC – continuous operation and provide isolated outputs at 5, 12, 15, and 28 VDC. Parallel operation for all loading conditions is supported without any requirement for external components.

SCREENING

SMHP120 converters offer three screening options – Standard, or Class H. See Section C2, Quality Assurance, pages C2-7 through C2-9, for descriptions.

CONVERTER DESIGN

SMHP120 DC/DC converters are constant frequency, pulse width modulated switching power supplies which use a quasi-square wave, two-switch single-ended forward converter design. Tight load regulation is achieved through a wide-bandwidth magnetic feedback circuit.

SMHP converters meet a wide variety of military/aerospace performance and environmental specifications. Their continuous operation input voltage (80 to 175) meets the normal operating limits of MIL-STD-704D. The units are built as fully hermetic thick film hybrids in Interpoint's MIL-STD-1772 certified facilities.

PARALLEL OPERATION

Up to five single output SMHP converters may be used in parallel to power a single load by simply connecting the share pins of all units. Units in this configuration have a 90% current sharing accuracy over all loading conditions, and provide true n+1 operation.

FEATURES

Synchronization – units may be synchronized to an external clock or to one another by using sync in and sync out pins provided on each unit. The converters have a nominal switching frequency of 600 kHz, but may be synchronized at any frequency from 525 to 675 kHz.

Low voltage lock-out – shuts down when the input line voltage falls below approximately 50 VDC to provide smooth initialization.

Continuous short circuit protection – using foldback current limit set at approximately 125%.

Soft-start – at both turn-on and recovery after load fault conditions.

Remote sense – to provide automatic compensation for voltage drops on output lines on single output models.

For more information, contact your Interpoint representative listed in Section A5.

CRANE


interpoint
A CRANE CO. COMPANY


All technical information is believed to be accurate, but no responsibility is assumed for errors or omissions. Interpoint reserves the right to make changes in products or specifications without notice. SMHP120 is a trademark of Interpoint. Copyright © 1999 Interpoint. All rights reserved.

B1-4

CASE U

CASES

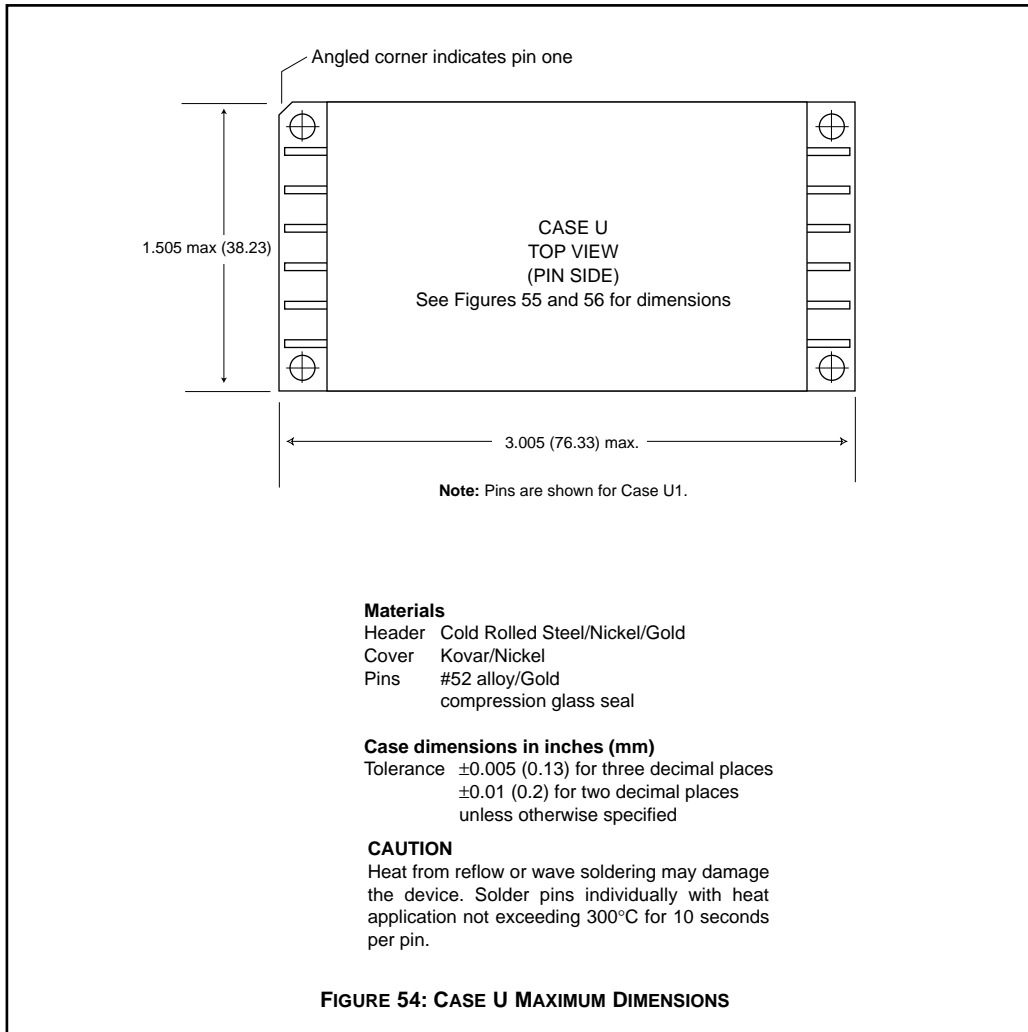

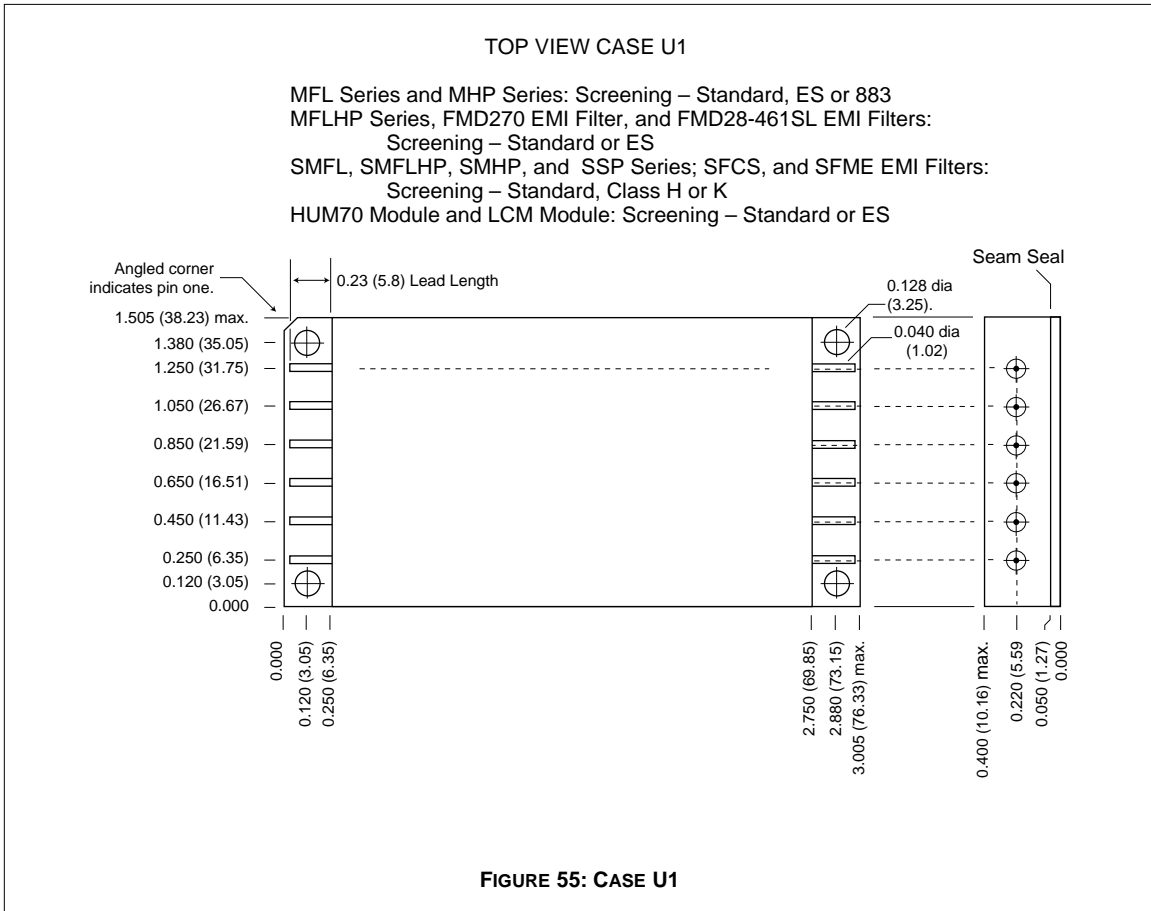

SPACE PRODUCTS

ELEMENT EVALUATION TEST PERFORMED (COMPONENT LEVEL)	STANDARD (O)		CLASS H		CLASS K	
	M/S	P	M/S	P	M/S	P
Element Electrical	yes	no	yes	yes	yes	yes
Element Visual	no	no	yes	yes	yes	yes
Internal Visual	no	no	yes	no	yes	no
Temperature Cycling	no	no	no	no	yes	yes
Constant Acceleration	no	no	no	no	yes	yes
Interim Electrical	no	no	no	no	yes	no
Burn-in	no	no	no	no	yes	no
Post Burn-in Electrical	no	no	no	no	yes	no
Steady State Life	no	no	no	no	yes	no
Voltage Conditioning /Aging	no	no	no	no	no	yes
Visual Inspection	no	no	no	no	no	yes
Final Electrical	no	no	yes	yes	yes	yes
Wire Bond Evaluation*	no	no	yes	yes	yes	yes
SEM	no	no	no	no	yes	no
SLAM™/C-SAM: Input capacitors only (Add'l test, not req. by H or K)	no	no	no	yes	no	yes

Notes

- M/S Active components (Microcircuit and Semiconductor Die)
- P Passive components
- * Not applicable to EMI filters that have no wirebonds

Definitions

Element Evaluation: Component testing/screening per MIL-STD-883 as determined by MIL-PRF-38534

SEM: Scanning Electron Microscopy

SLAM™: Scanning Laser Acoustic Microscopy

C-SAM: C - Mode Scanning Acoustic Microscopy

Applies to the following products:

SMFLHP Series

SSP Series

SLIM Module

SFMC EMI Filter

SMFL Series

SMHF Series

SFME120 EMI Filter

STF EMI Filter

SMHP Series (O&H only)

SMSA Series

SFME28 EMI Filter

SMTR Series

SLH Series

SFCS EMI Filter



QA SCREENING SPACE PRODUCTS

ENVIRONMENTAL SCREENING TEST PERFORMED (END ITEM LEVEL)	STANDARD (O)	CLASS H	CLASS K
Non-destruct bond pull* Method 2023	no	no	yes
Pre-cap inspection Method 2017, 2032	yes	yes	yes
Temperature cycle Method 1010, Cond. C	yes	yes	yes
Constant acceleration Method 2001, 3000 g	yes	yes	yes
PIND Test Method 2020, Cond. B	no	no	yes
Radiography Method 2012	no	no	yes
Pre burn-in test	yes	yes	yes
Burn-in, Method 1015, 125°C			
96 hours	yes	no	no
160 hours	no	yes	no
2 x 160 hour (includes mid BI test)	no	no	yes
Final electrical test MIL-PRF-38534, Group A	yes	yes	yes
Hermeticity test			
Fine Leak, Method 1014, Cond. A	yes	yes	yes
Gross Leak, Method 1014, Cond. C	yes	yes	yes
Final visual inspection Method 2009	yes	yes	yes

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Note

* Not applicable to EMI filters that have no wirebonds.

Applies to the following products:

SMFLHP Series	SMHF Series	SFME28 EMI Filter
SMFL Series	SMSA Series	SFCS EMI Filter
SMHP Series (O&H only)	SLH Series	SFMC EMI Filter
SMTR Series	SLIM Module	STF EMI Filter
SSP Series	SFME120 EMI Filter	

SPACE PRODUCTS

ELEMENT EVALUATION TEST PERFORMED (COMPONENT LEVEL)	STANDARD (O)		CLASS H		CLASS K	
	M/S	P	M/S	P	M/S	P
Element Electrical	yes	no	yes	yes	yes	yes
Element Visual	no	no	yes	yes	yes	yes
Internal Visual	no	no	yes	no	yes	no
Temperature Cycling	no	no	no	no	yes	yes
Constant Acceleration	no	no	no	no	yes	yes
Interim Electrical	no	no	no	no	yes	no
Burn-in	no	no	no	no	yes	no
Post Burn-in Electrical	no	no	no	no	yes	no
Steady State Life	no	no	no	no	yes	no
Voltage Conditioning /Aging	no	no	no	no	no	yes
Visual Inspection	no	no	no	no	no	yes
Final Electrical	no	no	yes	yes	yes	yes
Wire Bond Evaluation*	no	no	yes	yes	yes	yes
SEM	no	no	no	no	yes	no
SLAM™/C-SAM: Input capacitors only (Add'l test, not req. by H or K)	no	no	no	yes	no	yes

Notes

- M/S Active components (Microcircuit and Semiconductor Die)
- P Passive components
- * Not applicable to EMI filters that have no wirebonds

Definitions

Element Evaluation: Component testing/screening per MIL-STD-883 as determined by MIL-PRF-38534

SEM: Scanning Electron Microscopy

SLAM™: Scanning Laser Acoustic Microscopy

C-SAM: C - Mode Scanning Acoustic Microscopy

Applies to the following products:

SMFLHP Series

SSP Series

SLIM Module

SFMC EMI Filter

SMFL Series

SMHF Series

SFME120 EMI Filter

STF EMI Filter

SMHP Series (O&H only)

SMSA Series

SFME28 EMI Filter

SMTR Series

SLH Series

SFCS EMI Filter



QA SCREENING SPACE PRODUCTS

ENVIRONMENTAL SCREENING TEST PERFORMED (END ITEM LEVEL)	STANDARD (O)	CLASS H	CLASS K
Non-destruct bond pull* Method 2023	no	no	yes
Pre-cap inspection Method 2017, 2032	yes	yes	yes
Temperature cycle Method 1010, Cond. C	yes	yes	yes
Constant acceleration Method 2001, 3000 g	yes	yes	yes
PIND Test Method 2020, Cond. B	no	no	yes
Radiography Method 2012	no	no	yes
Pre burn-in test	yes	yes	yes
Burn-in, Method 1015, 125°C			
96 hours	yes	no	no
160 hours	no	yes	no
2 x 160 hour (includes mid BI test)	no	no	yes
Final electrical test MIL-PRF-38534, Group A	yes	yes	yes
Hermeticity test			
Fine Leak, Method 1014, Cond. A	yes	yes	yes
Gross Leak, Method 1014, Cond. C	yes	yes	yes
Final visual inspection Method 2009	yes	yes	yes

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.

Note

* Not applicable to EMI filters that have no wirebonds.

Applies to the following products:

SMFLHP Series	SMHF Series	SFME28 EMI Filter
SMFL Series	SMSA Series	SFCS EMI Filter
SMHP Series (O&H only)	SLH Series	SFMC EMI Filter
SMTR Series	SLIM Module	STF EMI Filter
SSP Series	SFME120 EMI Filter	

QA SCREENING SPACE PRODUCTS

RADIATION HARDNESS LEVELS FOR DC/DC CONVERTERS AND LINE INPUT MODULES¹

PRODUCT LEVEL AVAILABILITY RADIATION HARDNESS LEVELS	ENVIRONMENTAL SCREENING LEVELS		
	STANDARD (O)	CLASS H	CLASS K
O: Standard, no radiation guarantee For system evaluation, electrically and mechanically comparable to H and K level.	OO	HO	Not available
L: Radiation hardened – Tested lots Up to 50 k Rads (Si) total dose No SEU guarantee	Not available	HL	KL
R: Radiation hardened – Tested lots Up to 100 k Rads (Si) total dose SEU guarantee up to 40 MeV	Not available	HR	KR

L and R are referenced to MIL-PRF-38534, appendix G, Radiation Hardness Assurance (RHA) levels.

Note

1. Interpoint's **EMI filters** are designed exclusively with passive components providing maximum tolerance for space environment requirements.

Applies to the following products:

- | | |
|-------------------------------------|---------------------|
| SMFLHP Series (levels O and L only) | SMHF Series |
| SMFL Series (levels O and L only) | SMSA Series |
| SMTR Series | SLH Series |
| SSP Series | SLIM Series Modules |

REPORTS: INCLUDED WITH PURCHASE OF PRODUCT HL, KL, HR, or KR

1. Radiation Susceptibility Analysis
2. Electrical/Thermal Stress Analysis and Derating Report
3. MTBF Report
4. FMEA Report

OO option: Select reports available as separate purchases.