



SAW Components

Data Sheet B3511

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background. In the background, there is a faint, stylized globe and a wavy, ribbon-like shape that flows across the scene, adding a sense of motion and technology.



SAW Components

B3511

Low-Loss Filter for Telematics Application

1865,0 & 1895,0 MHz


Data Sheet



Ceramic package QCC8D

Features

- Low-loss 2-in-1 RF filter for mobile telephone PCS systems, transmit path
- Device with two integrated Tx-filter
- Usable passband of Tx-filter 1 30 MHz
- Usable passband of Tx-filter 2 30 MHz
- No matching network required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)
- Extended temperature range for automotive application

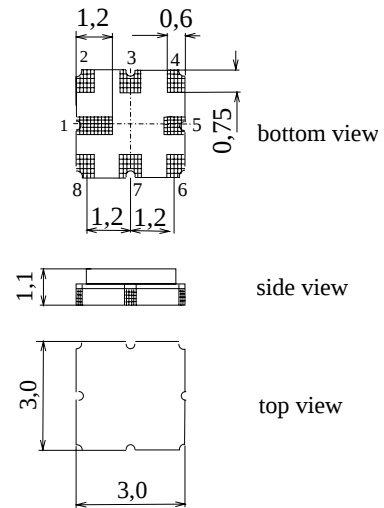


Dimensions in mm, approx. weight 0,037 g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|-----|-----------------------------|
| 1 | Input Tx-filter 1 |
| 7 | Output Tx-filter 1 |
| 2,6 | To be grounded |
| 3 | Input Tx-filter 2 |
| 5 | Output Tx-filter 2 |
| 4,8 | Case-ground, to be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B3511	B39192-B3511-U810	C61157-A7-A72	F61074-V8101-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +85	$^{\circ}\text{C}$	source and load impedance 50 Ω continuous wave
Storage temperature range	T_{stg}	-40 / +85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Input power max. 1850...1910 MHz	P_{IN}	10	dBm	



SAW Components

B3511

Low-Loss Filter for Telematics Application

1865,0 & 1895,0 MHz

Data Sheet



Characteristics of Tx-filter 1

Operating temperature range: $T = -40$ to $+85$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	1865,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$			—	1,8	3,0	dB
		1850,0 ...1880,0	MHz				
Amplitude ripple (p-p)	$\Delta\alpha$			—	0,7	1,7	dB
		1850,0 ...1880,0	MHz				
Input return loss				9,0	10,0	—	dB
		1850,0 ...1880,0	MHz				
Output return loss				9,0	10,0	—	dB
		1850,0 ...1880,0	MHz				
Attenuation	α						
		10,0 ...1770,0	MHz	24,0	26,0	—	dB
		1770,0 ...1800,0	MHz	26,0	30,0	—	dB
		1930,0 ...1960,0	MHz	36,0	41,0	—	dB
		2113,0 ...2174,0	MHz	32,0	34,0	—	dB
		2200,0 ...3000,0	MHz	20,0	26,0	—	dB



SAW Components

B3511

Low-Loss Filter for Telematics Application

1865,0 & 1895,0 MHz

Data Sheet



Characteristics of Tx-filter 2

Operating temperature range: $T = -40$ to $+85$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

				min.	typ.	max.	
Center frequency	f_c			—	1895,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$			—	1,8	3,0	dB
		1880,0 ... 1910,0	MHz				
Amplitude ripple (p-p)	$\Delta\alpha$			—	0,7	1,7	dB
		1880,0 ... 1910,0	MHz				
Input return loss				9,0	10,0	—	dB
		1880,0 ... 1910,0	MHz				
Output return loss				9,0	10,0	—	dB
		1880,0 ... 1910,0	MHz				
Attenuation	α						
		10,0 ... 1800,0	MHz	24,0	26,0	—	dB
		1800,0 ... 1830,0	MHz	26,0	29,0	—	dB
		1960,0 ... 1990,0	MHz	36,0	41,0	—	dB
		2113,0 ... 2174,0	MHz	32,0	34,0	—	dB
		2200,0 ... 3000,0	MHz	20,0	26,0	—	dB



SAW Components

B3511

Low-Loss Filter for Telematics Application

1865,0 & 1895,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW COM WT AE PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.