

Agilent E6833A cdma2000/1xEV-DO Calibration Application

For the E6601A Wireless Communications Test Set

Data Sheet



The next generation of mobile phone manufacturing test.

The **Agilent E6601A** is the new, one-box test set that expedites mobile phone calibration. Combining industry-leading measurement speed, selectable formats, flexible licensing, and an integrated open Windows® XP PC, the E6601A helps you achieve the lowest cost of test in mobile phone manufacturing.

The E6601A and its available technology-specific software applications deliver industry leading measurement speed and accuracy for your mobile phone test needs.

The **Agilent E6833A cdma2000/1xEV-DO Calibration Application** is a non-signaling application optimized for cdma2000®/1xEV-DO mobile phone calibration. The E6833A also provides a choice of perpetual, transportable, or term licenses for maximizing asset utilization and your cost per test.

The test set and its applications use emerging advancements such as fast device tune features to deliver fast, high-quality calibration. Because it's Agilent, you can be confident—it operates using trusted, proven measurement methodology that ensures measurement integrity that is never compromised.

E6601A/E6890A Features and General Specifications

- CW, AM, FM, DSB-SC-SC source modulation
- RF analyzer
- Spectrum monitor
- Transmitter power measurement
- Power versus time measurement
- Frequency error measurement
- Optional IQ capture waveform sampling
- Internal OCXO timebase
- Built-in open Windows XP PC
- Run test programs with internal or external PC
- GPIB, USB, and LAN connectivity and control

E6833A Features

Source modulation

- CW, amplitude, frequency, IS-95, cdma2000, and 1xEV-DO

Power measurements

- Mean power
- Root-raised cosine power

Power measurements

- Channel power
- Dynamic power
- Fast device tune

Spectral measurements

- Tx spurious emissions
- Occupied bandwidth
- Spectrum monitor

Modulation quality measurements

- IS-95, cdma2000 RC1 rho

www.DataSheet4U.com



Agilent Technologies

www.DataSheet4U.com

Technical Specifications

These specifications apply to an E6601A mainframe and the E6833A cdma2000/1xEVDO Calibration Application firmware revision A.03 or higher. Only feature additions beyond the E6890A General Purpose Application are included in this document. Specifications describe the test set's warranted performance and are valid for the unit's operation within ± 10 °C of the last self alignment. All specifications are valid after a 30-minute warm-up period of continuous operation with valid self alignment. If the instrument has been off for longer than 48 hours, a 48-hour warm-up period followed by a self alignment is required.

Supplemental characteristics are intended to provide typical, but non-warranted, performance parameters that may be useful in applying the instrument. These characteristics are shown in italics and labeled as "typical." All units shipped from the factory meet these typical numbers at +25 °C ambient temperature without including measurement uncertainty.

RF Generator

Frequency

W-CDMA cellular bands

US cellular band	1-799, 991-1023, 1024-1323 (860.04-893.97 MHz)
US PCS band	0-1199 (1930-1990 MHz)
Korean PCS band	0-599 (1840-1870 MHz)
Japan CDMA band	1-799, 801-1039, 1041-1199, 1201-1600 (832.0125-869.9875 MHz)
IMT-2000 band	0-1199 (2110-2169.950 MHz)
NMT-450 band	1-400, 472-871, 1039-1473, 1792-2016 (approx 420-494 MHz)
Secondary 800 band	0-719, 720-919 (851-869, 935-940 MHz)
US PCS 1900 band	0-1299 (1930-1995 MHz)
AWS band	0-899 (2110-2155 MHz)

Amplitude

Output port control	User control of RF source routing to either the RF in/out port or the RF out only port
----------------------------	--

Output level range	
RF in/out port	-115 dBm/1.23 MHz to -15 dBm/1.23 MHz
RF out only port	-115 dBm/1.23 MHz to -5 dBm/1.23 MHz

Composite absolute output level accuracy

(< ± 10 °C and < 24 hours from the last alignment, -108 to -15 dBm/1.23 MHz)

RF in/out port	< ± 1.0 dB, <i>typically ± 0.65 dB</i>
RF out only port	< ± 1.0 dB, <i>typically ± 0.65 dB</i>

Modulation

Waveforms	Spectrally correct IS-95, cdma2000 RC3, 1xEV-DO waveforms
------------------	---

Modulation quality

Residual rho	<i>Typically > 0.99</i>
Residual EVM	<i>Typically < 3%</i>

RF Analyzer

Frequency

Frequency range in channel numbers

US cellular band	1-799, 991-1023, 1024-1323 (815.04-848.97 MHz)
US PCS band	0-1199 (1850-1910 MHz)
Korean PCS band	0-599 (1750-1780 MHz)
Japan CDMA band	1-799, 801-1039, 1041-1199, 1201-1600 (887.0125-924.9875 MHz)
IMT-2000 band	0-1199 (1920-1979.950 MHz)
NMT-450 band	1-400, 472-871, 1039-1473, 1792-2016 (approx 410-484 MHz)
Secondary 800 band	0-719, 720-919 (806-824, 896-901 MHz)
US PCS 1900 band	0-1299 (1850-1915 MHz)
AWS band	0-899 (1710-1755 MHz)

Amplitude

Input level range

Channel power	-61 dBm/1.23 MHz to +28 dBm/1.23 MHz
Peak input power	-61 dBm/1.23 MHz to +37 dBm/1.23 MHz

Self alignment validity

< ±10 °C change and < 30 days
from last self alignment

Reverse Traffic Channel Suite

Triggering this measurement suite results in the capture of one block of samples from which is derived the channel power, occupied bandwidth, and Tx spurious emissions parameters.

Trigger setup

Sources	External, immediate, RF generator ARB
---------	--

Channel power measurement

Measurement method	Measures the total power in a 1.23 MHz bandwidth centered on the reverse channel center frequency
Measurement interval	1.25 ms for cdma2000 or 1.67 ms for 1xEV-DO
Measurement range	-61 dBm/1.23 MHz to +28 dBm/1.23 MHz
Measurement accuracy	-61 to +28 dBm/1.23 MHz < ±0.7 dB, typically < ±0.2 dB
Measurement repeatability	Typically < ±0.05 dB

Modulation quality measurement

Input frequency ranges	Same as RF analyzer
Measurement chip rate	1.2288 Mcps
Measurement method	IS-95 or cdma2000 RC1: single code rho
Input level range	Average power -25 to +37 dBm/ 1.23 MHz
Modulation quality measurement range (for signals with < ±1 kHz frequency error)	
IS-95, RC1	0.40 to 1.00 rho
Measurement interval	1.042 ms (5 Walsh symbols)
Modulation quality measurement accuracy	
IS-95, RC1 rho	< ±0.003 + residual error for 0.8 < rho < 1.0
Modulation quality measurement residuals	
rho	> 0.999
Frequency error	±2 Hz plus timebase error
Measurement results	rho, frequency error, phase error, magnitude error, carrier feedthrough

Occupied bandwidth


Measurement method	Measures the bandwidth that contains 99.0% of the total integrated power of the transmitted signal centered on the selected reverse channel
Input level range	+5 to +28 dBm/1.23 MHz
Measurement accuracy	±60 kHz for 99.0% total integrated power

Tx spurious emissions

Measurement method	Measures the active carrier power in a 1.23 MHz bandwidth, then measures the power in a 30 kHz bandwidth at two offsets above and below the active carrier and displays the ratio of the offset powers to the active carrier power in dBc
Input level range	+0 to +30 dBm/1.23 MHz
Measurement offsets	
Frequencies < 1000 MHz	±885 kHz, ±1.98 MHz
Frequencies > 1000 MHz	±1.25 MHz, ±1.98 MHz
Measurement bandwidth	
Carrier	1.23 MHz flat channel filter
Offsets	30 kHz synchronously tuned, five-pole filter with approximately Gaussian shape
Measurement accuracy	
±885 kHz, ±1.25 MHz	< ±0.35 dB, typically < ±0.15 dB
±1.98 MHz	< ±0.6 dB, typically < ±0.25 dB
Residual noise floor	
±885 kHz, ±1.25 MHz	< -73 dBc/30 kHz BW
±1.98 MHz offsets	< -75 dBc/30 kHz BW
Mobile pass/fail limits	
Auto mode	
Frequencies < 1000 MHz	-42 dBc/30 kHz for ±885 kHz offsets
	-54 dBc/30 kHz for ±1.98 MHz offsets
Frequencies > 1000 MHz	-42 dBc/30 kHz for ±1.25 MHz offsets
	-50 dBc/30 kHz for ±1.98 MHz offsets
Manual mode	Settable from -10 to -65 dBc with 0.01 dB resolution

Dynamic Power Measurement

Measurement method	Captures a user-defined trace consisting of 5, 10, or 20 ms duration power steps with user-defined step size produced by a test mode in the device under test. Measures the total power in each step period in a 1.23 MHz bandwidth centered on the reverse channel center frequency
Input level range	-61 to +28 dBm/1.23 MHz
Amplitude capture range	With 4 dB crest < ±2 dB of expected power
Measurement accuracy¹ (within +2 to -45 dB of expected power)	-61 to +28 dBm/1.23 MHz < ±0.7 dB, typically < ±0.2 dB
Measurement accuracy¹ (within 45 dB of expected power with < 48 hours warm-up before self alignment initiation)	-59 to +28 dBm/1.23 MHz < ±0.7 dB, typically < ±0.3 dB
	-65 to < -59 dBm/1.23 MHz < ±0.8 dB, typically < ±0.5 dB
Measurement repeatability	Typically < ±0.05 dB for returning to the same level and frequency with no temperature change and insignificant time change
Trigger setup	Sources external, fall, rise

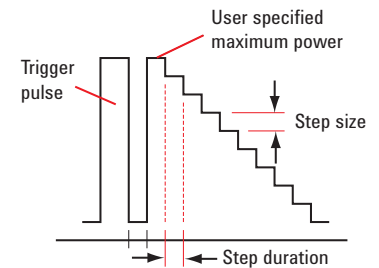

1. Additional accuracy error when using RF OUT ONLY port is < ±0.1 dB.

Fast Device Tune Measurement

Measurement method	Allows simultaneous calibration of a device's transmitter output power and receiver input level across level and frequency in a single sweep (per frequency band). The device must operate in a test mode, which forces it to transmit a predefined series of power steps at various reverse link frequencies, and simultaneously tune its receiver to perform measurements (such as RSSI) of the test set's signal at various forward link frequencies and power levels
Measurement range	-65 dBm/1.23 MHz to +28 dBm/1.23 MHz
Measurement interval	1.25 ms
Measurement filter	1.23 MHz brick wall
Step size range	5 to 20 ms
Trigger sources	Immediate and RF rise
Output level setting (to be within 0.1 dB of the final power level)	
Amplitude switch	< 1 ms, <i>typically</i> < 250 μ s
Frequency switch within band	< 1 ms, <i>typically</i> < 500 μ s
Measurement accuracy ¹ (within 45 dB of expected power with < 48 hours warm-up before self alignment initiation)	
-54 to +28 dBm/1.23 MHz	< ± 0.75 dB, <i>typically</i> < ± 0.3 dB
-61 to < -55 dBm/1.23 MHz	< ± 0.85 dB, <i>typically</i> < ± 0.3 dB
RF source output level range	
RF in/out port	-115 dBm/1.23 MHz to -15 dBm/1.23 MHz
RF out only port	-115 dBm/1.23 MHz to -5 dBm/1.23 MHz
Composite absolute output level accuracy (< ± 10 °C and < 24 hours from the last alignment, -108 to -15 dBm/1.23 MHz)	
RF in/out port	< ± 1.0 dB, <i>typically</i> ± 0.65 dB
RF out only port	< ± 1.0 dB, <i>typically</i> ± 0.65 dB
RF output level settling	< 1 ms to be within 0.1 dB of the final value

1. Additional accuracy error when using RF OUT ONLY port is < ± 0.1 dB.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	877 894 4414
Latin America	305 269 7500
United States	800 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	81 426 56 7832
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	<small>*0.125 € fixed network rates</small>
Germany	01805 24 6333*
	<small>*0.14€/minute</small>
Ireland	1890 924 204
Israel	972 3 9288 504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland (French)	41 (21) 8113811 (Opt 2)
Switzerland (German)	0800 80 53 53 (Opt 1)
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 24, 2007

cdma2000 is a registered certification mark of the Telecommunications Industry Association. Used under license.

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006, 2007
Printed in USA, December 6, 2007
5989-6426EN

