# **Crystal Oscillator**

# Model Name NH37M28LB

Oven-Controlled Crystal Oscillator (OCXO) for Fixed Communication Equipment

#### Main Application

- Mobile communications base station
- Measuring instrument
- Synthesizer

## Features

• Compact.

www

- Excellent rise characteristics.
- Excellent phase noise characteristics.
- Excellent aging characteristics.

# 80

#### **RoHS** Compliant Directive 2002/95/EC

#### Specifications


. <del>Del</del>	Item Measuremer	nt condition Model	NH37M28LB
	Standard nominal frequency (MH	z)	10
	Power supply voltage		DC +5V
	Power consumption		3 W max. at the start and 1.3 W max. when stable (+25°C)
	Output level		HCMOS ( $V_{OL}$ : 0.5V max., $V_{OH}$ : 4.5V min.)
	Load		50pF
	Duty Cycle (1/2Vcc)		40 to 60%
	Operating temperature range		-10 to +70°C
Frequency stability	Frequency warm-up characteristic	+25°C five minutes after power is on	±50×10 <sup>-9</sup> max.
	Aging	Based on frequency after 72 hours operation	±2×10 <sup>-9</sup> /day max.
		Based on frequency after 72 hours operation	±100×10 <sup>-9</sup> /year max.
	Frequency / temperature characteristic	-10 to +70°C	±10×10 <sup>-9</sup> max.
	Power supply variation characteristics	DC +5V±5%	±1×10 <sup>-9</sup> max.
	Frequency control characteristic	0 to +5 V, positive polarity	±1×10 <sup>-6</sup> min.

#### ■ Reference Value

	Offset frequency	dBc/Hz
	1 Hz	–80 max.
	10 Hz	-120 max.
Phase noise (@10MHz)	100 Hz	-140 max.
	1k Hz	–145 max.
	10k Hz	-150 max.

The value of phase noise changes when the frequency changes.

#### Dimensions

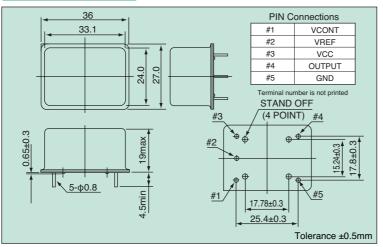

## List of Options

Operating temperature range	-40 to +70°C
Power supply voltage	DC +3.3V
Nominal frequency (MHz)	10 to 40

For details of options, please feel free to contact our sales representatives.

### List of Ordering Codes

Frequency (MHz)	Ordering Code
10	NH37M28LB-10M-NSA3423A

The above frequencies are NDK's standard frequencies. Frequencies other than the above are available. Feel free to contact our sales representatives.





Exchanger

• High-end router