

Ceramic Low Pass Filter

DC to 2850 MHz

NEW!
LFCN-2850



BLUE CELL™

CASE STYLE: FV1206

Model	Price	Qty.
LFCN-2850	\$1.99	(10-49)
LFCN-2850D	\$2.49	(10-49)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C


*Passband rating, derate linearly to 3.5W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged


Outline Drawing

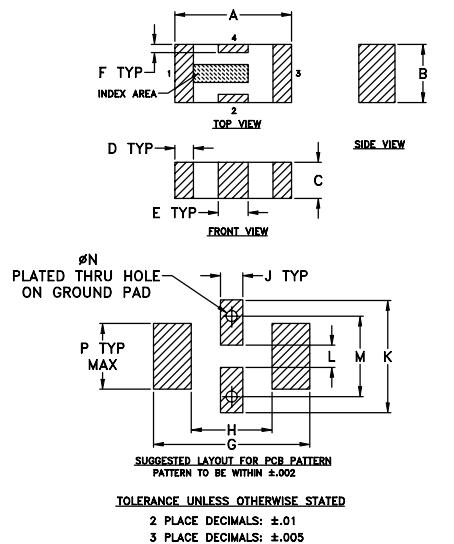

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.126	.063	.039	.020	.032	.009	.169	.087
3.20	1.60	0.99	0.51	0.81	0.23	4.29	2.21
J	K	L	M	N	P	wt.	
.024	.122	.024	.087	.012	.071	grams	
0.61	3.10	0.61	2.21	0.30	1.80	.020	

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

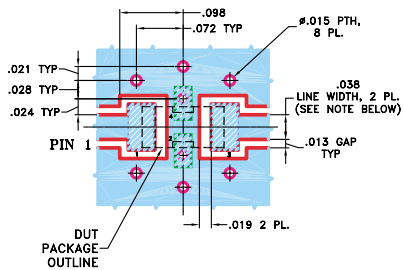

Features

- excellent power handling, 10W
- small size
- 7 sections
- temperature stable
- patent pending

Applications


- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

Low Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	f _{co} , MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			f 20 Min.	30 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-2850	DC-2850	3300	4000	4200-7400	9000	20	1.2	7

1. For Applications requiring DC voltage to be applied to the Input or output, use LFCN-2850D (DC Resistance to ground is 100 Mohms min.)

typical frequency response

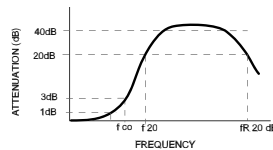

schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50.00	0.04	1.02
1000.00	0.24	1.08
1500.00	0.36	1.20
2740.00	0.80	1.32
3320.00	3.00	2.86
3760.00	15.16	15.53
4080.00	31.03	27.16
4500.00	44.67	25.94
5000.00	39.17	26.74
7000.00	29.02	24.83
10000.00	20.75	20.45
12000.00	15.45	13.29
15000.00	11.89	8.77
18000.00	14.80	5.00
20000.00	20.40	8.51

