

MICROWAVE LOW NOISE AMPLIFIER  
NPN SILICON EPITAXIAL TRANSISTOR  
4 PINS MINI MOLD

DESCRIPTION


The 2SC4094 is an NPN epitaxial silicon transistor designed for use in low-noise and small signal amplifiers from VHF band to UHF band. Low-noise figure, high gain, and high current capability achieve a very wide dynamic range and excellent linearity. This achieved by direct nitride passivated base surface process (DNP process) which is an NEC proprietary new fabrication technique.

FEATURES

- NF = 1.2 dB TYP. @f = 1.0 GHz, V<sub>CE</sub> = 8 V, I<sub>c</sub> = 7 mA
- |S<sub>21e</sub>|<sup>2</sup> = 15 dB TYP. @f = 1.0 GHz, V<sub>CE</sub> = 8 V, I<sub>c</sub> = 20 mA

ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25 °C)

Collector to Base Voltage	V <sub>CB0</sub>	20	V
Collector to Emitter Voltage	V <sub>CEO</sub>	10	V
Emitter to Base Voltage	V <sub>EBO</sub>	1.5	V
Collector Current	I <sub>c</sub>	65	mA
Total Power Dissipation	P <sub>T</sub>	200	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-65 to +150	°C

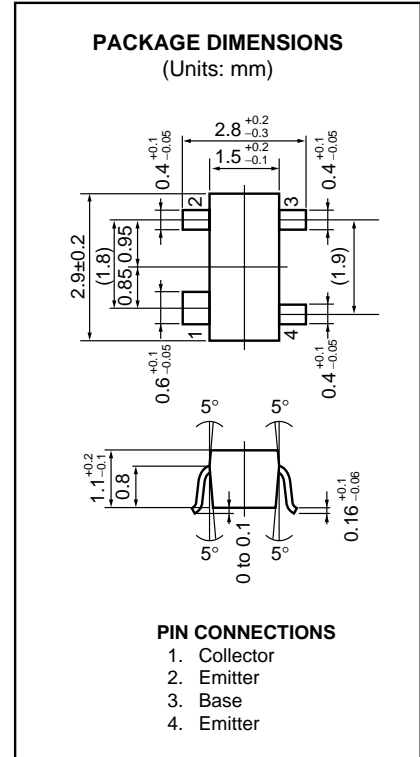

ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I <sub>CB0</sub>			1.0	μA	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0
Emitter Cutoff Current	I <sub>EBO</sub>			1.0	μA	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0
DC Current Gain	h <sub>FE</sub>	50		250		V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA
Gain Bandwidth Product	f <sub>T</sub>		9		GHz	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Feed-Back Capacitance	C <sub>re</sub>		0.25	0.8	pF	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0, f = 1.0 MHz
Insertion Power Gain	S <sub>21e</sub>   <sup>2</sup>	13	15		dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Maximum Available Gain	MAG		17		dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA, f = 1.0 GHz
Noise Figure	NF		1.2	2.0	dB	V <sub>CE</sub> = 8 V, I <sub>C</sub> = 7 mA, f = 1.0 GHz


h<sub>FE</sub> Classification

Class	R36/RCF *	R37/RCG *	R38/RCH *
Marking	R36	R37	R38
h <sub>FE</sub>	50 to 100	80 to 160	125 to 250

\* Old Specification / New Specification

TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

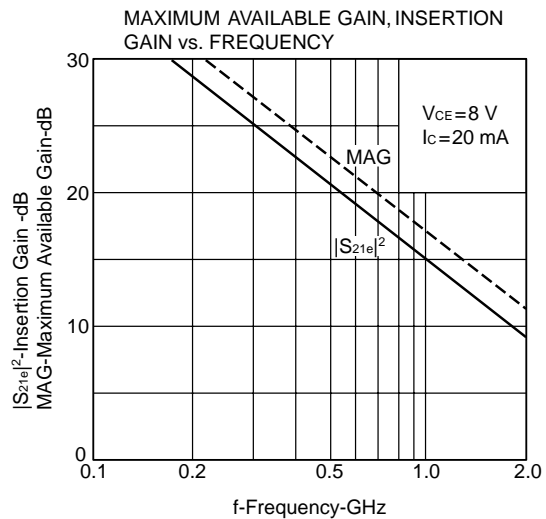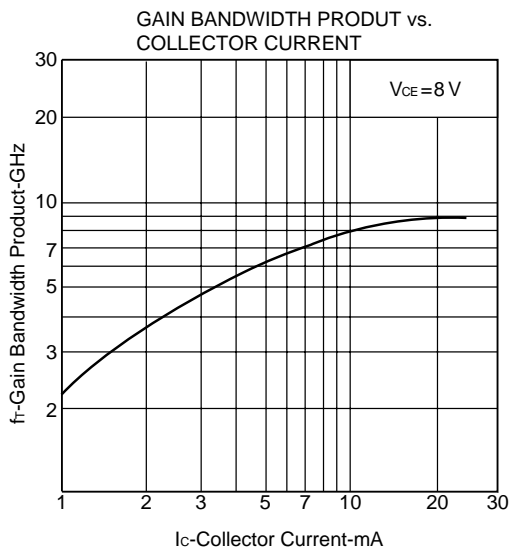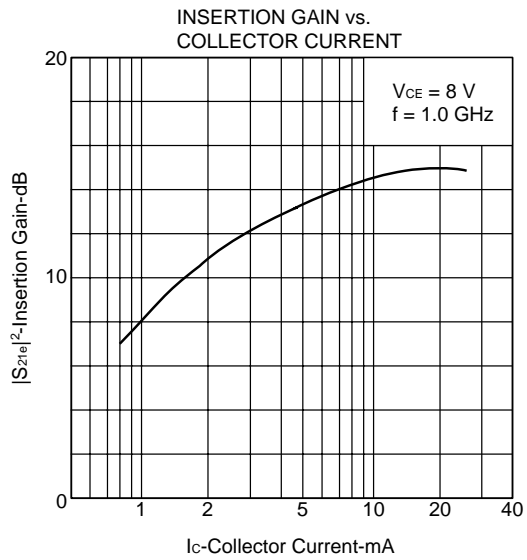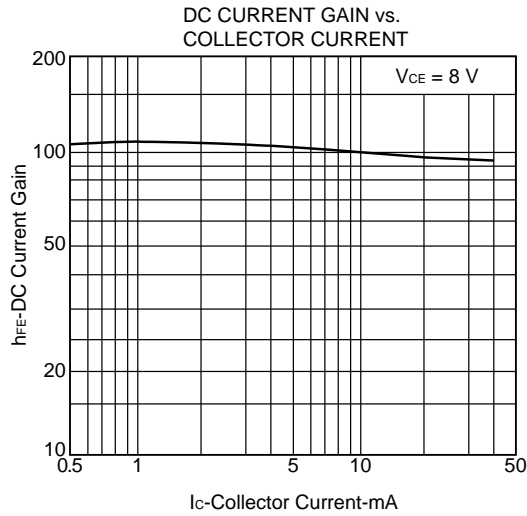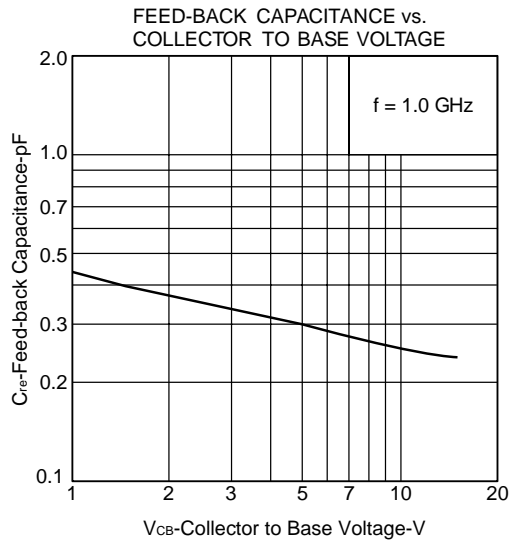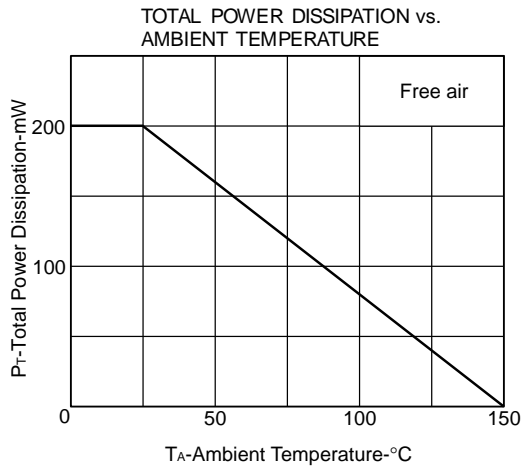

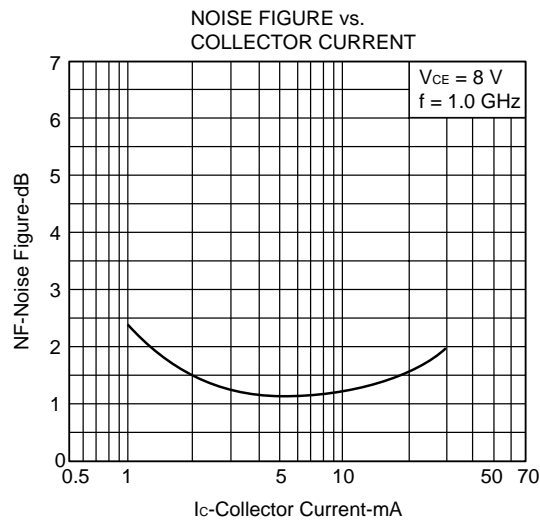

**S-PARAMETER**

V<sub>CE</sub> = 8.0 V, I<sub>c</sub> = 5.0 mA, Z<sub>0</sub> = 50 Ω


f (MHz)	S <sub>11</sub>	∠ S <sub>11</sub>	S <sub>21</sub>	∠ S <sub>21</sub>	S <sub>12</sub>	∠ S <sub>12</sub>	S <sub>22</sub>	∠ S <sub>22</sub>
200	0.774	-47.8	12.689	146.5	0.031	65.4	0.882	-19.1
400	0.631	-88.8	9.952	119.4	0.048	53.4	0.723	-29.5
600	0.523	-120.9	7.813	100.9	0.058	46.2	0.611	-33.4
800	0.460	-145.1	5.966	87.6	0.067	43.9	0.564	-34.5
1000	0.426	-166.6	4.841	76.7	0.074	43.8	0.515	-37.6
1200	0.416	178.2	4.065	68.8	0.083	43.5	0.488	-39.6
1400	0.417	163.0	3.413	60.7	0.087	41.2	0.459	-44.1
1600	0.430	152.1	3.035	54.1	0.098	42.8	0.443	-45.9
1800	0.443	142.1	2.659	48.0	0.105	40.1	0.428	-51.1
2000	0.458	136.5	2.482	44.3	0.114	43.0	0.414	-53.5

V<sub>CE</sub> = 8.0 V, I<sub>c</sub> = 20.0 mA, Z<sub>0</sub> = 50 Ω

f (MHz)	S <sub>11</sub>	∠ S <sub>11</sub>	S <sub>21</sub>	∠ S <sub>21</sub>	S <sub>12</sub>	∠ S <sub>12</sub>	S <sub>22</sub>	∠ S <sub>22</sub>
200	0.461	-89.8	23.331	121.6	0.021	60.7	0.665	-27.7
400	0.364	-135.8	13.501	99.2	0.033	61.2	0.511	-30.5
600	0.338	-163.4	9.535	86.4	0.046	61.5	0.448	-29.5
800	0.330	177.9	7.083	77.5	0.056	62.1	0.430	-29.5
1000	0.334	163.2	5.604	69.3	0.070	60.0	0.402	-32.5
1200	0.344	153.9	4.722	63.5	0.084	60.4	0.385	-34.8
1400	0.359	143.1	3.982	56.8	0.091	54.9	0.362	-39.5
1600	0.383	136.1	3.517	51.1	0.104	54.5	0.350	-42.1
1800	0.401	128.3	3.094	45.6	0.116	49.9	0.337	-47.4
2000	0.419	124.7	2.882	42.7	0.127	50.8	0.323	-50.5


S-PARAMETER

S<sub>11e</sub>, S<sub>22e</sub>-FREQUENCY CONDITION V<sub>CE</sub> = 8 V, I<sub>c</sub> = 20/5 mA, freq. = 0.2 to 2 GHz (Step 200 MHz)

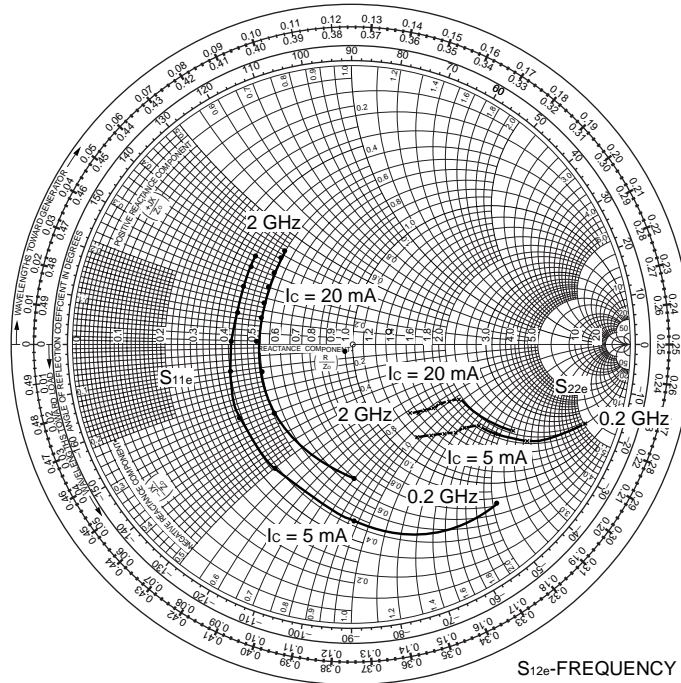


S<sub>21e</sub>-FREQUENCY

CONDITION V<sub>CE</sub> = 8 V  
I<sub>c</sub> = 20/5 mA  
freq. = 0.2 to 2 GHz (Step 200 MHz)

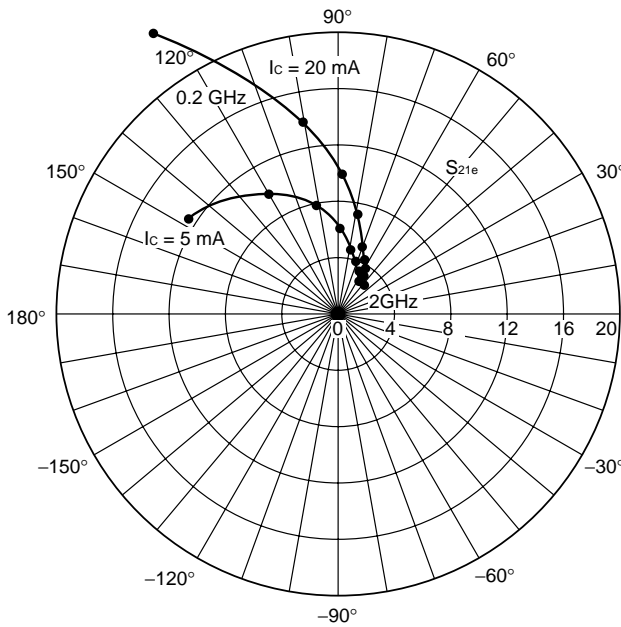

S<sub>12e</sub>-FREQUENCY

CONDITION V<sub>CE</sub> = 8 V  
I<sub>c</sub> = 20/5 mA  
freq. = 0.2 to 2 GHz (Step 200 MHz)

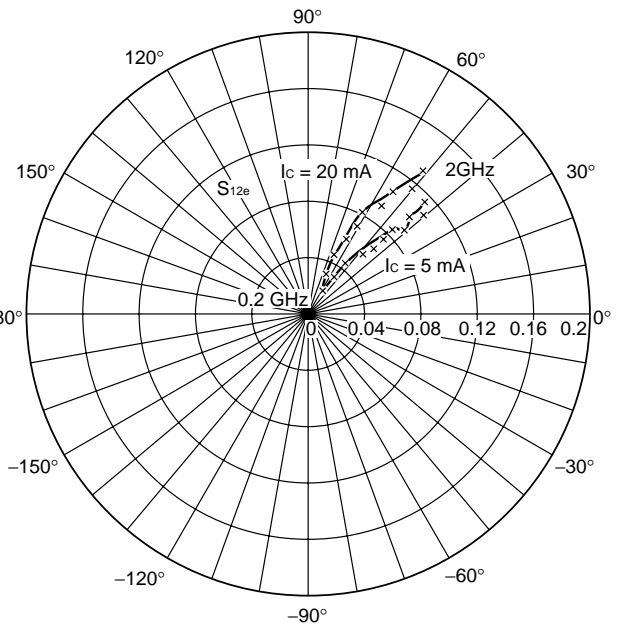

[MEMO]

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.