

CS2841B

Automotive Current Mode PWM Control Circuit

The CS2841B provides all the necessary features to implement off-line fixed frequency current-mode control with a minimum number of external components.

The CS2841B (a variation of the CS2843A) is designed specifically for use in automotive operation. The low start threshold voltage of 8.0 V (typ), and the ability to survive 40 V automotive load dump transients are important for automotive subsystem designs. The CS2841 series has a history of quality and reliability in automotive applications.

The CS2841B incorporates a precision temperature-controlled oscillator with an internally trimmed discharge current to minimize variations in frequency. Duty-cycles greater than 50% are also possible. On board logic ensures that V_{REF} is stabilized before the output stage is enabled. Ion implant resistors provide tighter control of undervoltage lockout.


Features

- Optimized for Off-Line Control
- Internally Trimmed Temperature Compensated Oscillator
- Maximum Duty-Cycle Clamp
- V_{REF} Stabilized Before Output Stage Enabled
- Low Start-Up Current
- Pulse-By-Pulse Current Limiting
- Improved Undervoltage Lockout
- Double Pulse Suppression
- 1.0 % Trimmed Bandgap Reference
- High Current Totem Pole Output




ON Semiconductor™

<http://onsemi.com>





DIP-8
N SUFFIX
CASE 626



SO-14
D SUFFIX
CASE 751A

PIN CONNECTIONS AND MARKING DIAGRAM



A = Assembly Location
WL, L = Wafer Lot
YY, Y = Year
WW, W = Work Week

ORDERING INFORMATION

| Device | Package | Shipping |
|--------------|---------|------------------|
| CS2841BEN8 | DIP-8 | 50 Units/Rail |
| CS2841BED14 | SO-14 | 55 Units/Rail |
| CS2841BEDR14 | SO-14 | 2500 Tape & Reel |

CS2841B

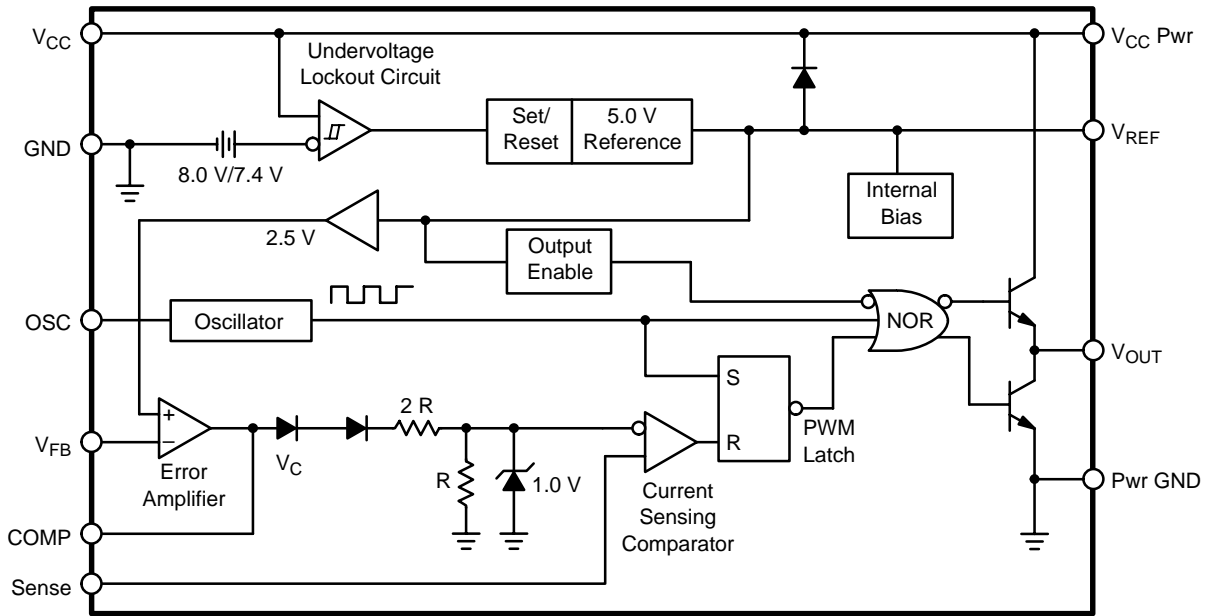


Figure 1. Block Diagram

MAXIMUM RATINGS*

| Rating | Value | Unit | |
|---|--|----------------------|----------|
| Supply Voltage (Low Impedance Source) | 40 | V | |
| Output Current | ±1.0 | A | |
| Output Energy (Capacitive Load) | 5.0 | μJ | |
| Analog Inputs (V _{FB} , Sense) | -0.3 to 5.5 | V | |
| Error Amp Output Sink Current | 10 | mA | |
| Lead Temperature Soldering | Wave Solder (through hole styles only) Note 1. Reflow (SMD styles only) Note 2. | 260 peak 230 peak | °C °C |

1. 10 seconds max.

2. 60 seconds max above 183°C

*The maximum package power dissipation must be observed.

CS2841B

ELECTRICAL CHARACTERISTICS ($-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$, $R_T = 680\text{ k}\Omega$, $C_T = 0.022\text{ }\mu\text{F}$ for Triangular Mode, $V_{CC} = 15\text{ V}$ (Note 3.), $R_T = 10\text{ k}\Omega$, $C_T = 3.3\text{ nF}$ for Sawtooth Mode (see Figure 7); unless otherwise specified.)

| Characteristic | Test Conditions | Min | Typ | Max | Unit |
|----------------|-----------------|-----|-----|-----|------|
|----------------|-----------------|-----|-----|-----|------|

Reference Section

| | | | | | |
|------------------------|---|------|------|------|------------------------|
| Output Voltage | $T_J = 25^{\circ}\text{C}$, $I_{OUT} = 1.0\text{ mA}$ | 4.9 | 5.0 | 5.1 | V |
| Line Regulation | $8.4 \leq V_{CC} \leq 16\text{ V}$ | – | 6.0 | 20 | mV |
| Load Regulation | $1.0 \leq I_{OUT} \leq 20\text{ mA}$ | – | 6.0 | 25 | mV |
| Temperature Stability | Note 4. | – | 0.2 | 0.4 | mV/ $^{\circ}\text{C}$ |
| Total Output Variation | Line, Load, Temp. Note 4. | 4.82 | – | 5.18 | V |
| Output Noise Voltage | $10\text{ Hz} \leq f \leq 10\text{ kHz}$, $T_J = 25^{\circ}\text{C}$. Note 4. | – | 50 | – | μV |
| Long Term Stability | $T_A = 125^{\circ}\text{C}$, 1000 Hrs. Note 4. | – | 5.0 | 25 | mV |
| Output Short Circuit | $T_A = 25^{\circ}\text{C}$ | –30 | –100 | –180 | mA |

Oscillator Section

| | | | | | |
|-----------------------|--|-----|-----|-----|-----|
| Initial Accuracy | Sawtooth Mode: $T_J = 25^{\circ}\text{C}$. See Figure 7. | 47 | 52 | 57 | kHz |
| | Sawtooth Mode: $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ | 44 | 52 | 60 | kHz |
| | Triangular Mode: $T_J = 25^{\circ}\text{C}$. See Figure 7. | 44 | 52 | 60 | kHz |
| Voltage Stability | $8.4 \leq V_{CC} \leq 16\text{ V}$ | – | 0.2 | 1.0 | % |
| Temperature Stability | Sawtooth Mode: $T_{MIN} \leq T_A \leq T_{MAX}$. Note 4. | – | 5.0 | – | % |
| | Triangular Mode: $T_{MIN} \leq T_A \leq T_{MAX}$. Note 4. | – | 8.0 | – | % |
| Amplitude | V_{OSC} (Peak to Peak) | – | 1.7 | – | V |
| Discharge Current | $T_J = 25^{\circ}\text{C}$ | 7.4 | 8.3 | 9.2 | mA |
| | $T_{MIN} \leq T_A \leq T_{MAX}$ | 7.2 | – | 9.4 | mA |

Error Amp Section

| | | | | | |
|-----------------------|--|------|------|------|---------------|
| Input Voltage | $V_{COMP} = 2.5\text{ V}$ | 2.42 | 2.5 | 2.58 | V |
| Input Bias Current | $V_{FB} = 0\text{ V}$ | – | –0.3 | –2.0 | μA |
| A_{VOL} | $2.0 \leq V_{OUT} \leq 4.0\text{ V}$ | 65 | 90 | – | dB |
| Unity Gain Bandwidth | Note 4. | 0.7 | 1.0 | – | MHz |
| PSRR | $8.4\text{ V} \leq V_{CC} \leq 16\text{ V}$ | 60 | 70 | – | dB |
| Output Sink Current | $V_{FB} = 2.7\text{ V}$, $V_{COMP} = 1.1\text{ V}$ | 2.0 | 6.0 | – | mA |
| Output Source Current | $V_{FB} = 2.3\text{ V}$, $V_{COMP} = 5.0\text{ V}$ | –0.5 | –0.8 | – | mA |
| V_{OUT} High | $V_{FB} = 2.3\text{ V}$, $R_L = 15\text{ k}\Omega$ to Ground | 5.0 | 6.0 | – | V |
| V_{OUT} Low | $V_{FB} = 2.7\text{ V}$, $R_L = 15\text{ k}\Omega$ to V_{REF} | – | 0.7 | 1.1 | V |

Current Sense Section

| | | | | | |
|----------------------|--|------|------|------|---------------|
| Gain | Notes 5 and 6. | 2.85 | 3.0 | 3.15 | V/V |
| Maximum Input Signal | $V_{COMP} = 5.0\text{ V}$. Note 5. | 0.9 | 1.0 | 1.1 | V |
| PSRR | $12\text{ V} \leq V_{CC} \leq 25\text{ V}$. Note 5. | – | 70 | – | dB |
| Input Bias Current | $V_{Sense} = 0\text{ V}$ | – | –2.0 | –10 | μA |
| Delay to Output | $T_J = 25^{\circ}\text{C}$. Note 4. | – | 150 | 300 | ns |

- Adjust V_{CC} above the start threshold before setting at 15 V.
- These parameters, although guaranteed, are not 100% tested in production.
- Parameter measured at trip point of latch with $V_{FB} = 0$.
- Gain defined as:

$$A = \frac{\Delta V_{COMP}}{\Delta V_{Sense}}; 0 \leq V_{Sense} \leq 0.8\text{ V}.$$

CS2841B

ELECTRICAL CHARACTERISTICS (continued) ($-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$, $R_T = 680\text{ k}\Omega$, $C_T = 0.022\text{ }\mu\text{F}$ for Triangular Mode, $V_{CC} = 15\text{ V}$ (Note 3.), $R_T = 10\text{ k}\Omega$, $C_T = 3.3\text{ nF}$ for Sawtooth Mode (see Figure 7); unless otherwise specified.)

| Characteristic | Test Conditions | Min | Typ | Max | Unit |
|----------------|-----------------|-----|-----|-----|------|
|----------------|-----------------|-----|-----|-----|------|

Output Section

| | | | | | |
|-------------------|--|----|-------|-----|---------------|
| Output Low Level | $I_{\text{SINK}} = 20\text{ mA}$ | – | 0.1 | 0.4 | V |
| | $I_{\text{SINK}} = 200\text{ mA}$ | – | 1.5 | 2.2 | V |
| Output High Level | $I_{\text{SOURCE}} = 20\text{ mA}$ | 13 | 13.5 | – | V |
| | $I_{\text{SOURCE}} = 200\text{ mA}$ | 12 | 13.5 | – | V |
| Rise Time | $T_J = 25^{\circ}\text{C}$, $C_L = 1.0\text{ nF}$. Note 7. | – | 50 | 150 | ns |
| Fall Time | $T_J = 25^{\circ}\text{C}$, $C_L = 1.0\text{ nF}$. Note 7. | – | 50 | 150 | ns |
| Output Leakage | Undervoltage Active, $V_{\text{OUT}} = 0$ | – | –0.01 | –10 | μA |

Total Standby Current

| | | | | | |
|--|---|---|-----|-----|----|
| Start-Up Current | – | – | 0.5 | 1.0 | mA |
| Operating Supply Current I_{CC} | $V_{\text{FB}} = V_{\text{Sense}} = 0\text{ V}$, $R_T = 10\text{ k}\Omega$, $C_T = 3.3\text{ nF}$ | – | 11 | 17 | mA |

Undervoltage Lockout Section

| | | | | | |
|------------------------|---------------|-----|-----|-----|---|
| Start Threshold | – | 7.6 | 8.0 | 8.4 | V |
| Min. Operating Voltage | After Turn On | 7.0 | 7.4 | 7.8 | V |

7. These parameters, although guaranteed, are not 100% tested in production.

PACKAGE PIN DESCRIPTION

| PACKAGE PIN # | | PIN SYMBOL | FUNCTION |
|---------------|-------------|---------------------|--|
| DIP-8 | SO-14 | | |
| 1 | 1 | COMP | Error amp output, used to compensate error amplifier. |
| 2 | 3 | V_{FB} | Error amp inverting input. |
| 3 | 5 | Sense | Noninverting input to Current Sense Comparator. |
| 4 | 7 | OSC | Oscillator timing network with Capacitor to Ground, resistor to V_{REF} . |
| 5 | 8 | GND | Ground. |
| | 9 | Pwr GND | Output driver Ground. |
| 6 | 10 | V_{OUT} | Output drive pin. |
| | 11 | $V_{\text{CC Pwr}}$ | Output driver positive supply. |
| 7 | 12 | V_{CC} | Positive power supply. |
| 8 | 14 | V_{REF} | Output of 5.0 V internal reference. |
| | 2, 4, 6, 13 | NC | No connection. |

CS2841B

TYPICAL PERFORMANCE CHARACTERISTICS

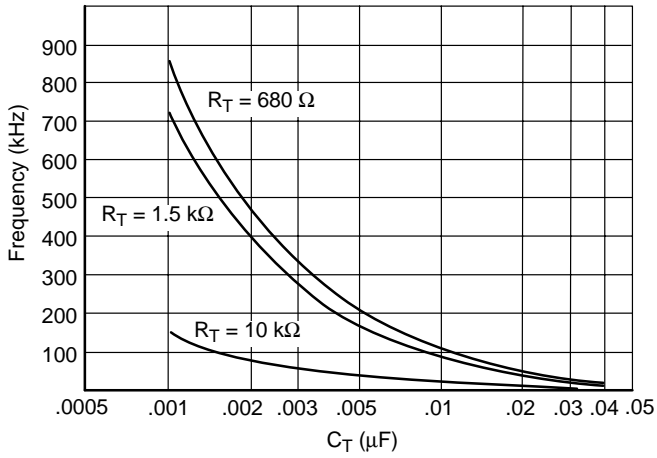


Figure 2. Oscillator Frequency vs. C_T

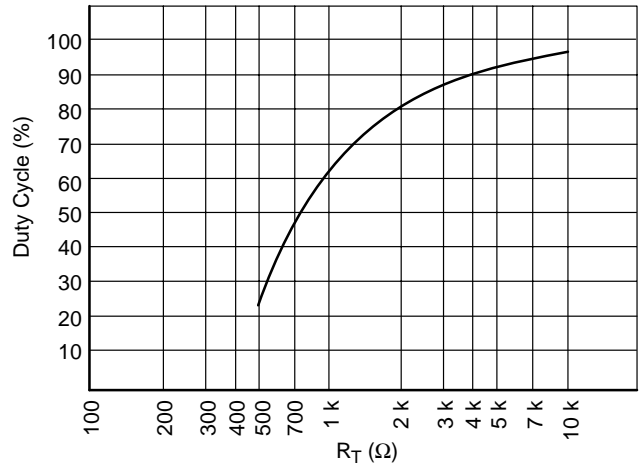


Figure 3. Oscillator Duty Cycle vs. R_T

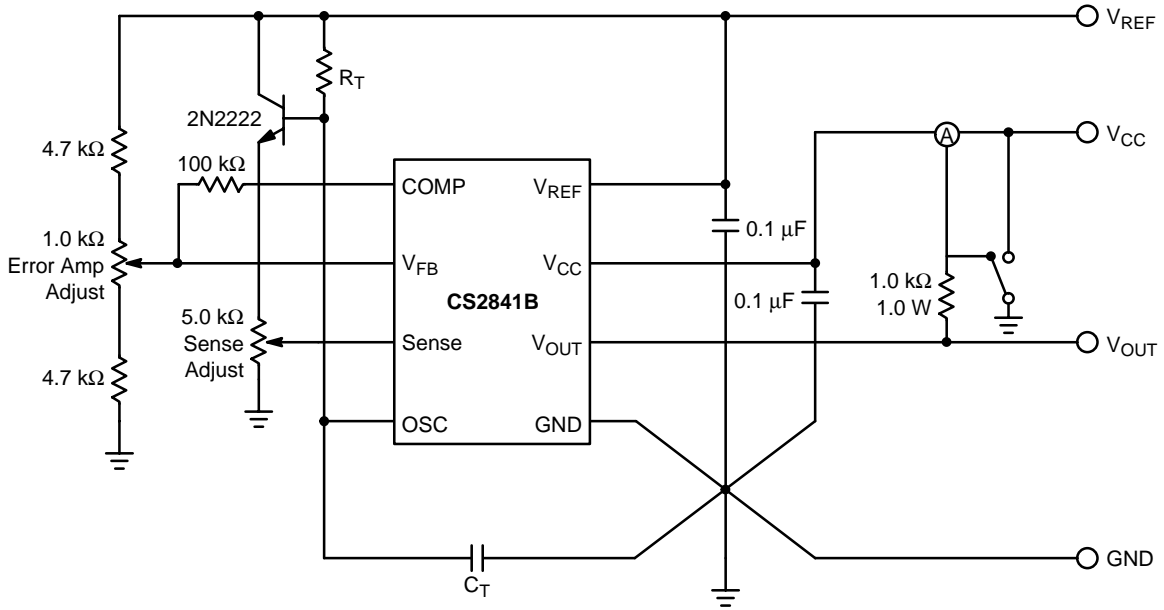


Figure 4. Test Circuit

CIRCUIT DESCRIPTION

Undervoltage Lockout

During Undervoltage Lockout (Figure 5), the output driver is biased to a high impedance state. The output should be shunted to ground with a resistor to prevent output leakage current from activating the power switch.

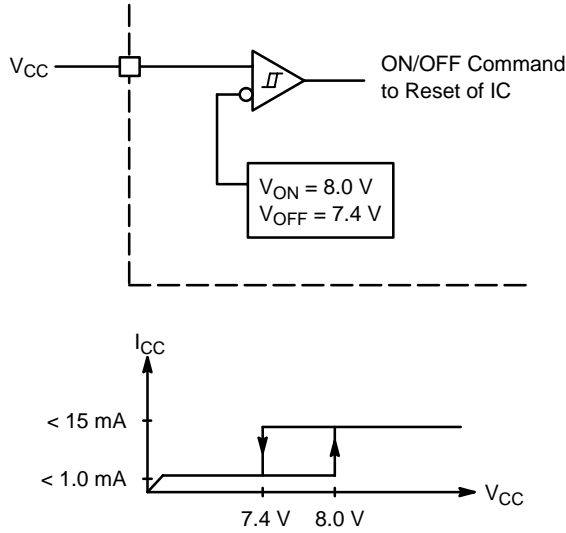


Figure 5. Typical Undervoltage Characteristics

PWM Waveform

To generate the PWM waveform, the control voltage from the error amplifier is compared to a current sense signal which represents the peak output inductor current (Figure 6). An increase in V_{CC} causes the inductor current slope to increase, thus reducing the duty cycle. This is an inherent feed-forward characteristic of current mode control, since the control voltage does not have to change during changes of input supply voltage.



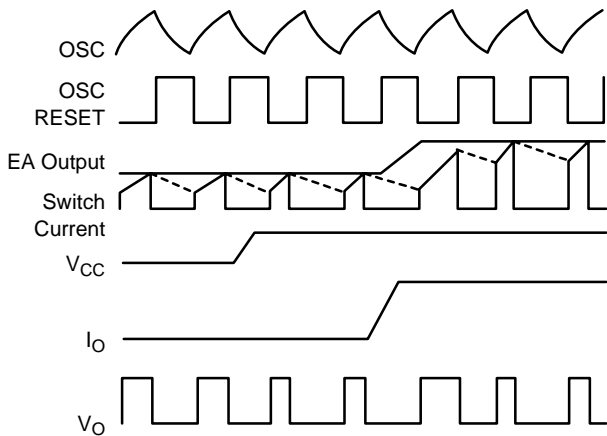


Figure 6. Timing Diagram for Key CS2841B Parameters


When the power supply sees a sudden large output current increase, the control voltage will increase allowing the duty cycle to momentarily increase. Since the duty cycle tends to exceed the maximum allowed to prevent transformer saturation in some power supplies, the internal oscillator waveform provides the maximum duty cycle clamp as programmed by the selection of OSC components.



Timing Parameters



Sawtooth Mode

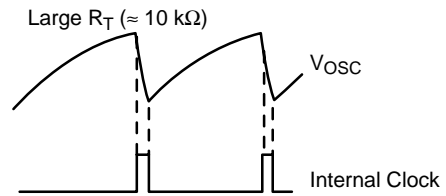

Triangular Mode

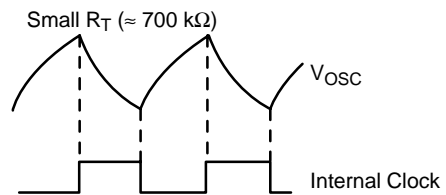


Figure 7. Oscillator Timing Network and Parameters

Setting the Oscillator

Oscillator timing capacitor, C_T , is charged by V_{REF} through R_T and discharged by an internal current source. During the discharge time, the internal clock signal blanks out the output to the Low state, thus providing a user selected maximum duty cycle clamp. Charge and discharge times are determined by the general formulas:

CS2841B


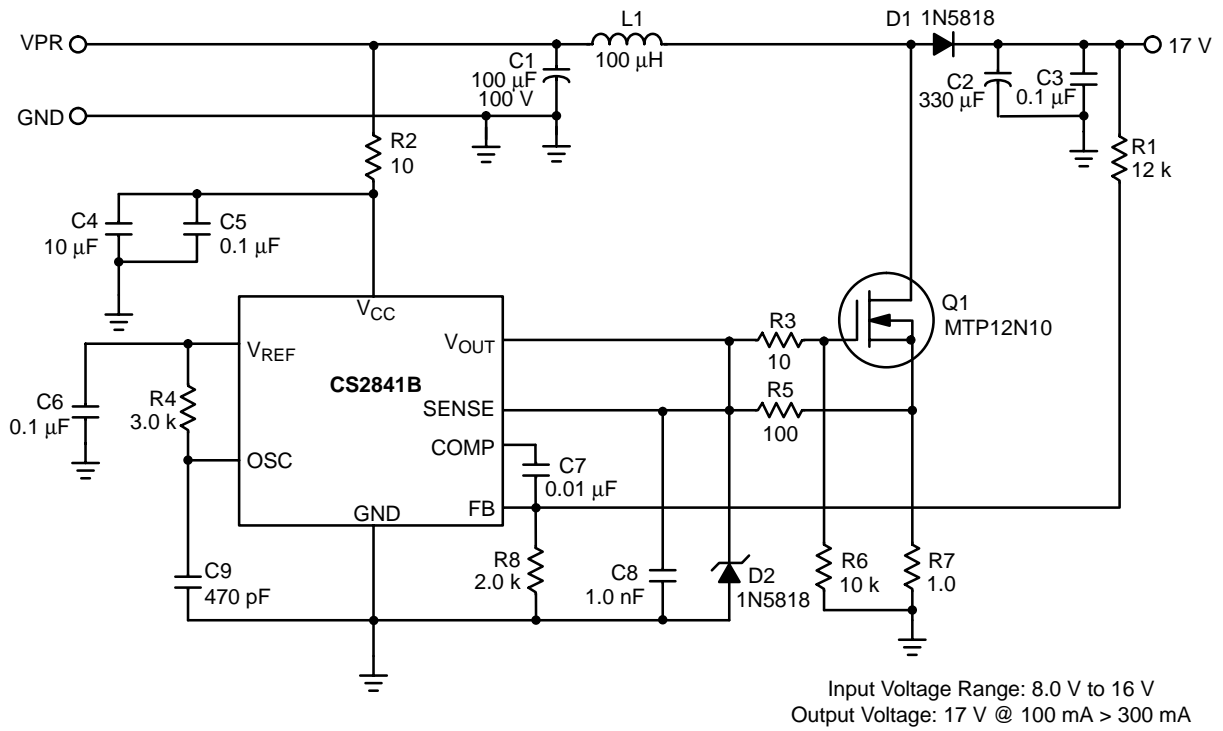


Figure 9. Boost Application

CS2841B

PACKAGE DIMENSIONS

DIP-8
N SUFFIX
CASE 626-05
ISSUE L

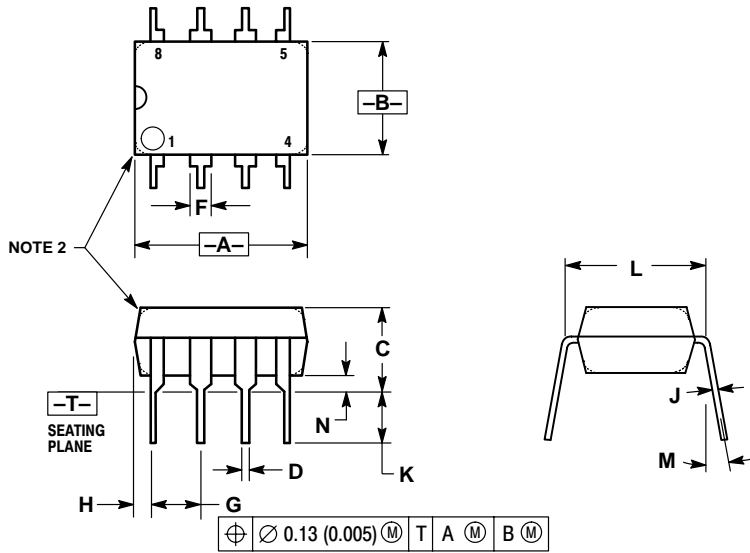


NOTES:

1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 9.40 | 10.16 | 0.370 | 0.400 |
| B | 6.10 | 6.60 | 0.240 | 0.260 |
| C | 3.94 | 4.45 | 0.155 | 0.175 |
| D | 0.38 | 0.51 | 0.015 | 0.020 |
| F | 1.02 | 1.78 | 0.040 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 0.76 | 1.27 | 0.030 | 0.050 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 2.92 | 3.43 | 0.115 | 0.135 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | --- | | 10° | |
| N | 0.76 | 1.01 | 0.030 | 0.040 |

SO-14
D SUFFIX
CASE 751A-03
ISSUE F

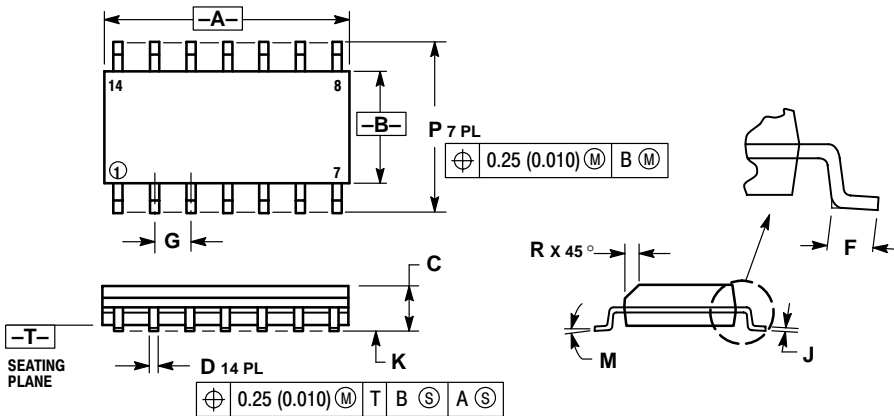

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 8.55 | 8.75 | 0.337 | 0.344 |
| B | 3.80 | 4.00 | 0.150 | 0.157 |
| C | 1.35 | 1.75 | 0.054 | 0.068 |
| D | 0.35 | 0.49 | 0.014 | 0.019 |
| F | 0.40 | 1.25 | 0.016 | 0.049 |
| G | 1.27 BSC | | 0.050 BSC | |
| J | 0.19 | 0.25 | 0.008 | 0.009 |
| K | 0.10 | 0.25 | 0.004 | 0.009 |
| M | 0° | | 7° | |
| P | 5.80 | 6.20 | 0.228 | 0.244 |
| R | 0.25 | 0.50 | 0.010 | 0.019 |

PACKAGE THERMAL DATA

| Parameter | | DIP-8 | SO-14 | Unit |
|------------------|---------|-------|-------|------|
| R _{θJC} | Typical | 52 | 30 | °C/W |
| R _{θJA} | Typical | 100 | 125 | °C/W |

Notes

Notes

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support

German Phone: (+1) 303-308-7140 (Mon-Fri 2:30pm to 7:00pm CET)
Email: ONlit-german@hibbertco.com
French Phone: (+1) 303-308-7141 (Mon-Fri 2:00pm to 7:00pm CET)
Email: ONlit-french@hibbertco.com
English Phone: (+1) 303-308-7142 (Mon-Fri 12:00pm to 5:00pm GMT)
Email: ONlit@hibbertco.com

EUROPEAN TOLL-FREE ACCESS*: 00-800-4422-3781

*Available from Germany, France, Italy, UK, Ireland

CENTRAL/SOUTH AMERICA:

Spanish Phone: 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)
Email: ONlit-spanish@hibbertco.com
Toll-Free from Mexico: Dial 01-800-288-2872 for Access –
then Dial 866-297-9322

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 1-303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)
Toll Free from Hong Kong & Singapore:
001-800-4422-3781

Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031
Phone: 81-3-5740-2700
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.