

U 427 B · U 428 B-FP

1 TELEFUNKEN ELECTRONIC

DRIVER FOR IR TRANSMITTER DIODES (CURRENT SINK)

T-52-13-07

Technology: Bipolar

Features:

- **Constant current**
 U 427 B $i_o \geq 1.3 \text{ A}$
 U 428 B-FP $i_o \geq 0.75 \text{ A}$
- **Saturation voltage**
 U 427 B $V_{CEsat} = 1.2 \text{ V}$
 U 428 B-FP $V_{CEsat} = 1.0 \text{ V}$
- **Current stabilisation starts at**
 $V_T = 1.2 \text{ V}$
- **Control voltage** $V_I = 3 \dots 10 \text{ V}$
- **Control current** $I_I \leq 0.1 \text{ mA}$
- **Additional switching transistor**
 $I_C = 20 \text{ mA}$

Case: DIP 8, SO 8

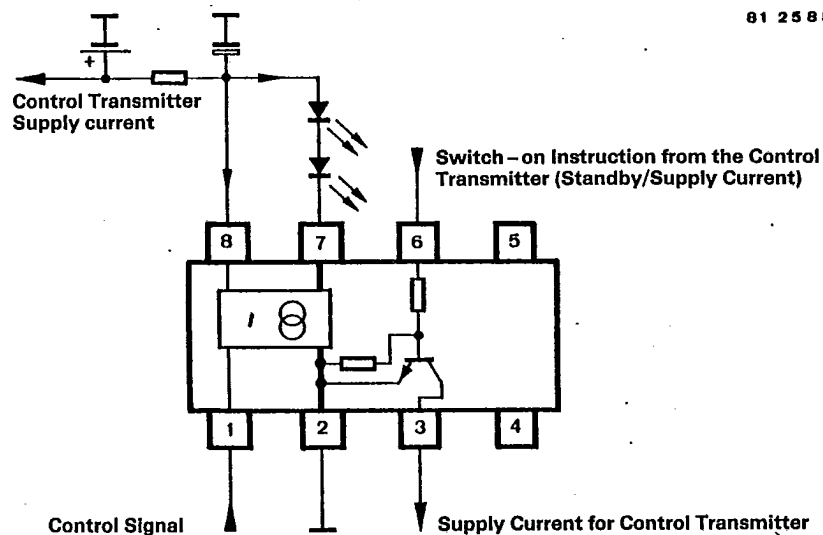


Fig. 1 Block diagram

**U 427B · U 428B-FP**

TELEFUNKEN ELECTRONIC

T-52-13-07

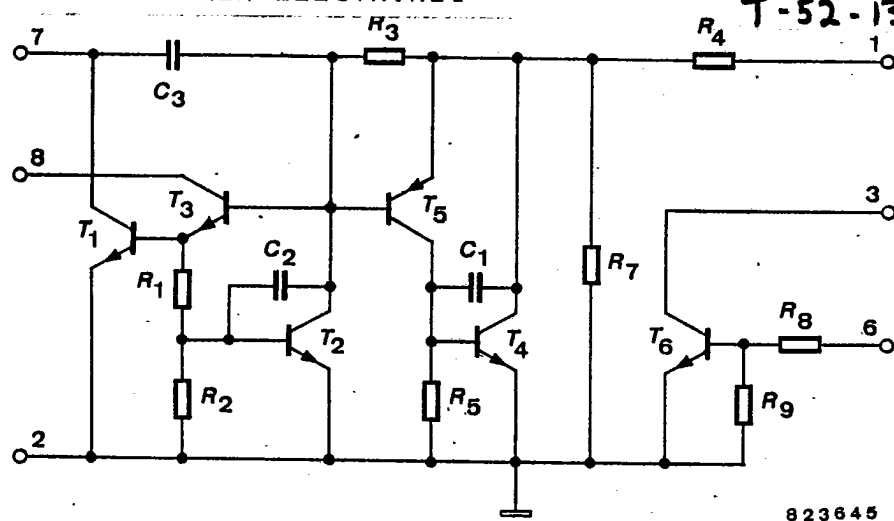


Fig. 2 Circuit diagram

Absolute maximum ratings

Reference point Pin 2

Supply voltage Pin 7, 8 $V_{7,8}$ 10 VInput voltages Pin 1, 3, 6 V_i ≤ 10 V

Controlled output current

1 T				
— $\Sigma t_p \leq 0.013$, $t_p \leq 10 \mu s$	U 427B	Pin 7	I_c	2.2 A
T 0	U 428B-FP	Pin 7	I_c	1.0 A

Collector current Pin 3 I_c 25 mA

Power dissipation				
$T_{amb} = 85^\circ C$	DIP 8	P_{tot}	250	mW
	SO 8	P_{tot}	150	mW

Junction temperature T_j 125 $^\circ C$ Ambient temperature range $T_{amb.}$ 0...+85 $^\circ C$ Storage temperature range T_{stg} -25...+125 $^\circ C$



U 427B · U 428B-FP

TELEFUNKEN ELECTRONIC

T-52-13-07

Electrical characteristics

$V_B = 9\text{ V}$, $T_{\text{amb}} = 25\text{ °C}$, reference point Pin 2,
unless otherwise specified

Min. Typ. Max.

Supply voltage range

Fig. 2		Pin 8	V_B	5		10	V
$I_C = 1.3\text{ A}$	U 427B	Pin 7	V_7	1.2		10	V
$I_C = 0.5\text{ A}$	U 428B-FP	Pin 7	V_7	1.2		10	V

Controlled output current pulse

$V_7 = 4$, $t_p = 10\text{ }\mu\text{s}$, $t_m = 5\text{ }\mu\text{s}$

$V_1 = 5\text{ V}$, Fig. 4	U 427B	Pin 7	I_C	1300	1550	1800	mA
	U 428B-FP	Pin 7	I_C	610	725	845	mA
$V_1 = 8\text{ V}$, Fig. 5	U 427B	Pin 7	I_C	1350	1600	1900	mA
	U 428B-FP	Pin 7	I_C	630	750	870	mA

Temperature coefficient

$T_{\text{amb}} = 0 \dots 85\text{ °C}$	U 427B	Pin 7	TC	6.5	8		mA/K
	U 428B-FP	Pin 7	TC	3.5	4		mA/K

Collector saturation voltage

$I_C = 1.3\text{ A}$	U 427B	Pin 7	V_{CEsat}			1.2	V
$I_C = 1\text{ A}$	U 427B	Pin 7	V_{CEsat}			1.0	V
$I_C = 0.5\text{ A}$	U 428B-FP	Pin 7	V_{CEsat}			1.0	V
$I_C = 10\text{ mA}$		Pin 3	V_{CEsat}			0.3	V

Temperature coefficient

$T_{\text{amb}} = 0 \dots 85\text{ °C}$							
$I_C = 820\text{ mA}$	U 427B	Pin 7	TC	0.5	1		mV/K
$I_C = 350\text{ mA}$	U 428B-FP	Pin 7	TC	0.5	1		mV/K

Collector cut-off current

$T_{\text{amb}} = 0 \dots 85\text{ °C}$, $V_{I1} = 0\text{ V}$		Pin 7	I_{CES}			1	μA
$V_{I8} = 10\text{ V}$		Pin 8	I_{CES}			1	μA
		Pin 3	I_{CES}			1	μA

Control voltage range

		Pin 1	V_1	3		10	V
--	--	-------	-------	---	--	----	---

Control current

$T_{\text{amb}} = 0 \dots 85\text{ °C}$, $V_1 = 5\text{ V}$		Pin 1	I_1	1.4	1.9		mA
$V_1 = 8\text{ V}$		Pin 1	I_1	2.9	3.9		mA

Current inflow

		Pin 1	I_1		0.1		mA
--	--	-------	-------	--	-----	--	----

Switching transistor

Input current

$V_1 = 3\text{ V}$		Pin 6	I_1	0.3	0.5		mA
$V_1 = 9\text{ V}$		Pin 6	I_1	1	1.6		mA
$I_C = 10\text{ mA}$		Pin 6	I_1		0.15		mA



U 427B · 428B-FP

TELEFUNKEN ELECTRONIC

Explanations

- $t_m = 0.5 t_p$ Measuring time
 t_p Duration of a single pulse
 T Period of one word
 $\sum_0^T t_p$ Summarized duration of all single pulses within the period of one word

T-52-13-07


Example for a rc transmitter built up with U 327 MD,
transmitting the 13-bit-data word 1100101000110 (ΔPCM):

$t_p = 4 \mu s$
 Number of single pulses = 85

$\sum_0^T t_p = 4 \mu s \cdot 85 = 340 \mu s$

Duty cycle:

$$\frac{1}{T} \sum_0^T t_p = \frac{340 \mu s}{120 ms} = 0.0028$$

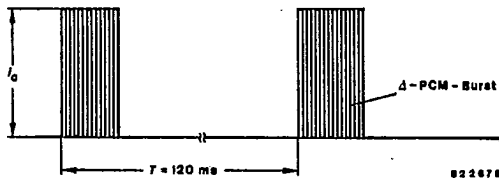



U 427B · U 428B-FP

TELEFUNKEN ELECTRONIC

T-52-13-07

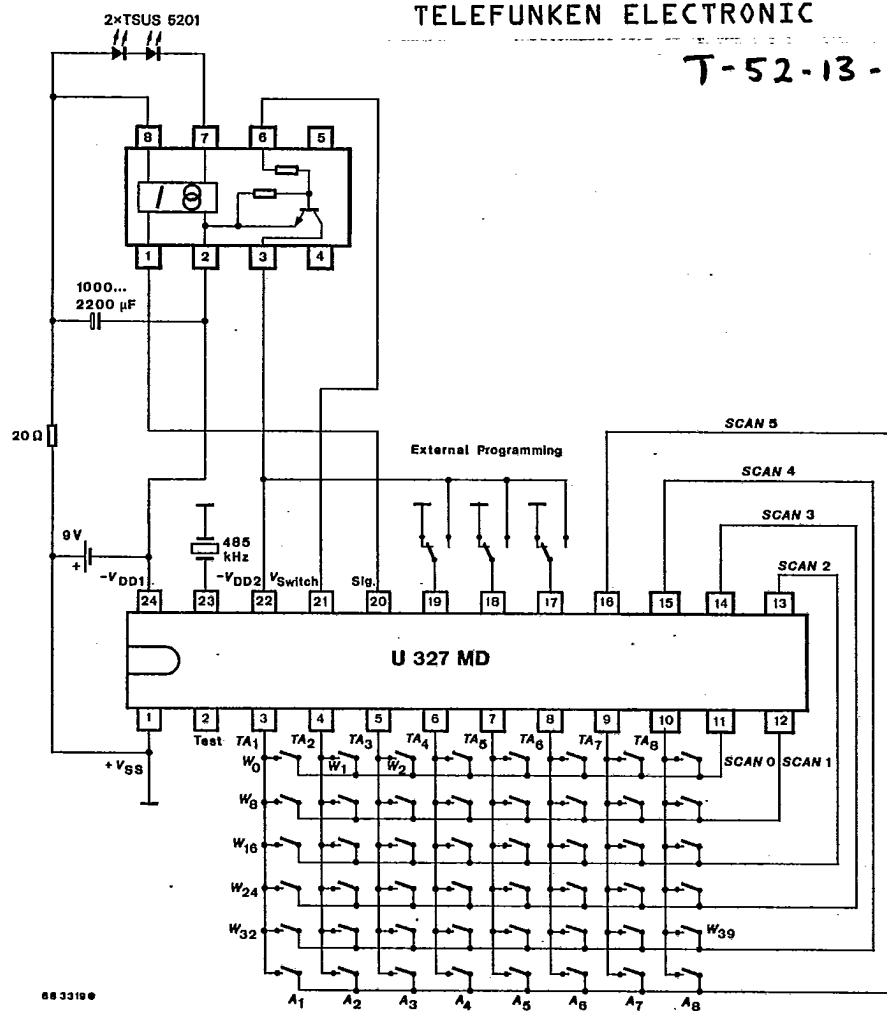





Fig. 3 Application circuit: IR remote control with U 327 MD



U 427B · U 428B-FP

T-52-13-07

TELEFUNKEN ELECTRONIC

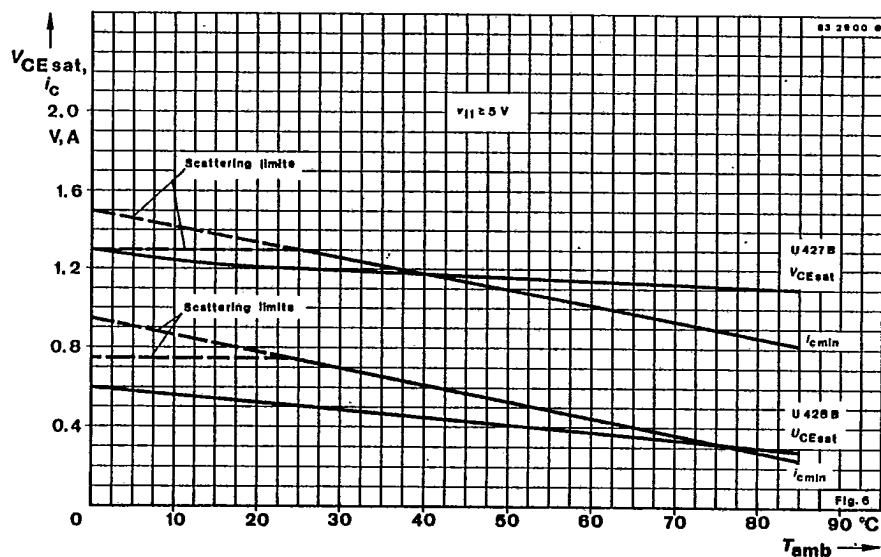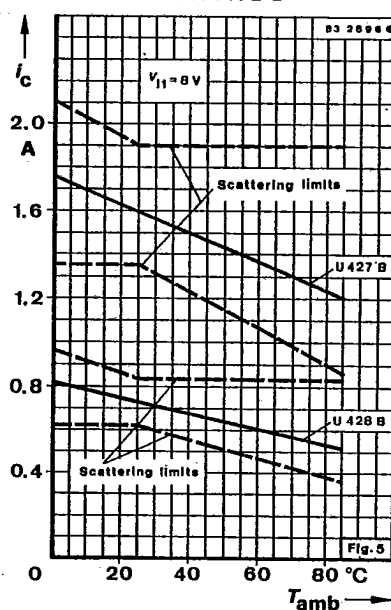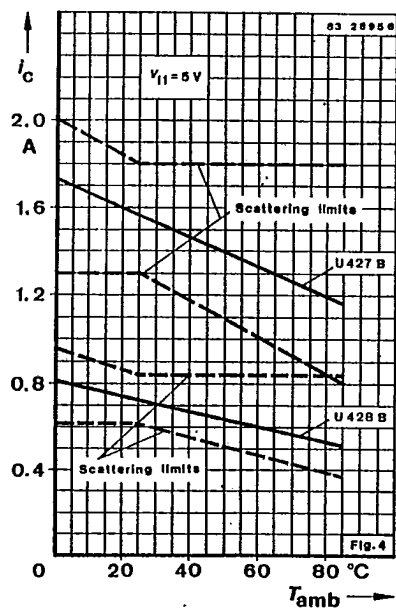


U 427 B · U 428 B-FP


TELEFUNKEN ELECTRONIC

Dimensions in mm

T-52-13-07

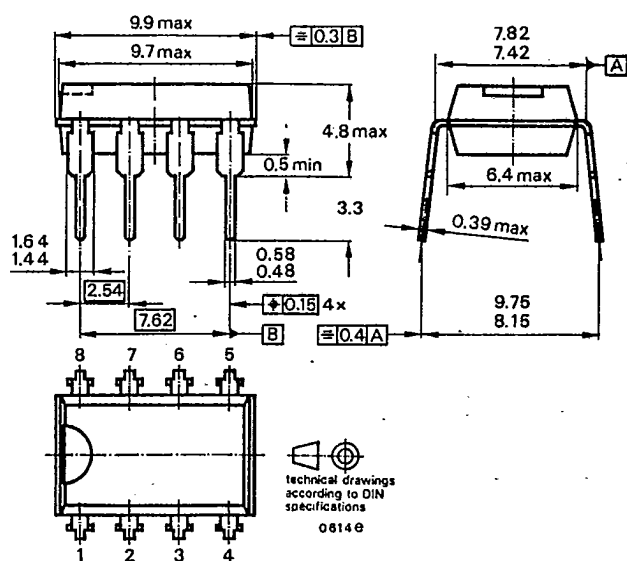

Case:
DIP 8 – U 427 B

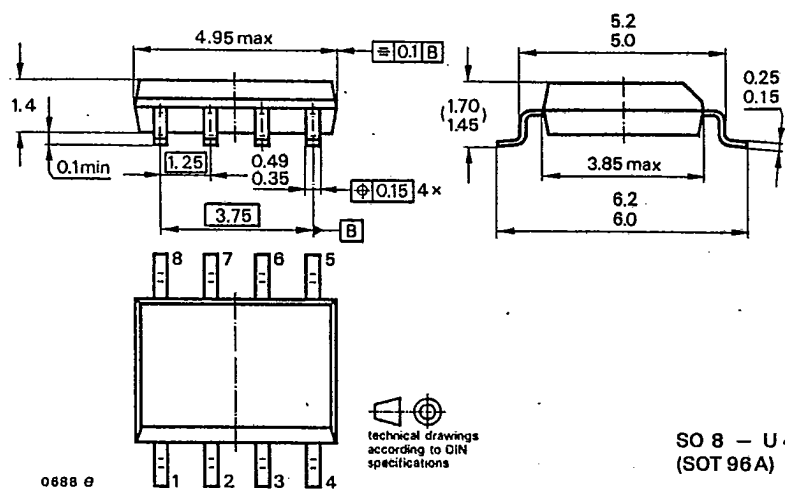

SO 8 - U 428B-FP
(SOT 96A)