



BGA771N16

High Linearity Dual-Band UMTS LNA
(1900/1800/2100, 800/900MHz)

Data Sheet

Revision 3.1, 2010-03-16
Final

RF & Protection Devices

Edition 2010-03-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2010 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BGA771N16**Revision History: 2010-03-16, V3.1****Previous Version: 2008-08-26, V3.0**

Page	Subjects (major changes since last revision)
all	Updated package

Table of Contents

Table of Contents	4
1 Description	5
2 Electrical Characteristics	6
2.1 Absolute Maximum Ratings	6
2.2 Thermal Resistance	6
2.3 ESD Integrity	6
2.4 DC Characteristics	7
2.5 Band Select / Gain Control Truth Table	7
2.6 Supply current characteristics; $T_A = 25^\circ\text{C}$	8
2.7 Logic Signal Characteristics; $T_A = 25^\circ\text{C}$	9
2.8 Switching Times	9
2.9 Measured RF Characteristics Low Band	10
2.9.1 Measured RF Characteristics UMTS Bands V / VI	10
2.9.2 Measured RF Characteristics UMTS Band VIII	11
2.10 Measured RF Characteristics Mid Band	12
2.10.1 Measured RF Characteristics UMTS Band II	12
2.10.2 Measured RF Characteristics UMTS Bands III / IX	13
2.10.3 Measured RF Characteristics UMTS Band IV	14
2.11 Measured Performance Low Band (Band V) High Gain Mode vs. Frequency	15
2.12 Measured Performance Low Band (Band V) High Gain Mode vs. Temperature	16
2.13 Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency	17
2.14 Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature	19
2.15 Measured Performance Mid Band (Band II) High Gain Mode vs. Frequency	20
2.16 Measured Performance Mid Band (Band II) High Gain Mode vs. Temperature	21
2.17 Measured Performance Mid Band (Band II) Low Gain Mode vs. Frequency	22
2.18 Measured Performance Mid Band (Band II) Low Gain Mode vs. Temperature	24
3 Application Circuit and Block Diagram	25
3.1 UMTS bands II and V Application Circuit Schematic	25
3.2 UMTS bands III and VIII Application Circuit Schematic	26
3.3 UMTS bands IV and VIII Application Circuit Schematic	27
3.4 Pin Definition	28
3.5 Application Board	29
4 Physical Characteristics	31
4.1 Package Footprint	31
4.2 Package Dimensions	32

1 Description

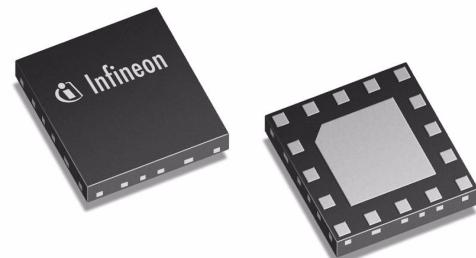
The BGA771N16 is a highly flexible, high linearity dual-band (1900/1800/2100, 800/900 MHz) low noise amplifier MMIC for worldwide use. Based on Infineon's proprietary and cost-effective SiGe:C technology, the BGA771N16 uses an advanced biasing concept in order to achieve high linearity.

The device features dynamic gain control, temperature stabilization, standby mode, and 2 kV ESD protection on-chip as well as matching off chip. Because the matching is off chip, different UMTS bands can be easily applied. For example, the 1900 MHz path can be converted into a 1800 MHz or a 2100 MHz path by optimizing the input and output matching network.

Note: UMTS bands II / V is the standard band combination for this product requiring no external output matching network.

Features

- Gain: 16 / -7.5 dB in high / low gain mode (all bands)
- Noise figure: 1.1 / 1.1 dB in high gain mode (800 MHz / 1900 MHz)
- Supply current: 3.4 / 0.65 mA in high / low gain mode (all bands)
- Standby mode (< 2 μ A typ.)
- Output internally matched to 50 Ω
- Inputs pre-matched to 50 Ω
- 2kV HBM ESD protection
- Low external component count
- Small leadless PG-TSNP-16-1 package (2.3 x 2.3 x 0.39 mm)
- Pb-free (RoHS compliant) package



PG-TSNP-16-1 package

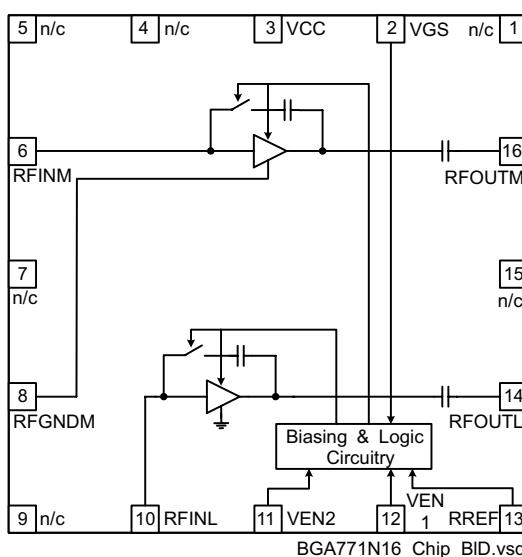


Figure 1 Block diagram of dual-band LNA

Type	Package	Marking	Chip
BGA771N16	PG-TSNP-16-1	BGA771	T1530

Absolute Maximum Ratings

2 Electrical Characteristics

2.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Supply voltage	V_{CC}	-0.3	3.6	V	
Supply current	I_{CC}		10	mA	
Pin voltage	V_{PIN}	-0.3	$V_{CC}+0.3$	V	All pins except RF input pins
Pin voltage RF Input Pins	V_{RFIN}	-0.3	0.9	V	
RF input power	P_{RFIN}		4	dBm	
Junction temperature	T_j		150	°C	
Ambient temperature range	T_A	-30	85	°C	
Storage temperature range	T_{stg}	-65	150	°C	

2.2 Thermal Resistance

Table 2 Thermal Resistance

Parameter	Symbol	Value	Unit	Note / Test Conditions
Thermal resistance junction to soldering point	R_{thJS}	≤ 37	K/W	

2.3 ESD Integrity

Table 3 ESD Integrity

Parameter	Symbol	Value (typ.)	Unit	Note / Test Conditions
ESD hardness HBM ¹⁾	$V_{ESD-HBM}$	2000	V	All pins

1) According to JESD22-A114

DC Characteristics

2.4 DC Characteristics

Table 4 DC Characteristics, $T_A = 25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply voltage	V_{CC}	2.7	2.8	3.0	V	
Supply current high gain mode	I_{CCHG}		3.4		mA	All bands
Supply current low gain mode	I_{CCLG}		650		μA	All bands
Supply current standby mode	I_{CCOFF}		0.1	2	μA	
Logic level high	V_{HI}	1.5	2.8		V	VEN1, VEN2 and VGS
Logic level low	V_{LO}		0.0	0.5	V	
Logic currents VEN	I_{ENL}		0.2		μA	VEN1 and VEN2
	I_{ENH}		10.0		μA	
Logic currents VGS	I_{GSL}		0.1		μA	VGS
	I_{GSH}		5.0		μA	

2.5 Band Select / Gain Control Truth Table

Table 5 Band Select Truth Table, $V_{CC} = 2.8 \text{ V}$

	Mid band	Low band	Power Down
VEN1	H	L	L
VEN2	L	H	L

Table 6 Gain Control Truth Table, $V_{CC} = 2.8 \text{ V}$

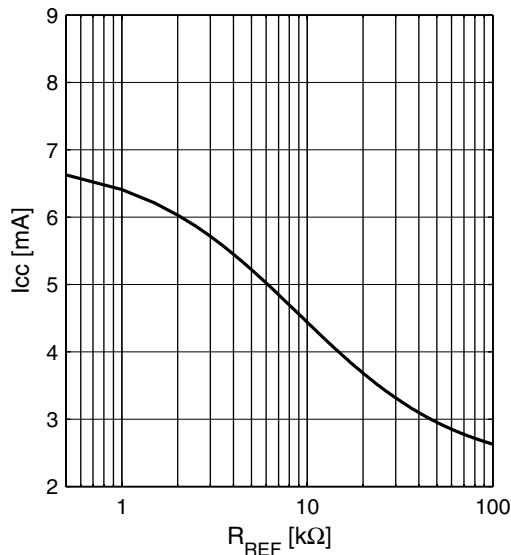
	High Gain	Low Gain
VGS	H	L

Supply current characteristics; $T_A = 25^\circ\text{C}$

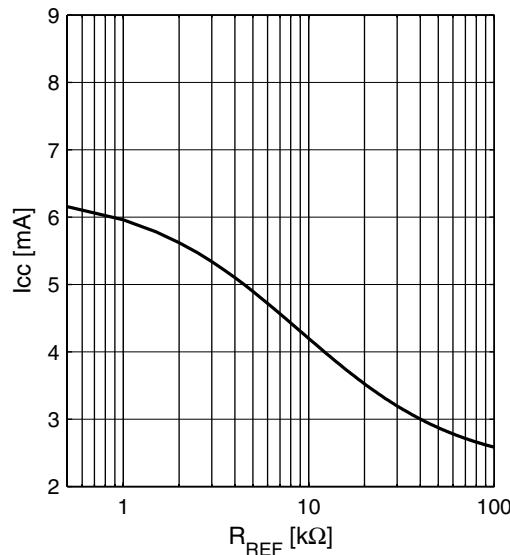
2.6 Supply current characteristics; $T_A = 25^\circ\text{C}$

Supply current high / mid gain mode versus reference resistor R_{REF} (see [Figure 2 on page 25](#) for reference resistor; low gain mode supply current is independent of reference resistor).

Supply Current Midband $I_{\text{CC}} = f(R_{\text{REF}})$
 $V_{\text{CC}} = 2.8 \text{ V}$



Supply Current Lowband $I_{\text{CC}} = f(R_{\text{REF}})$
 $V_{\text{CC}} = 2.8 \text{ V}$

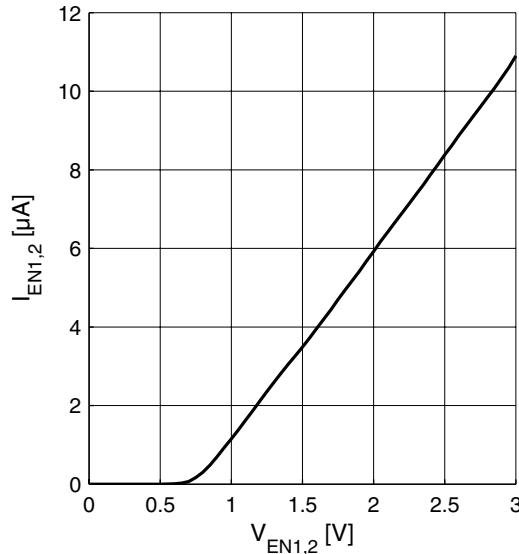


Logic Signal Characteristics; $T_A = 25^\circ\text{C}$

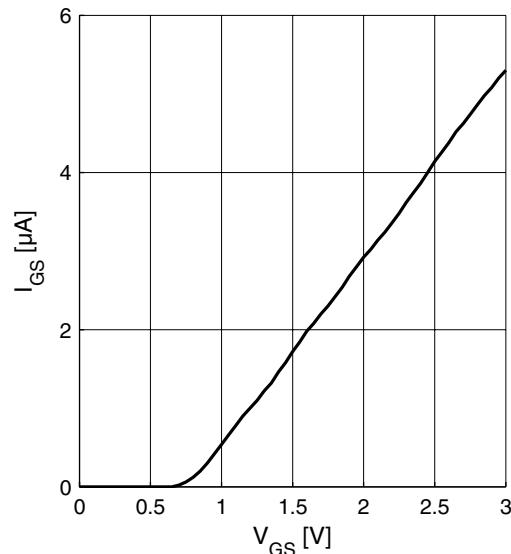
2.7 Logic Signal Characteristics; $T_A = 25^\circ\text{C}$

Current consumption of logic inputs VEN1, VEN2, VGS

Logic currents $I_{\text{EN}1,2} = f(V_{\text{EN}1,2})$
 $V_{\text{CC}} = 2.8 \text{ V}$



Logic currents $I_{\text{GS}} = f(V_{\text{GS}})$
 $V_{\text{CC}} = 2.8 \text{ V}$



2.8 Switching Times

Table 7 Typical switching times; $T_A = -30 \dots 85^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Settling time gainstep	t_{GS}		1		μs	Switching LG \leftrightarrow HG all bands
Settling time bandselect	t_{BS}		1		μs	Switching from any band to a different band

Measured RF Characteristics Low Band

2.9 Measured RF Characteristics Low Band

2.9.1 Measured RF Characteristics UMTS Bands V / VI

Table 8 Typical Characteristics 800 MHz Band, $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range band V		869		894	MHz	
Pass band range band VI		875		885	MHz	
Current consumption	I_{CCHG}		3.4		mA	High gain mode
	I_{CCLG}		0.65		mA	Low gain mode
Gain	S_{21HG}		16.1		dB	High gain mode
	S_{21LG}		-7.5		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-36		dB	High gain mode
	S_{12LG}		-8		dB	Low gain mode
Noise figure	NF_{HG}		1.1		dB	High gain mode
	NF_{LG}		7.5		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-17		dB	50 Ω , high gain mode
	S_{11LG}		-17		dB	50 Ω , low gain mode
Output return loss ¹⁾	S_{22HG}		-17		dB	50 Ω , high gain mode
	S_{22LG}		-13		dB	50 Ω , low gain mode
Stability factor ²⁾	k		>2.3			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-6		dBm	High gain mode
	IP_{1dBBLG}		-8		dBm	Low gain mode
$f_1 - f_2 = 1 \text{ MHz}$ $P_{f1} = P_{f2} = -37 \text{ dBm}$	$IIP3_{HG}$		-7		dBm	High gain mode
	$IIP3_{LG}$		2		dBm	Low gain mode

1) Verified by random sampling; not 100% RF tested

2) Not tested in production; guaranteed by device design

Measured RF Characteristics Low Band
2.9.2 Measured RF Characteristics UMTS Band VIII
Table 9 Typical Characteristics 900 MHz Band, $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range		925		960	MHz	
Current consumption	I_{CCHG}		3.4		mA	High gain mode
	I_{CCLG}		0.65		mA	Low gain mode
Gain	S_{21HG}		16.1		dB	High gain mode
	S_{21LG}		-7.1		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-36		dB	High gain mode
	S_{12LG}		-7		dB	Low gain mode
Noise figure	NF_{HG}		1.1		dB	High gain mode
	NF_{LG}		7.1		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-16		dB	50 Ω, high gain mode
	S_{11LG}		-15		dB	50 Ω, low gain mode
Output return loss ¹⁾	S_{22HG}		-15		dB	50 Ω, high gain mode
	S_{22LG}		-16		dB	50 Ω, low gain mode
Stability factor ²⁾	k		>2.3			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-5		dBm	High gain mode
	IP_{1dBHG}		-8		dBm	Low gain mode
Inband IIP3 ¹⁾ $f_1 - f_2 = 1 \text{ MHz}$ $P_{f1} = P_{f2} = -37 \text{ dBm}$	$IIP3_{HG}$ $IIP3_{LG}$		-6 2		dBm	High gain mode Low gain mode

1) Verified by random sampling; not 100% RF tested

2) Not tested in production; guaranteed by device design

Measured RF Characteristics Mid Band

2.10 Measured RF Characteristics Mid Band

2.10.1 Measured RF Characteristics UMTS Band II

Table 10 Typical Characteristics 1900 MHz Band, $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range		1930		1990	MHz	
Current consumption	I_{CCHG}		3.4		mA	High gain mode
	I_{CCLG}		0.65		mA	Low gain mode
Gain	S_{21HG}		16.0		dB	High gain mode
	S_{21LG}		-7.8		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-35		dB	High gain mode
	S_{12LG}		-8		dB	Low gain mode
Noise figure	NF_{HG}		1.1		dB	High gain mode
	NF_{LG}		7.8		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-19		dB	50 Ω , high gain mode
	S_{11LG}		-18		dB	50 Ω , low gain mode
Output return loss ¹⁾	S_{22HG}		-20		dB	50 Ω , high gain mode
	S_{22LG}		-15		dB	50 Ω , low gain mode
Stability factor ²⁾	k		>2.4			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-7		dBm	High gain mode
	IP_{1dBHG}		-7		dBm	Low gain mode
Inband IIP3 ¹⁾ $f_1 - f_2 = 1 \text{ MHz}$ $P_{f1} = P_{f2} = -37 \text{ dBm}$	$IIP3_{HG}$ $IIP3_{LG}$		-6 3		dBm	High gain mode Low gain mode

1) Verified by random sampling; not 100% RF tested

2) Not tested in production; guaranteed by device design

Measured RF Characteristics Mid Band
2.10.2 Measured RF Characteristics UMTS Bands III / IX
Table 11 Typical Characteristics 1800 MHz Band, $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range band III		1805		1880	MHz	
Pass band range band IX		1844.9		1879.9	MHz	
Current consumption	I_{CCHG}		3.4		mA	High gain mode
	I_{CCLG}		0.65		mA	Low gain mode
Gain	S_{21HG}		16.2		dB	High gain mode
	S_{21LG}		-8.7		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-36		dB	High gain mode
	S_{12LG}		-9		dB	Low gain mode
Noise figure	NF_{HG}		1.0		dB	High gain mode
	NF_{LG}		8.7		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-13		dB	50 Ω , high gain mode
	S_{11LG}		-14		dB	50 Ω , low gain mode
Output return loss ¹⁾	S_{22HG}		-19		dB	50 Ω , high gain mode
	S_{22LG}		-15		dB	50 Ω , low gain mode
Stability factor ²⁾	k		>2.5			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-7		dBm	High gain mode
	IP_{1dBHG}		-6		dBm	Low gain mode
$f_1 - f_2 = 1 \text{ MHz}$ $P_{f1} = P_{f2} = -37 \text{ dBm}$	$IIP3_{HG}$		-5		dBm	High gain mode
	$IIP3_{LG}$		3		dBm	Low gain mode

1) Verified by random sampling; not 100% RF tested

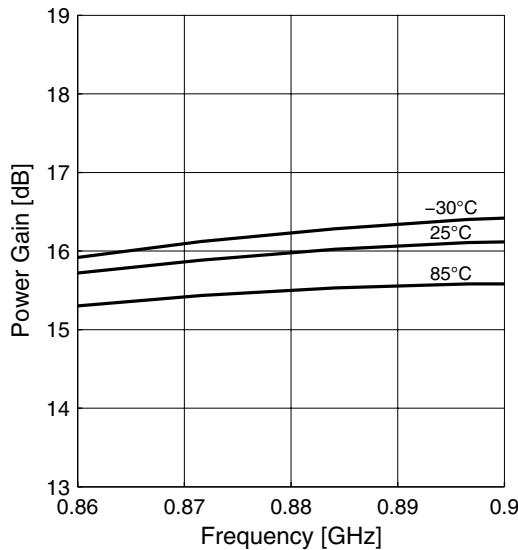
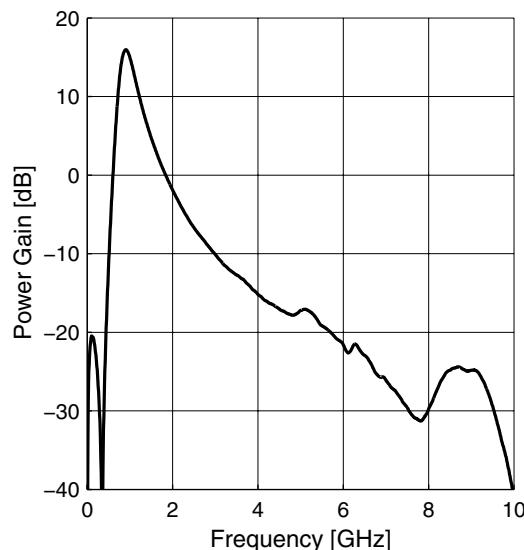
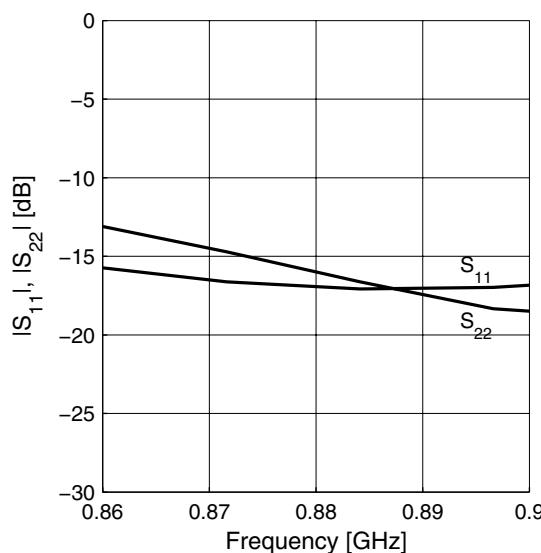
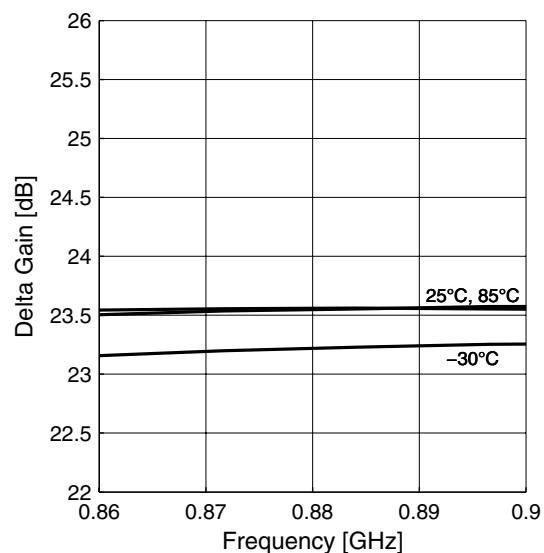
2) Not tested in production; guaranteed by device design

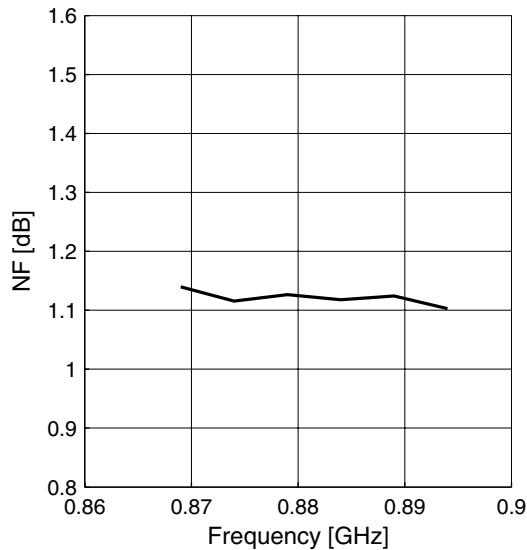
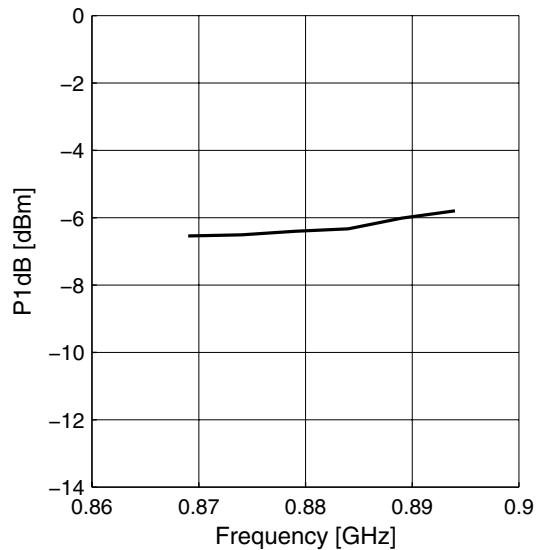
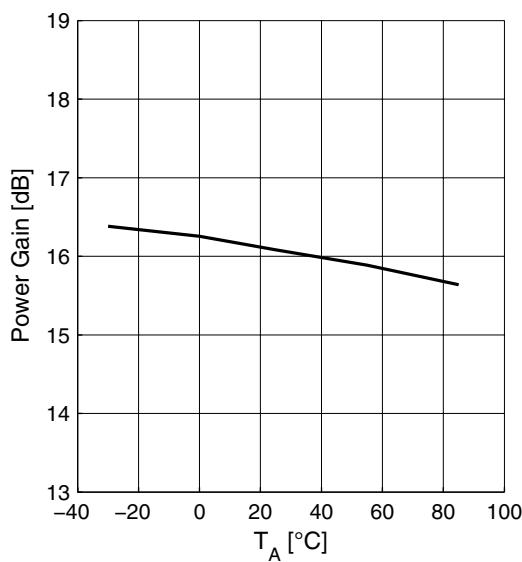
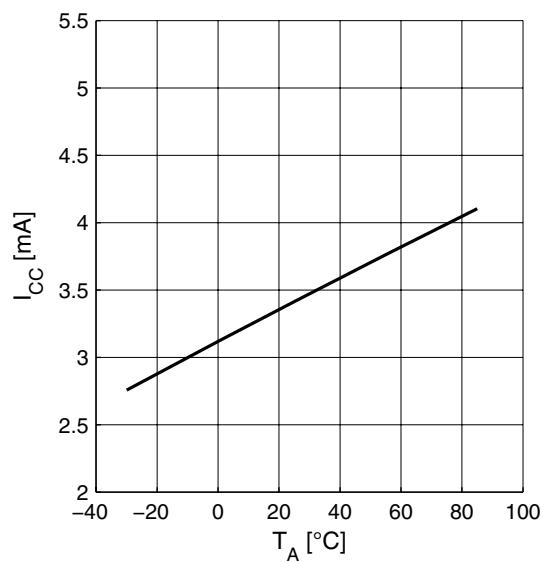
Measured RF Characteristics Mid Band
2.10.3 Measured RF Characteristics UMTS Band IV
Table 12 Typical Characteristics 2100 MHz Band, $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$

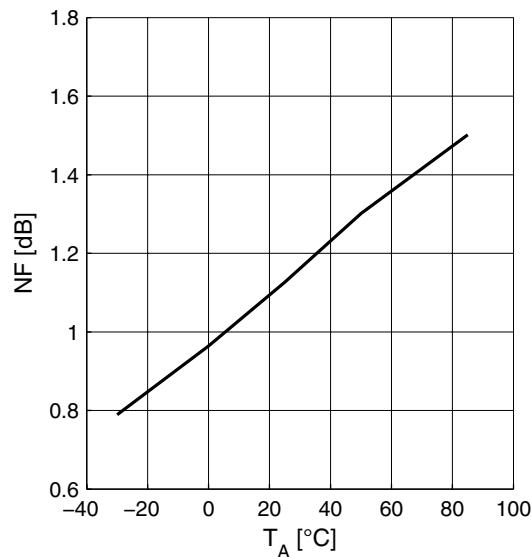
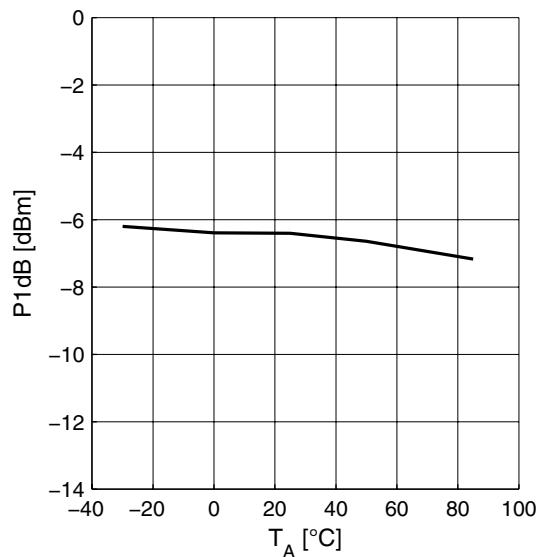
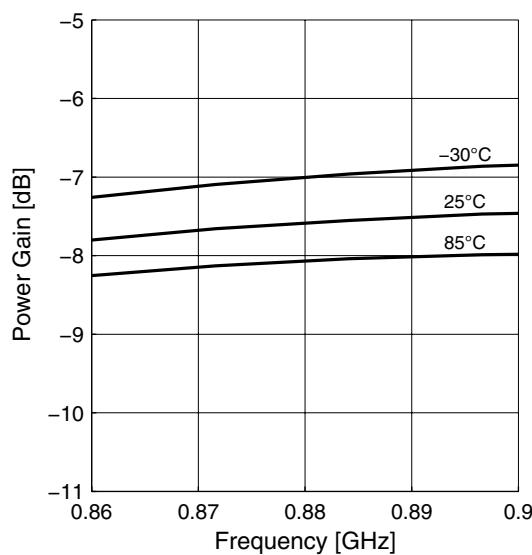
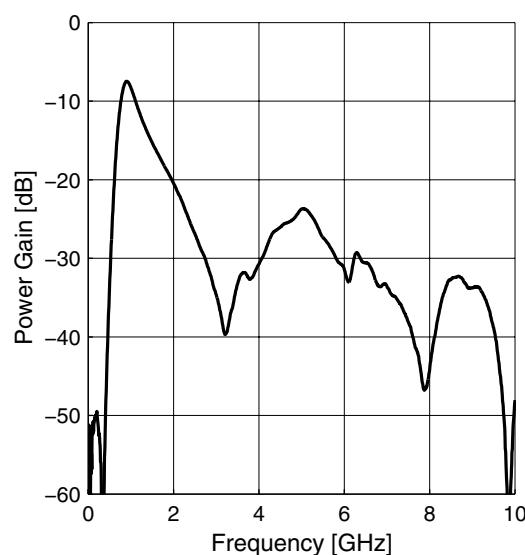
Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Pass band range		2110		2155	MHz	
Current consumption	I_{CCHG}		3.4		mA	High gain mode
	I_{CCLG}		0.65		mA	Low gain mode
Gain	S_{21HG}		15.8		dB	High gain mode
	S_{21LG}		-7.0		dB	Low gain mode
Reverse Isolation ¹⁾	S_{12HG}		-34		dB	High gain mode
	S_{12LG}		-7		dB	Low gain mode
Noise figure	NF_{HG}		1.1		dB	High gain mode
	NF_{LG}		7		dB	Low gain mode
Input return loss ¹⁾	S_{11HG}		-19		dB	50 Ω, high gain mode
	S_{11LG}		-14		dB	50 Ω, low gain mode
Output return loss ¹⁾	S_{22HG}		-19		dB	50 Ω, high gain mode
	S_{22LG}		-15		dB	50 Ω, low gain mode
Stability factor ²⁾	k		>2.3			DC to 10 GHz; all gain modes
Input compression point ¹⁾	IP_{1dBHG}		-7		dBm	High gain mode
	IP_{1dBHG}		-4		dBm	Low gain mode
Inband IIP3 ¹⁾ $f_1 - f_2 = 1 \text{ MHz}$ $P_{f1} = P_{f2} = -37 \text{ dBm}$	$IIP3_{HG}$ $IIP3_{LG}$		-4 6		dBm	High gain mode Low gain mode

1) Verified by random sampling; not 100% RF tested

2) Not tested in production; guaranteed by device design

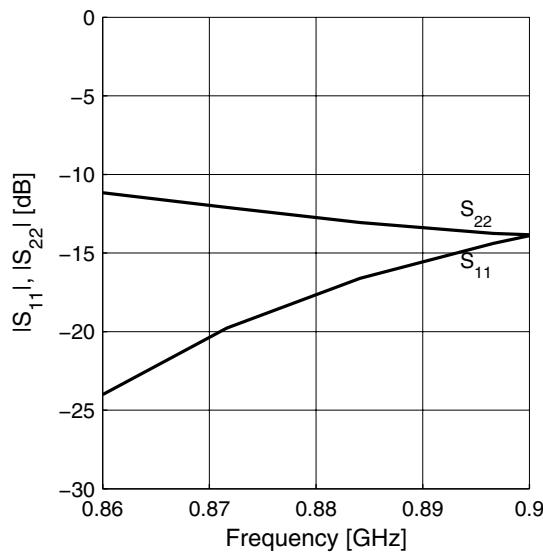
Measured Performance Low Band (Band V) High Gain Mode vs. Frequency
2.11 Measured Performance Low Band (Band V) High Gain Mode vs. Frequency
 $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 2.8 \text{ V}$, $V_{EN1} = 0 \text{ V}$, $V_{EN2} = 2.8 \text{ V}$
Power Gain $|S_{21}| = f(f)$

Power Gain wideband $|S_{21}| = f(f)$

Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

Gainstep HG-LG $|\Delta S_{21}| = f(f)$


Measured Performance Low Band (Band V) High Gain Mode vs. Temperature
Noise Figure $NF = f(f)$

Input Compression $P1dB = f(f)$

2.12 Measured Performance Low Band (Band V) High Gain Mode vs. Temperature
 $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 2.8 \text{ V}$, $V_{EN1} = 0 \text{ V}$, $V_{EN2} = 2.8 \text{ V}$, $f = 880 \text{ MHz}$
Power Gain $|S_{21}| = f(T_A)$

Supply Current $I_{CC} = f(T_A)$


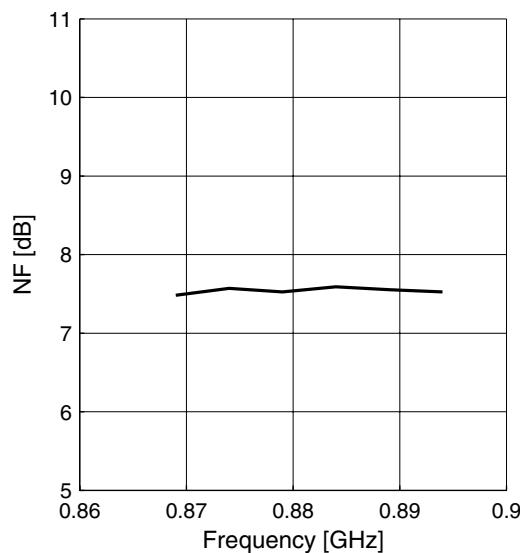
Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency
Noise Figure $NF = f(T_A)$

Input Compression $P1dB = f(T_A)$

2.13 Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency
 $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $V_{EN1} = 0 \text{ V}$, $V_{EN2} = 2.8 \text{ V}$
Power Gain $|S_{21}| = f(f)$

Power Gain wideband $|S_{21}| = f(f)$


Measured Performance Low Band (Band V) Low Gain Mode vs. Frequency

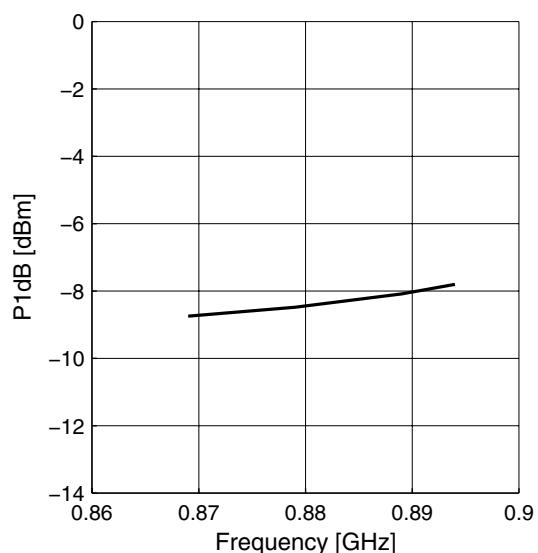
Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

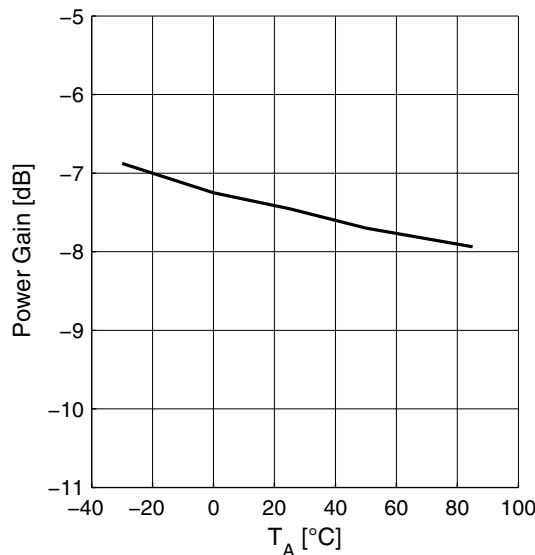
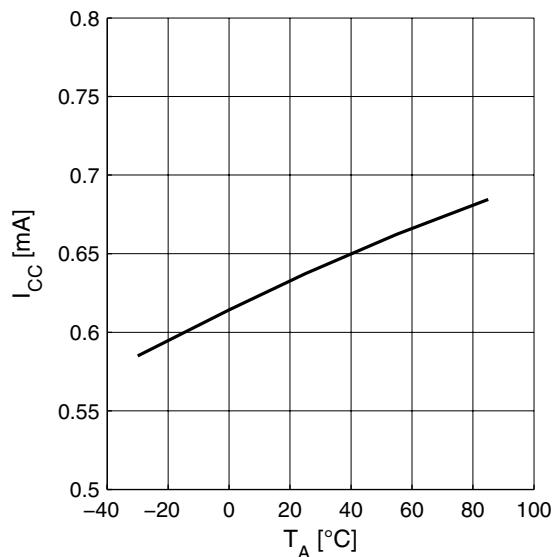
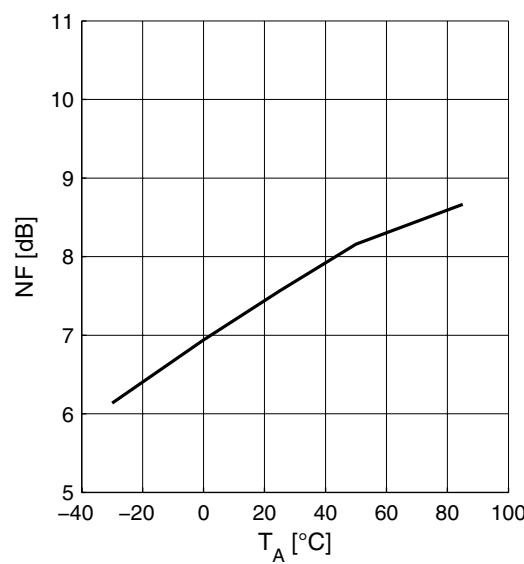
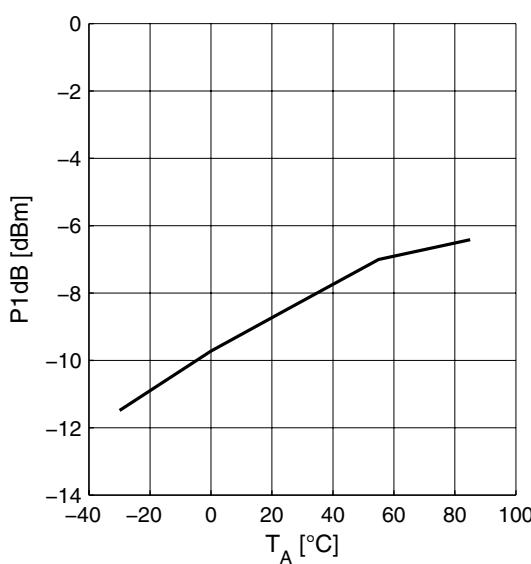


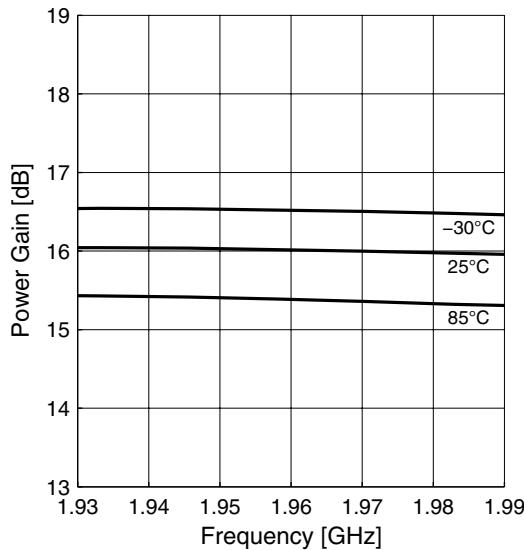
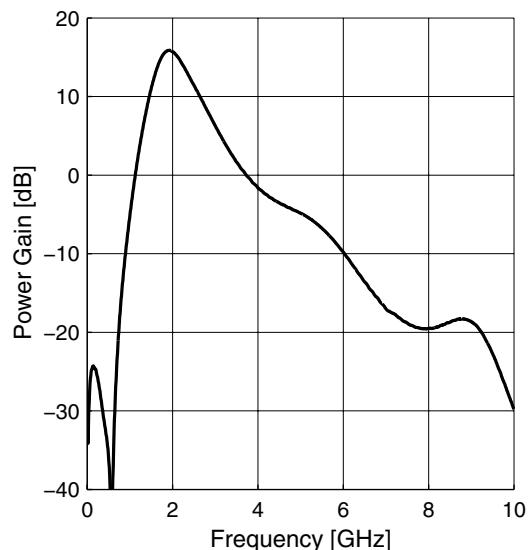
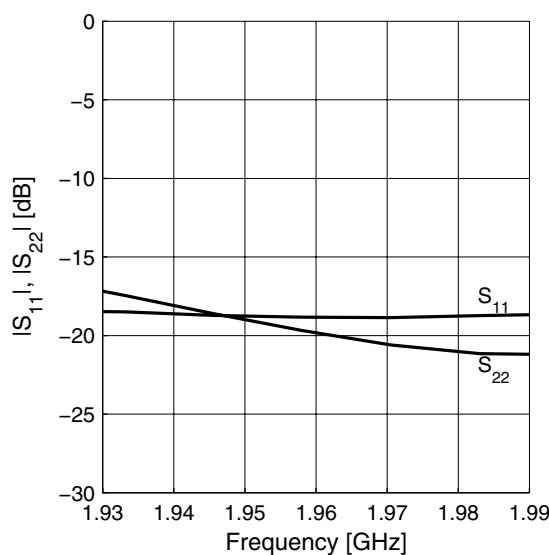
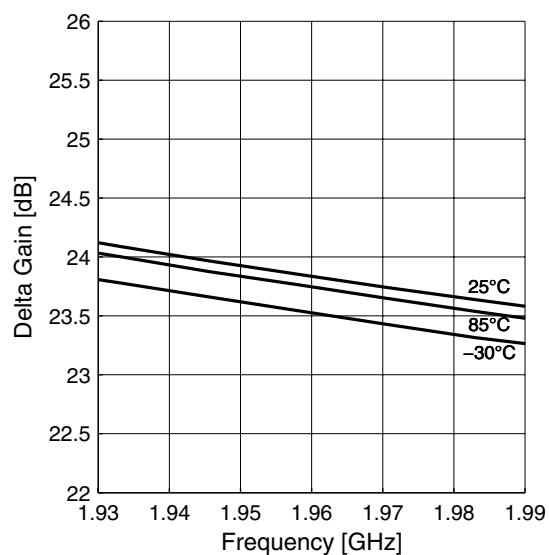
Noise Figure $NF = f(f)$

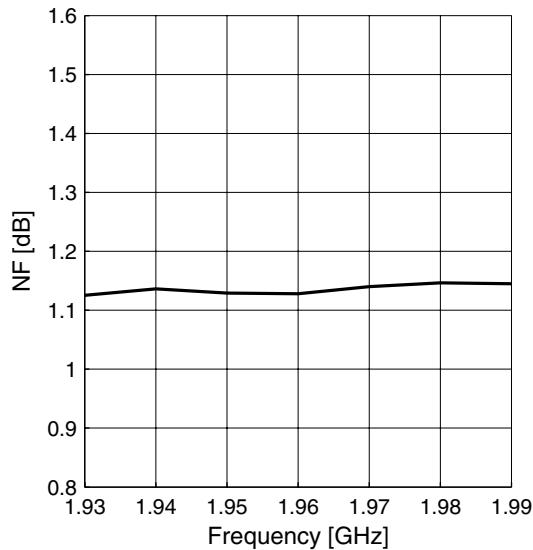
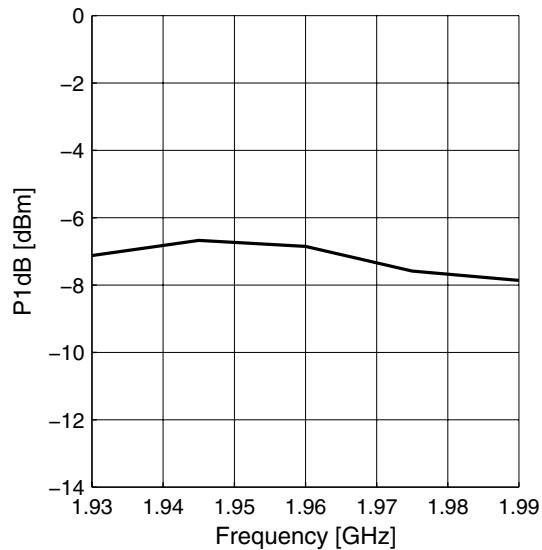
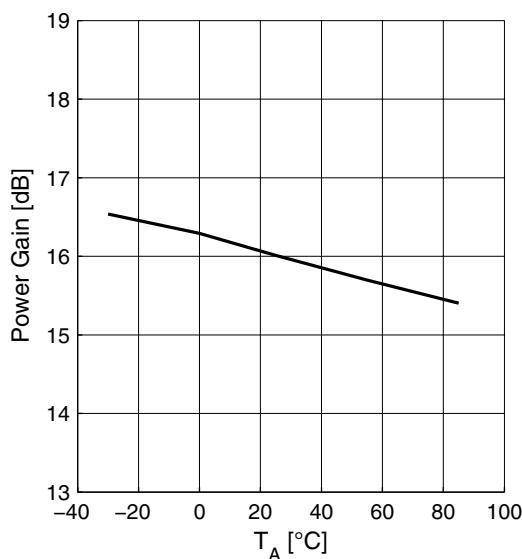
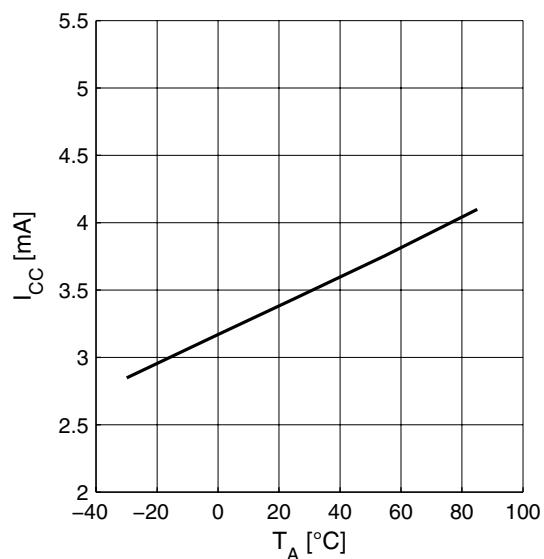


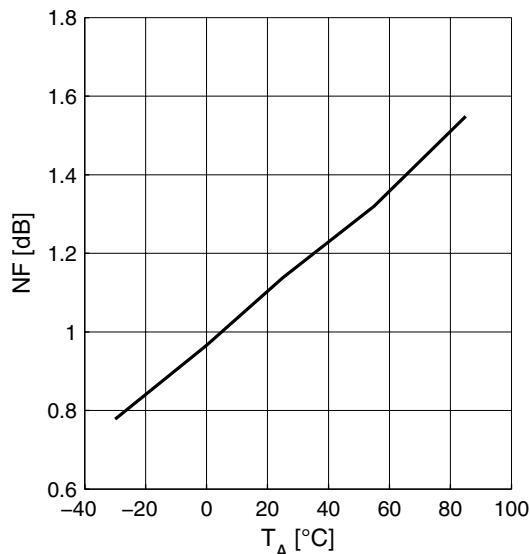
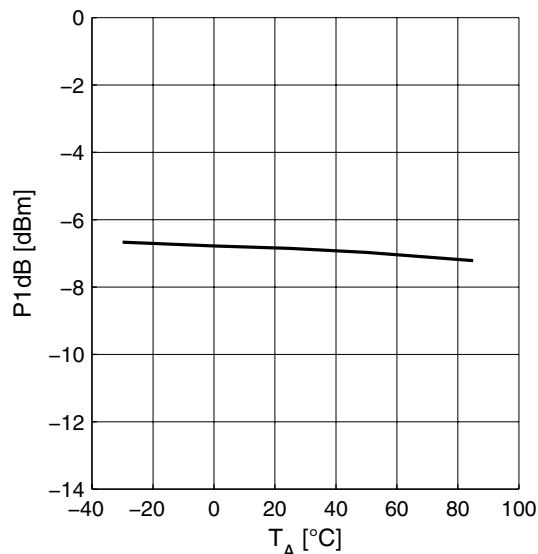
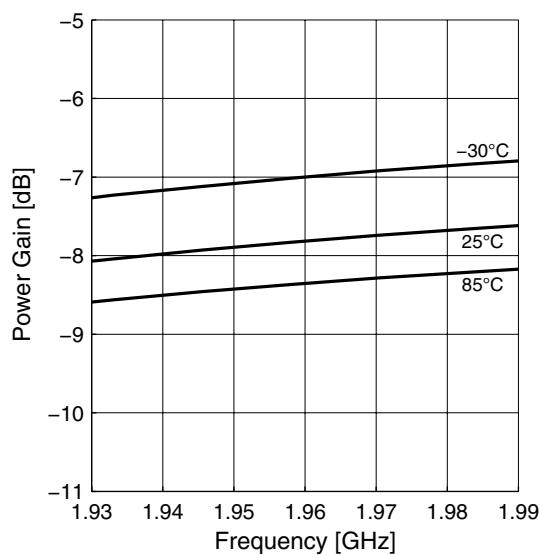
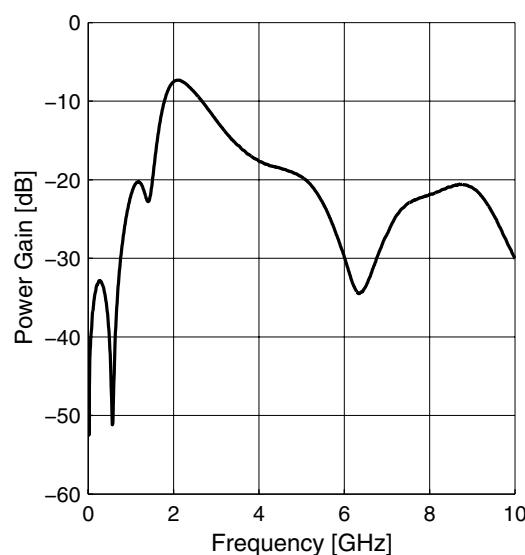
Input Compression $P1dB = f(f)$



Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature
2.14 Measured Performance Low Band (Band V) Low Gain Mode vs. Temperature
 $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $V_{EN1} = 0 \text{ V}$, $V_{EN2} = 2.8 \text{ V}$, $f = 880 \text{ MHz}$
Power Gain $|S_{21}| = f(T_A)$

Supply Current $I_{CC} = f(T_A)$

Noise Figure $NF = f(T_A)$

Input Compression $P1dB = f(T_A)$


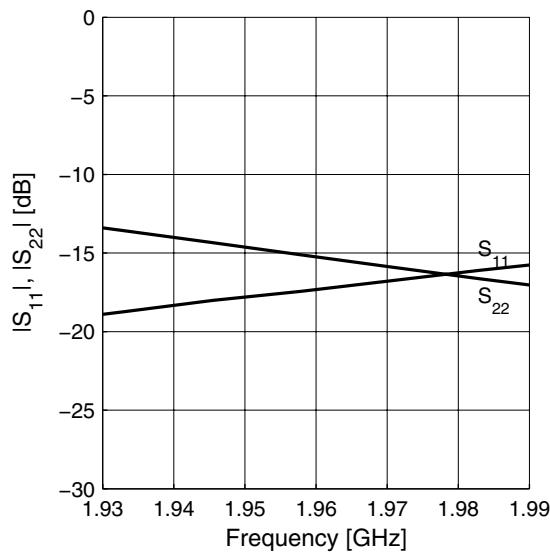
Measured Performance Mid Band (Band II) High Gain Mode vs. Frequency
2.15 Measured Performance Mid Band (Band II) High Gain Mode vs. Frequency
 $T_A = 25 \text{ }^{\circ}\text{C}$, $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 2.8 \text{ V}$, $V_{EN1} = 2.8 \text{ V}$, $V_{EN2} = 0 \text{ V}$
Power Gain $|S_{21}| = f(f)$

Power Gain wideband $|S_{21}| = f(f)$

Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

Gainstep HG-LG $|\Delta S_{21}| = f(f)$


Measured Performance Mid Band (Band II) High Gain Mode vs. Temperature
Noise Figure $NF = f(f)$

Input Compression $P1dB = f(f)$

2.16 Measured Performance Mid Band (Band II) High Gain Mode vs. Temperature
 $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 2.8 \text{ V}$, $V_{EN1} = 2.8 \text{ V}$, $V_{EN2} = 0 \text{ V}$, $f = 1960 \text{ MHz}$
Power Gain $|S_{21}| = f(T_A)$

Supply Current $I_{CC} = f(T_A)$


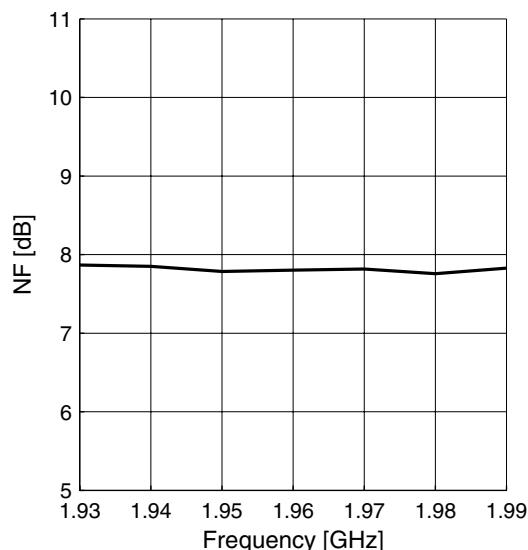
Measured Performance Mid Band (Band II) Low Gain Mode vs. Frequency
Noise Figure $NF = f(T_A)$

Input Compression $P1dB = f(T_A)$

2.17 Measured Performance Mid Band (Band II) Low Gain Mode vs. Frequency
 $T_A = 25^\circ\text{C}$, $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $V_{EN1} = 2.8 \text{ V}$, $V_{EN2} = 0 \text{ V}$
Power Gain $|S_{21}| = f(f)$

Power Gain wideband $|S_{21}| = f(f)$


Measured Performance Mid Band (Band II) Low Gain Mode vs. Frequency

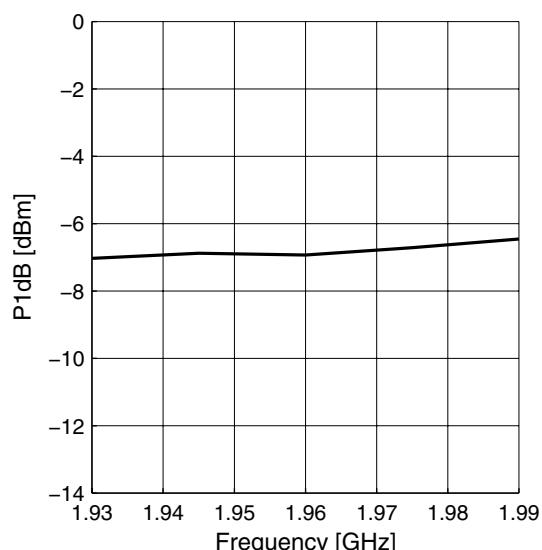
Matching $|S_{11}| = f(f)$, $|S_{22}| = f(f)$

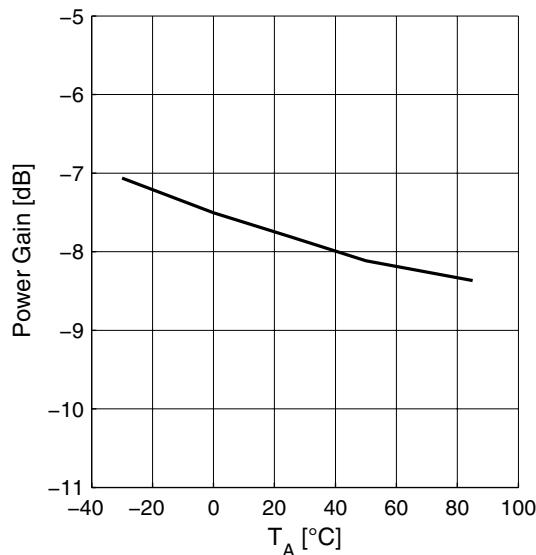
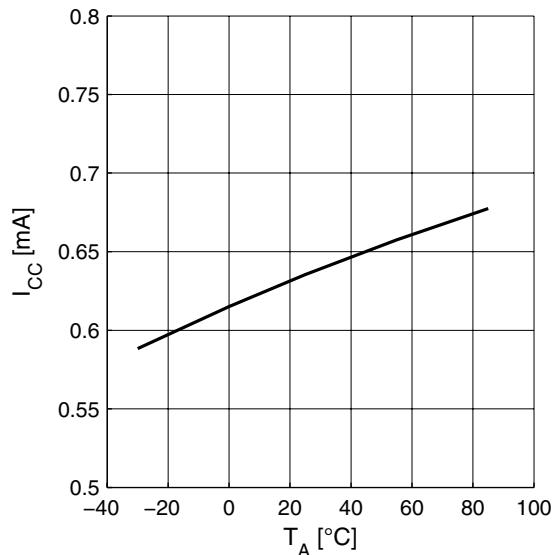
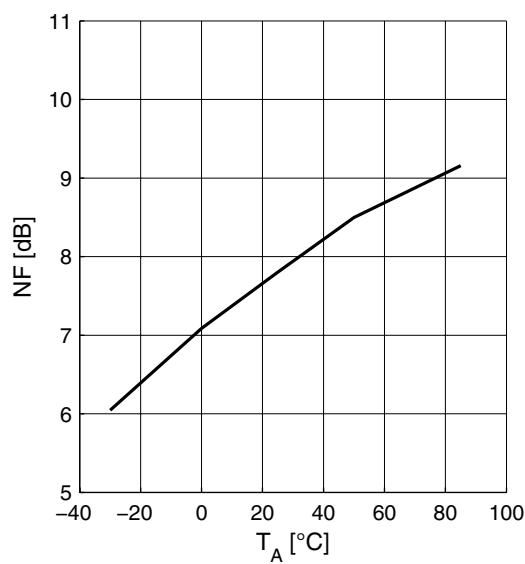
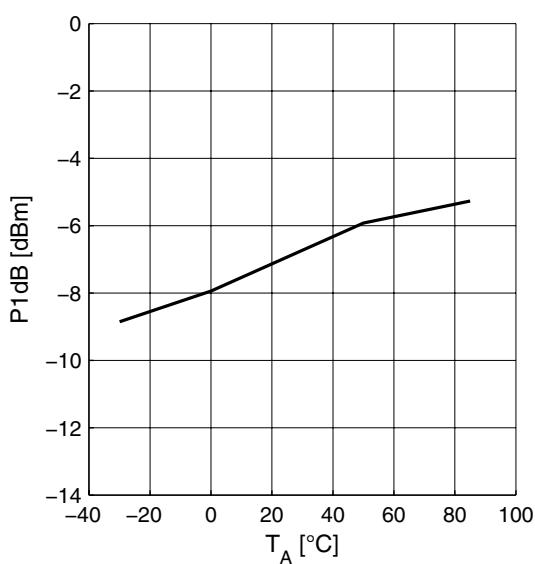


Noise Figure $NF = f(f)$



Input Compression $P1dB = f(f)$



Measured Performance Mid Band (Band II) Low Gain Mode vs. Temperature
2.18 Measured Performance Mid Band (Band II) Low Gain Mode vs. Temperature
 $V_{CC} = 2.8 \text{ V}$, $V_{GS} = 0 \text{ V}$, $V_{EN1} = 2.8 \text{ V}$, $V_{EN2} = 0 \text{ V}$, $f = 1960 \text{ MHz}$
Power Gain $|S_{21}| = f(T_A)$

Supply Current $I_{CC} = f(T_A)$

Noise Figure $NF = f(T_A)$

Input Compression $P1dB = f(T_A)$


3 Application Circuit and Block Diagram

3.1 UMTS bands II and V Application Circuit Schematic

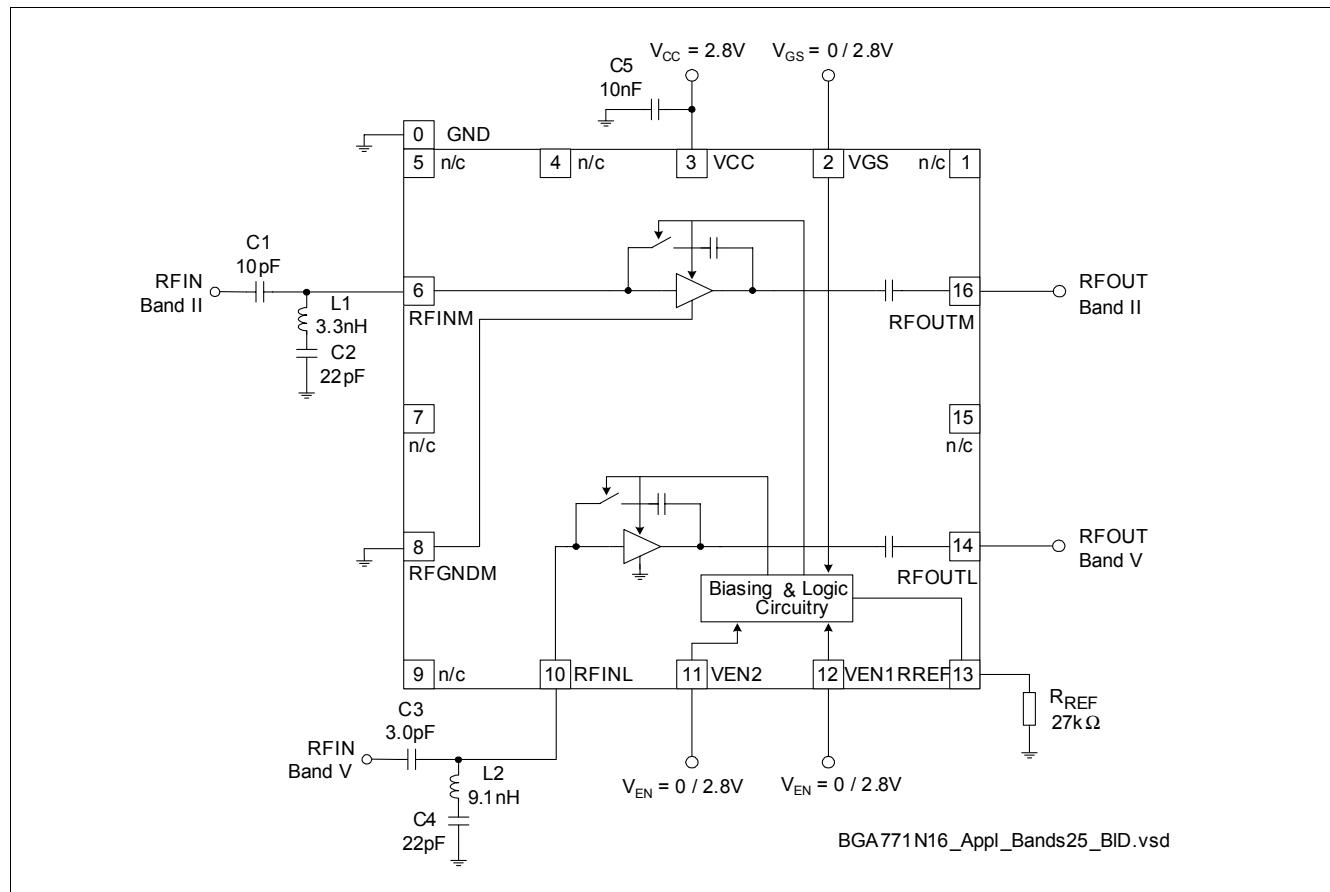


Figure 2 Application circuit with chip outline (top view)

Note: Package paddle (Pin 0) has to be RF grounded.

Table 13 Parts List

Part Number	Part Type	Manufacturer	Size	Comment
L1 ... L2	Chip inductor	Various	0402	Wirewound, Q ≈ 50
C1 ... C5	Chip capacitor	Various	0402	
RREF	Chip resistor	Various	0402	

3.2 UMTS bands III and VIII Application Circuit Schematic

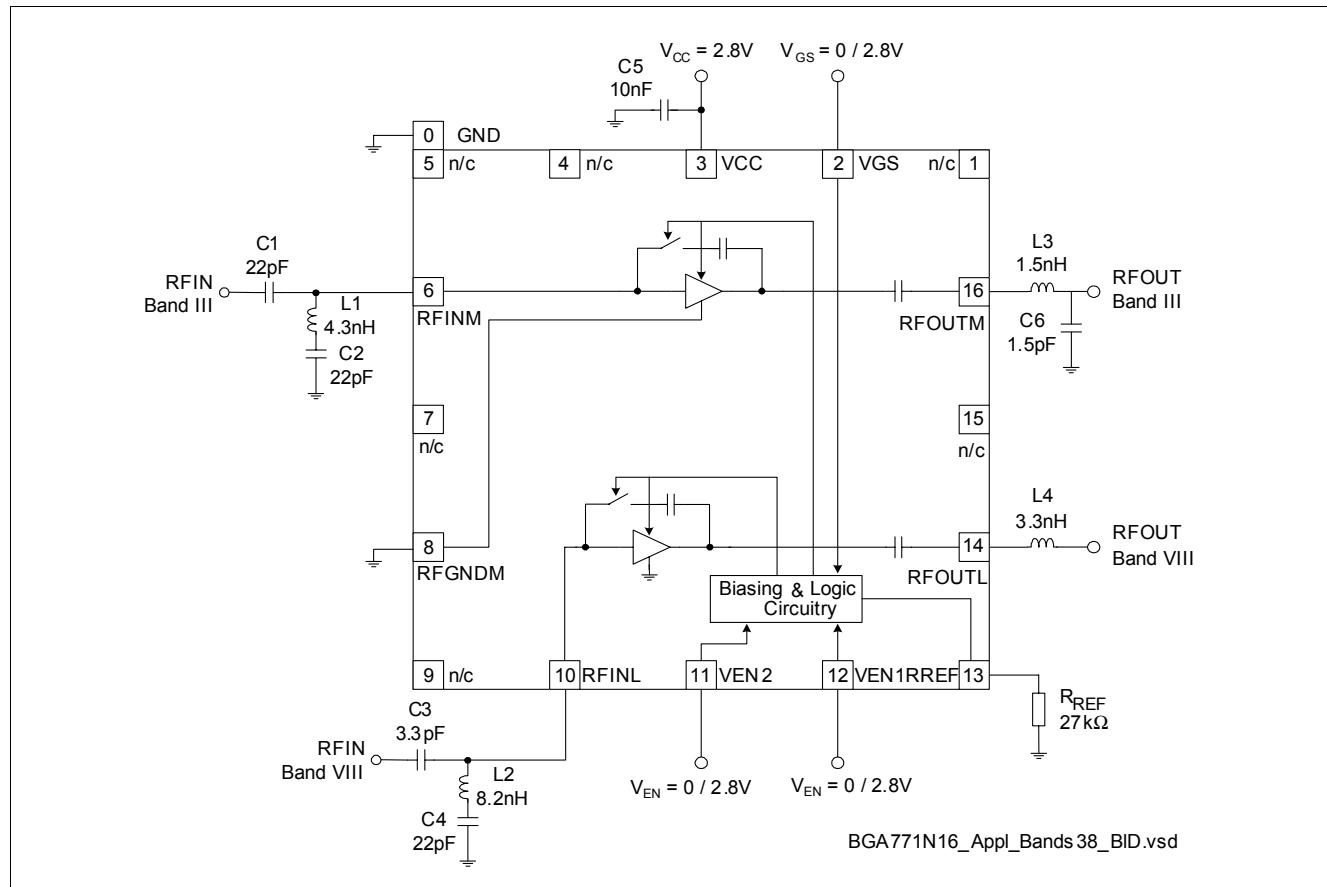


Figure 3 Application circuit with chip outline (top view)

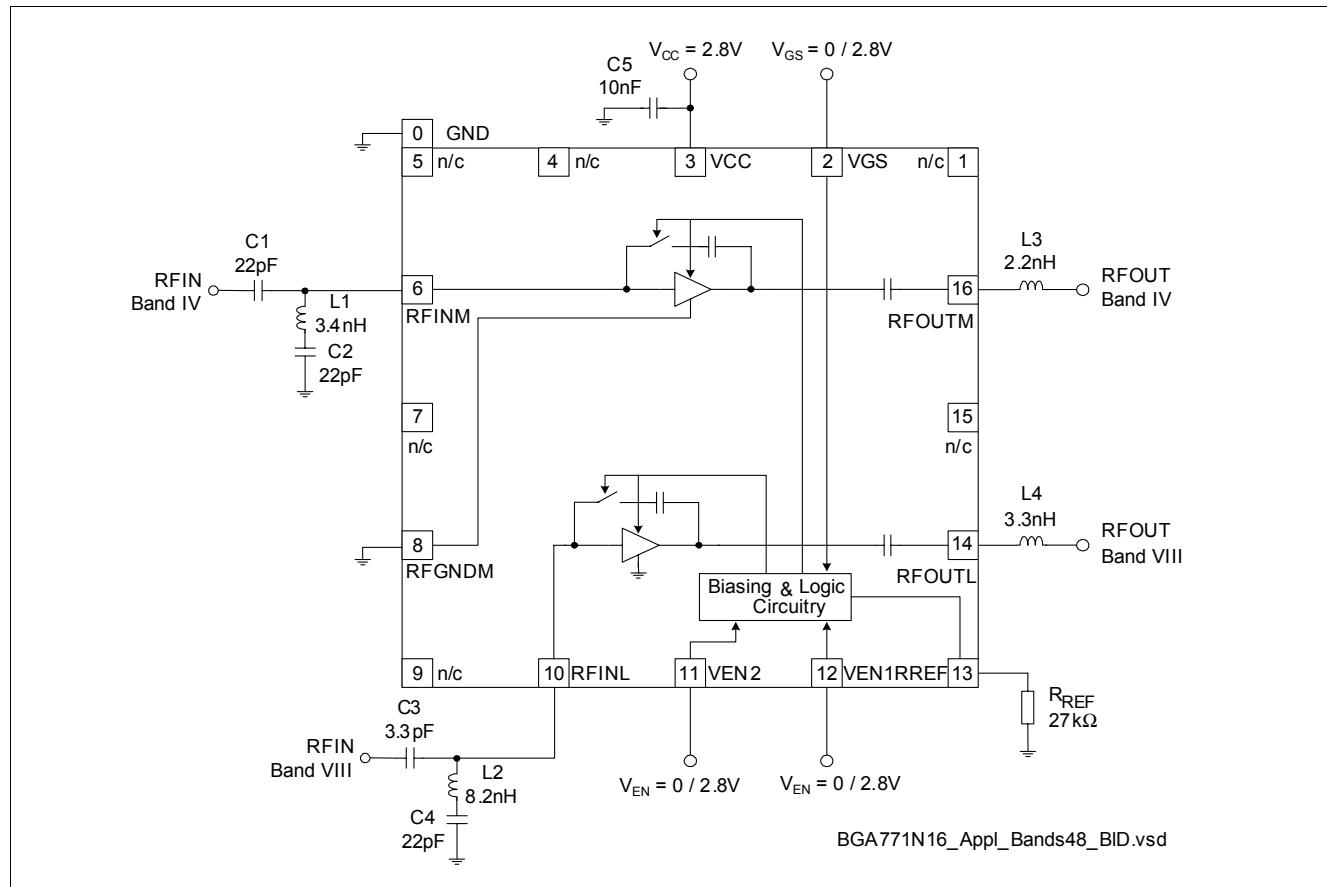
Note: Package paddle (Pin 0) has to be RF grounded.

Table 14 Parts List

Part Number	Part Type	Manufacturer	Size	Comment
L1 ... L4	Chip inductor	Various	0402	Wirewound, Q ≈ 50
C1 ... C6	Chip capacitor	Various	0402	
RREF	Chip resistor	Various	0402	

UMTS bands IV and VIII Application Circuit Schematic

3.3 UMTS bands IV and VIII Application Circuit Schematic


Figure 4 Application circuit with chip outline (top view)

Note: Package paddle (Pin 0) has to be RF grounded.

Table 15 Parts List

Part Number	Part Type	Manufacturer	Size	Comment
L1 ... L4	Chip inductor	Various	0402	Wirewound, Q ≈ 50
C1 ... C5	Chip capacitor	Various	0402	
RREF	Chip resistor	Various	0402	

3.4 Pin Definition

Table 16 Pin Definition and Function

Pin Number	Symbol	Function
0	GND	Package paddle; ground connection for low band LNA and control circuitry
1	n/c	Not connected
2	VGS	Gain step control
3	VCC	Supply voltage
4	n/c	Not connected
5	n/c	Not connected
6	RFINM	Mid band (1900/1800/2100 MHz) LNA input
7	n/c	Not connected
8	RFGNDM	Mid band LNA emitter ground
9	n/c	Not connected
10	RFINL	Low band (800/900 MHz) LNA input
11	VEN2	Band select control
12	VEN1	Band select control
13	RREF	Bias current reference resistor (high gain mode)
14	RFOUTL	Low band (800/900 MHz) LNA output
15	n/c	Not connected
16	RFOUTM	Mid band (1900/1800/2100 MHz) LNA output

3.5 Application Board

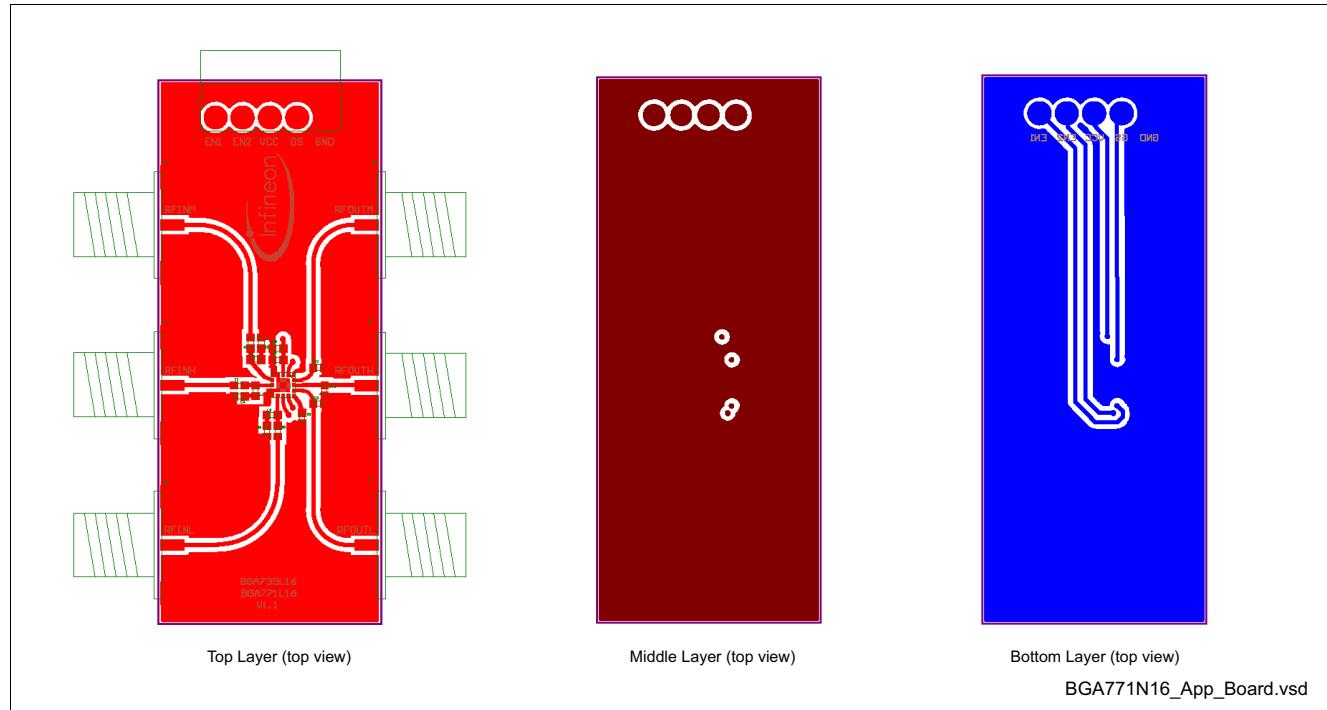


Figure 5 Application board layout on 3-layer FR4. Top layer thickness: 0.2 mm, bottom layer thickness: 0.8 mm, 17 μm Cu metallization, gold plated. Board size: 21 x 50 mm

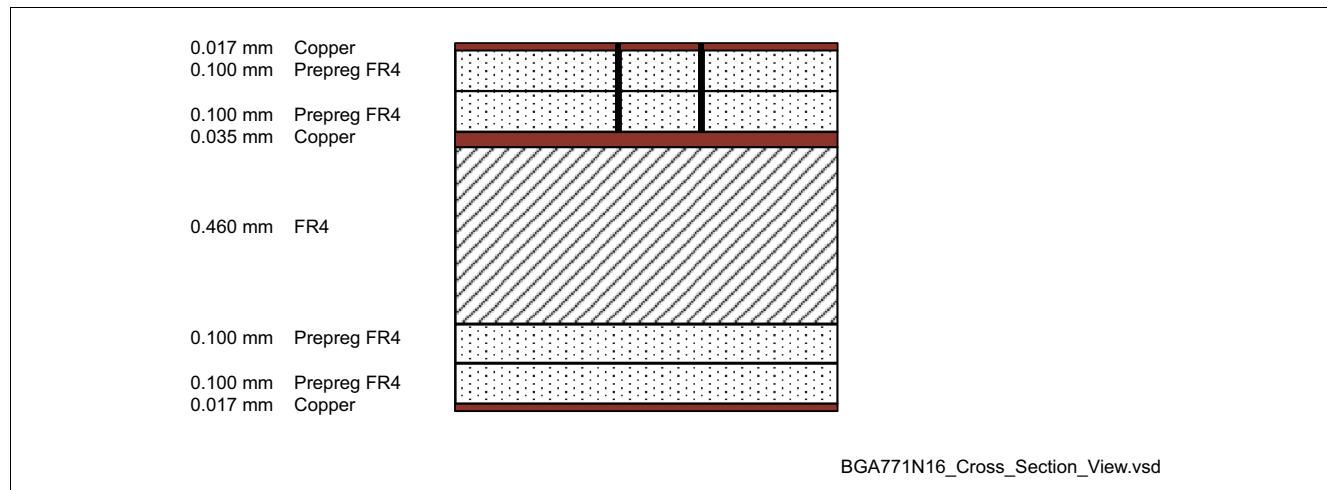
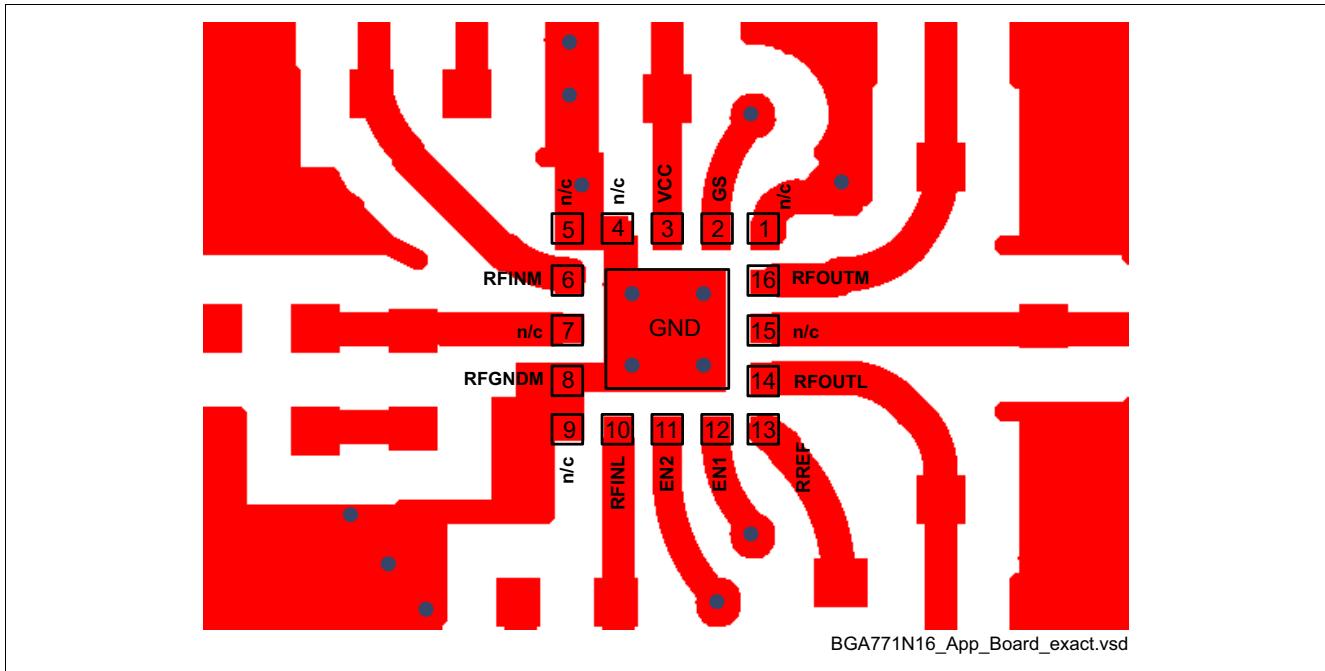


Figure 6 Cross-section view of application board

**Figure 7 Detail of application board layout**

Note: In order to achieve the same performance as given in this datasheet please follow the suggested PCB-layout as closely as possible. The position of the GND vias is critical for RF performance.

4 Physical Characteristics

4.1 Package Footprint

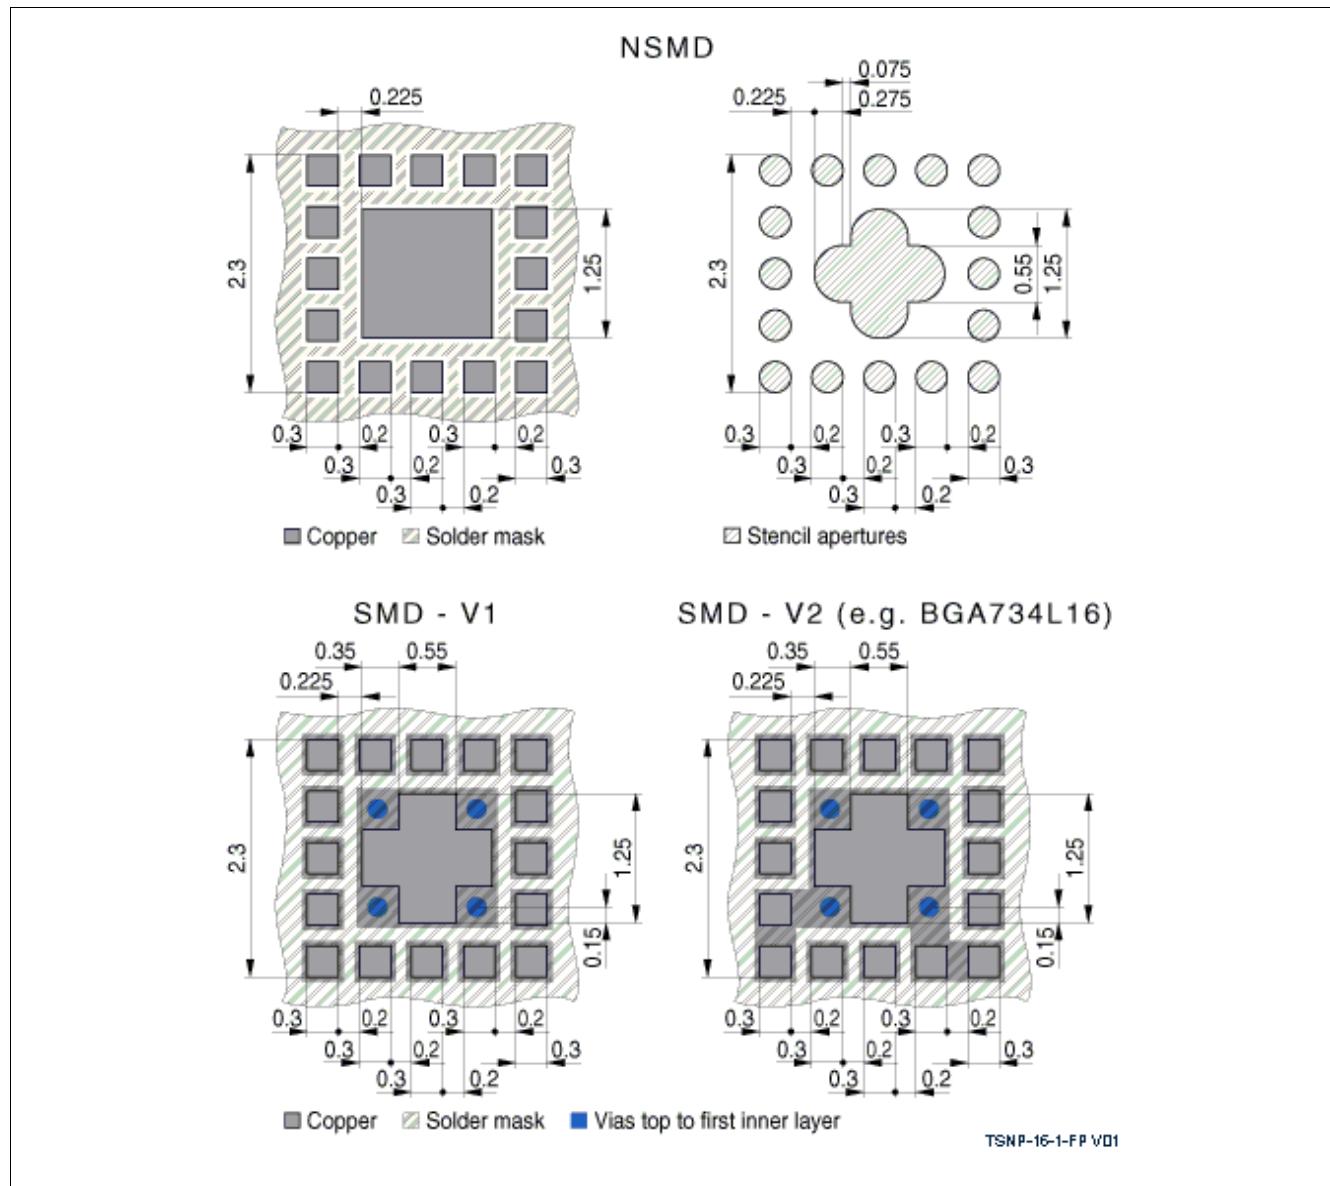


Figure 8 Recommended footprint and stencil layout for the TSNP-16-1 package

Package Dimensions

4.2 Package Dimensions

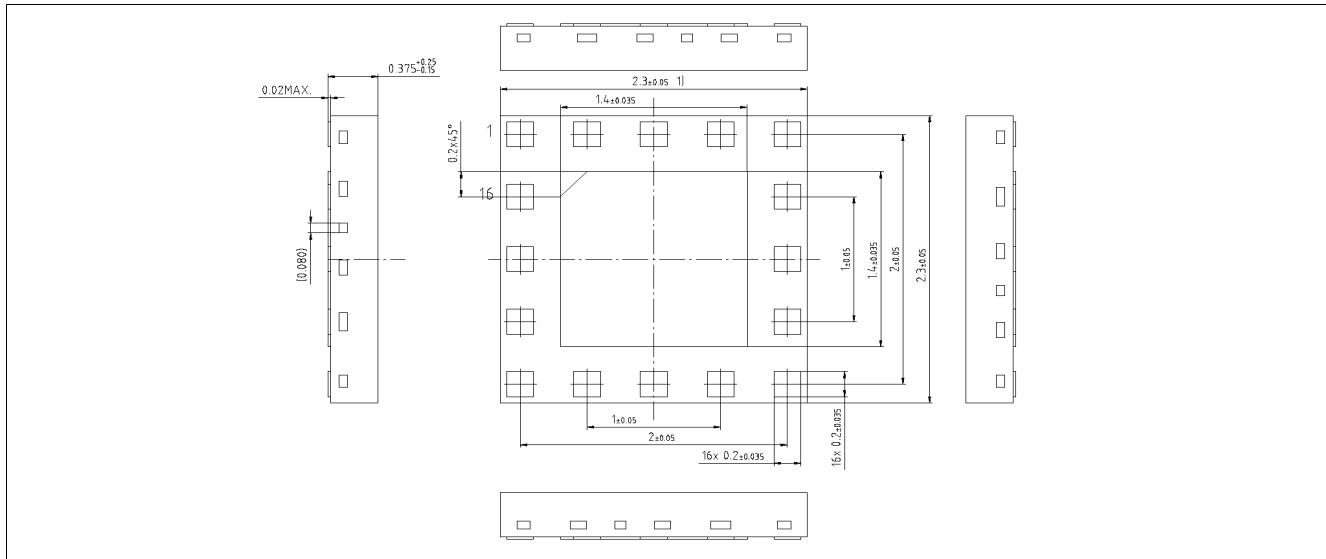


Figure 9 Package outline (top, side and bottom view)

www.infineon.com