



# Magnetic Transducer (AC)

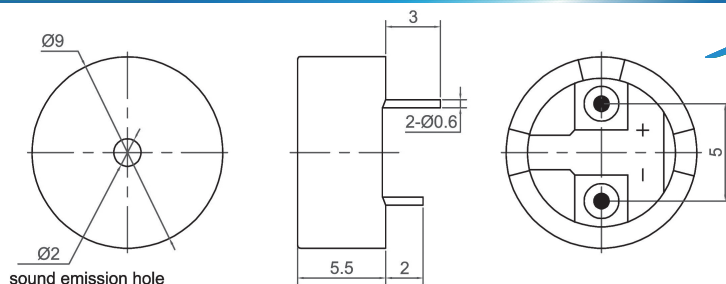


**CMT0905**



Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance ( $\Omega$ )	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ( $^{\circ}$ C)	Housing	Weight (g)
CMT0905A2731NP	1 ~ 2	1.5	80	5.5 $\pm$ 1	80 at 10cm	2731	-20 ~ +60	Noryl	1
CMT0905A3100NP	1 ~ 2	1.5	80	5.5 $\pm$ 1	80 at 10cm	3100	-20 ~ +60	Noryl	1
CMT0905E2731NP	4 ~ 8	5	100	40 $\pm$ 7.5	85 at 10cm	2731	-20 ~ +60	Noryl	1
CMT0905E3100NP	4 ~ 8	5	100	40 $\pm$ 7.5	85 at 10cm	3100	-20 ~ +60	Noryl	1




**CANOPUS**

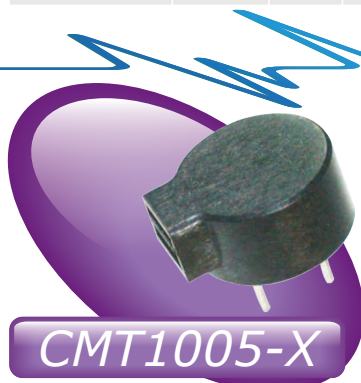

**CMT1005-X**

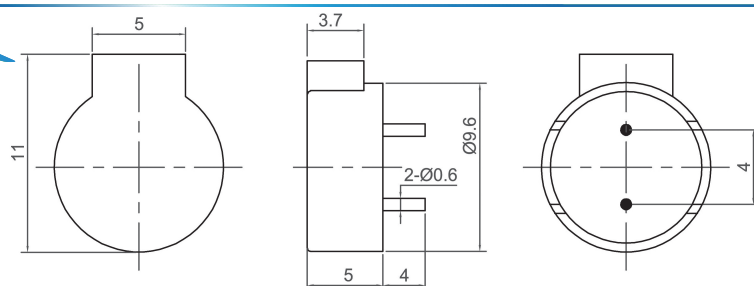


Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance ( $\Omega$ )	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ( $^{\circ}$ C)	Housing	Weight (g)
CMT1005A2731NPX	1 ~ 2	1.5	80	5.5 $\pm$ 1	80 at 10cm	2731	-20 ~ +60	Noryl	1
CMT1005A3100NPX	1 ~ 2	1.5	80	5.5 $\pm$ 1	80 at 10cm	3100	-20 ~ +60	Noryl	1
CMT1005E2731NPX	4 ~ 8	5	100	40 $\pm$ 7.5	85 at 10cm	2731	-20 ~ +60	Noryl	1
CMT1005E3100NPX	4 ~ 8	5	100	40 $\pm$ 7.5	85 at 10cm	3100	-20 ~ +60	Noryl	1

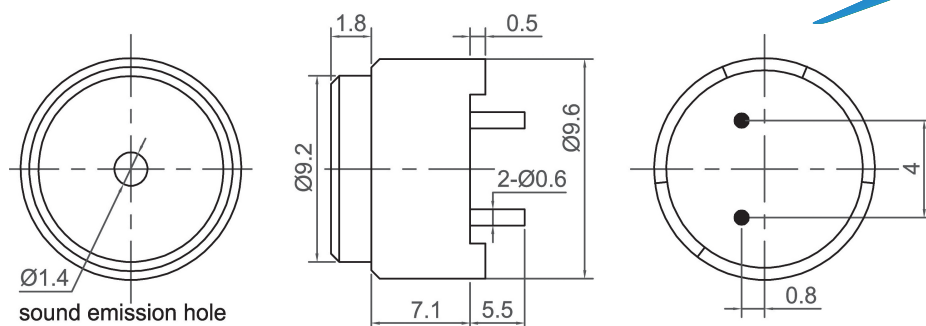

**CMT1007**

Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance ( $\Omega$ )	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ( $^{\circ}$ C)	Housing	Weight (g)
CMT1007A3100NP	1 ~ 2	1.5	80	5.5 $\pm$ 1	80 at 10cm	3100	-20 ~ +60	Noryl	2



**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216