
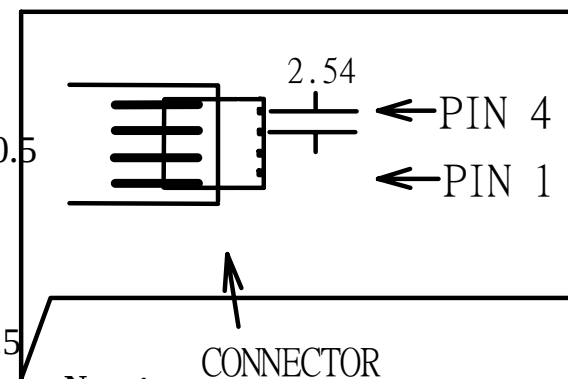


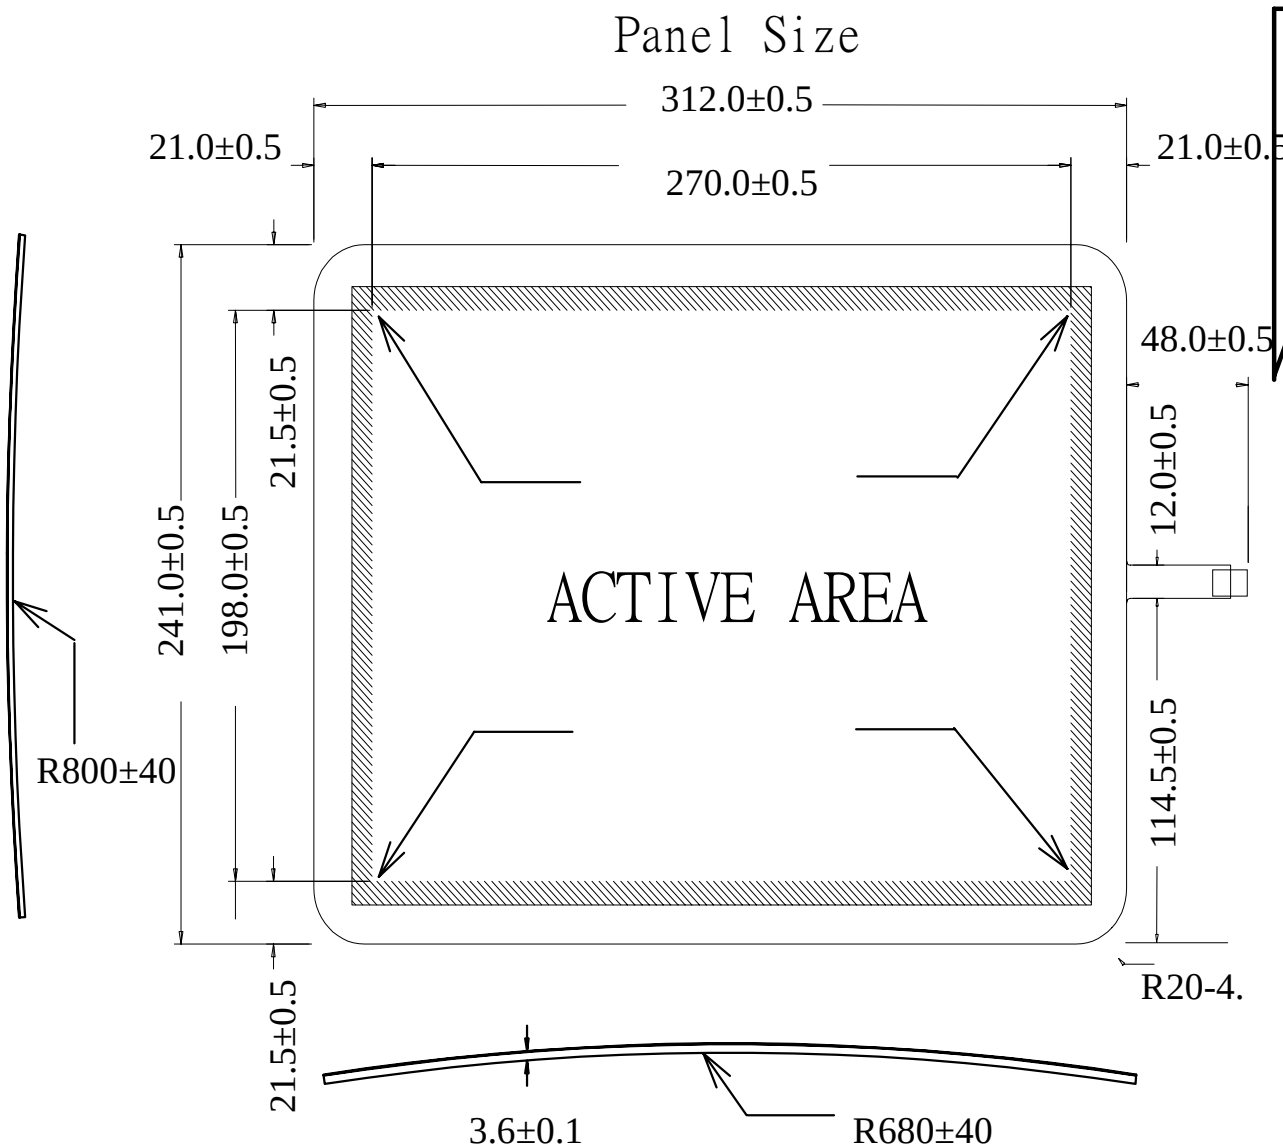

Note :

Pin 1 : Bottom

Pin 2 : Top

Pin 3 : Left

Pin 4 : Right

Pin Pitch : 2.54 mm

Total Thickness : 3.6 ± 0.2 mm

Surface Hardness : 3H

Optical Clarity : 76 %

Operating Temperature : 0°C ~ 50°C

Endurance Test : Over 1 million strikes

Operating Voltage : DC5-12V

Resistance : 200Ω ~ 900Ω

Linearity : < 1.5%

Faceplate Surface : Anti-glare coating

Operation Pressure : 35g~60g

Storage Temperature : -20°C ~ 70°C

Message Noise : 5 m sec ~ 15 m sec

Operating Current : 5mA ~ 25mA

Isolation Resistance : DC25V 20MΩ ↑

Model No	SE-AM1402			SUPER ELITE TECHNOLOGY CO., LTD	Unit:mm	Date	9 - 25 -1997
						Chang Date	02 - 25 - 1999