







# 1008CX MINIATURE RF CHIP INDUCTORS

## Designed for Wireless Products

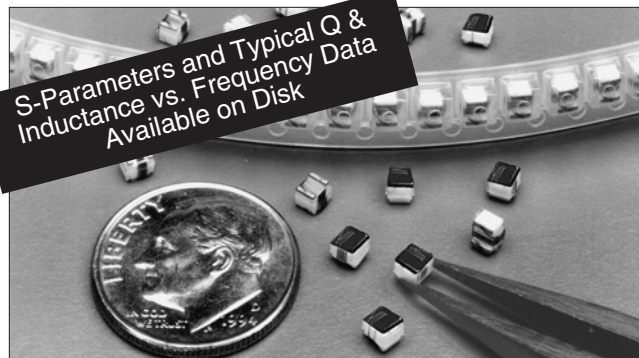

S-Parameters and Typical Q & Inductance vs. Frequency Data Available on Disk

-  Wirewound ceramic core construction
-  High Q values
-  High self resonant frequency
-  Gold terminations
-  Industry standard 1008 (2520) surface mount land pattern

### Electrical Specifications @ 25°C

Part Number	Inductance <sup>(1)</sup> (nH)	Standard Tolerance	Optional Tolerance	Q <sup>(2)</sup> Min	SRT Min <sup>(3)</sup> (MHz)	R <sub>DC</sub> <sup>(4)</sup> (Ω MAX)	I <sub>DC</sub> <sup>(5)</sup> (mA MAX)
PE-1008CX040MTG	4.7 @ 50 MHz	±20% (M)	±10% (K)	60 @ 1500 MHz	6000	0.025	1000
PE-1008CX080MTG	8.2 @ 50 MHz	±20% (M)	—	60 @ 1500 MHz	6000	0.050	1000
PE-1008CX100MTG	10 @ 50 MHz	±10% (K)	±5%	50 @ 500 MHz	5000	0.090	1000
PE-1008CX120MTG	12 @ 50 MHz	±10% (K)	±5%	65 @ 500 MHz	2300	0.090	1000
PE-1008CX150MTG	15 @ 50 MHz	±10% (K)	±5%	55 @ 500 MHz	1850	0.190	1000
PE-1008CX180MTG	18 @ 50 MHz	±10% (K)	±5%	55 @ 350 MHz	2200	0.060	1000
PE-1008CX220MTG	22 @ 50 MHz	±10% (K)	±5%	55 @ 350 MHz	1800	0.090	1000
PE-1008CX270KTG	27 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	60 @ 350 MHz	1500	0.090	1000
PE-1008CX330KTG	33 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	60 @ 350 MHz	1800	0.180	800
PE-1008CX390KTG	39 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	70 @ 350 MHz	1400	0.120	1000
PE-1008CX470KTG	47 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	70 @ 350 MHz	1200	0.075	1000
PE-1008CX560KTG	56 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	60 @ 350 MHz	1150	0.120	1000
PE-1008CX680KTG	68 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	70 @ 350 MHz	1100	0.070	1000
PE-1008CX820KTG	82 @ 50 MHz	±10% (K)	±5%, ±2%, ±1%	65 @ 350 MHz	950	0.140	950
PE-1008CX101KTG	100 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	65 @ 350 MHz	900	0.150	650
PE-1008CX121KTG	120 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	60 @ 350 MHz	825	0.220	650
PE-1008CX151KTG	150 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	625	0.160	580
PE-1008CX181KTG	180 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	650	0.250	620
PE-1008CX221KTG	220 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	625	0.240	500
PE-1008CX271KTG	270 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	45 @ 100 MHz	525	0.500	500
PE-1008CX331KTG	330 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	500	0.800	450
PE-1008CX391KTG	390 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	475	0.750	425
PE-1008CX471KTG	470 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	450	0.700	350
PE-1008CX561KTG	560 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	50 @ 100 MHz	425	0.800	350
PE-1008CX621KTG	620 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	45 @ 100 MHz	375	1.900	200
PE-1008CX681KTG	680 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	45 @ 100 MHz	375	2.300	200
PE-1008CX751KTG	750 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	45 @ 100 MHz	350	1.600	200
PE-1008CX821KTG	820 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 100 MHz	325	3.300	200
PE-1008CX911KTG	910 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 50 MHz	300	2.100	200
PE-1008CX102KTG	1000 @ 25 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 50 MHz	300	1.700	200
PE-1008CX122KTG	1200 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 50 MHz	250	3.000	200
PE-1008CX152KTG	1500 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 50 MHz	200	3.800	150
PE-1008CX182KTG	1800 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	40 @ 50 MHz	150	4.000	150
PE-1008CX222KTG	2200 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	30 @ 25 MHz	80	4.400	150
PE-1008CX272KTG	2700 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	30 @ 25 MHz	90	7.000	150
PE-1008CX332KTG	3300 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	25 @ 15 MHz	40	7.800	150
PE-1008CX392KTG	3900 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	20 @ 15 MHz	35	8.300	135
PE-1008CX472KTG	4700 @ 10 MHz	±10% (K)	±5%, ±2%, ±1%	16 @ 15 MHz	25	6.000	150

#### Notes:


1. Inductance measured using a HP4191A RF Impedance Analyzer.
2. Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
3. SRF measured using a HP8753C Network Analyzer.
4. R<sub>DC</sub> measured using a Valhalla Scientific model 4100 ATC Digital Ohmmeter.
5. Based on a 15°C maximum temperature rise.
6. Sample Kit Part Number: PE-1008CXXKIT-G
7. Component Weight: 0.032 grams typical.
8. S-Parameters and Q & inductance vs. frequency information available on 3.5" disk. Please request AN944-1.

# 1008CX MINIATURE RF CHIP INDUCTORS




Designed for Wireless Products

## Mechanical

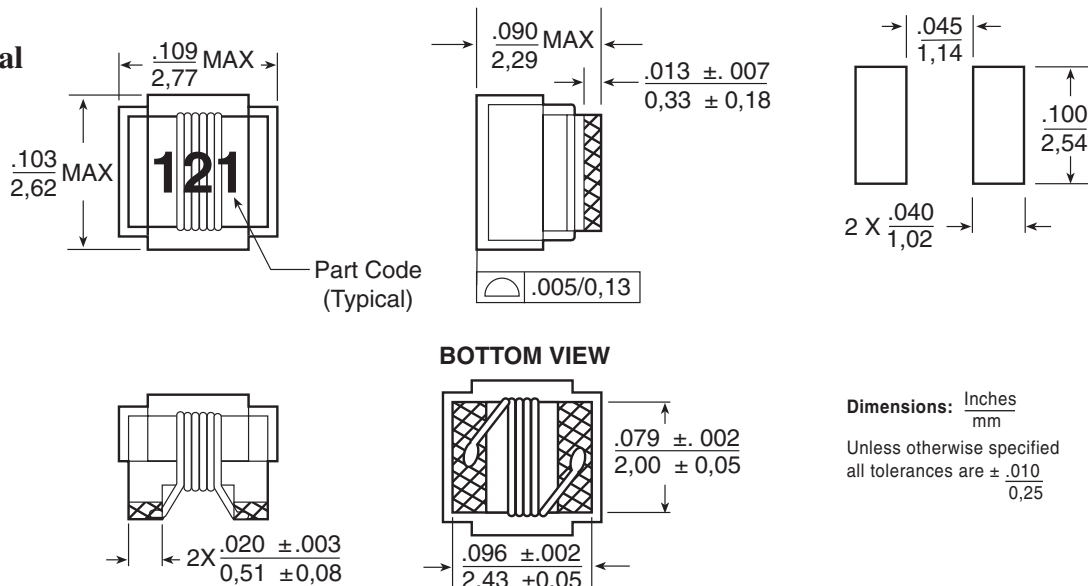


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified  
all tolerances are  $\pm \frac{.010}{0.25}$

## Typical Q vs Frequency

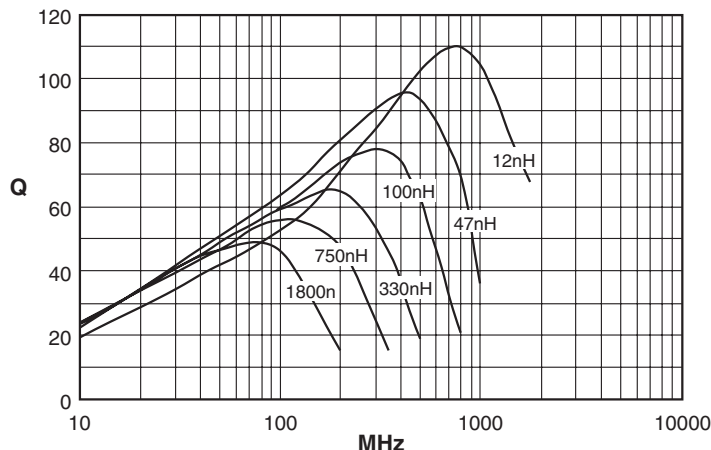

## Part Number Legend

**EXAMPLE:** 1008 Size, Ceramic Core, Standard Height, 120 nH, 10% Tolerance, Tape & Reel, Gold Termination

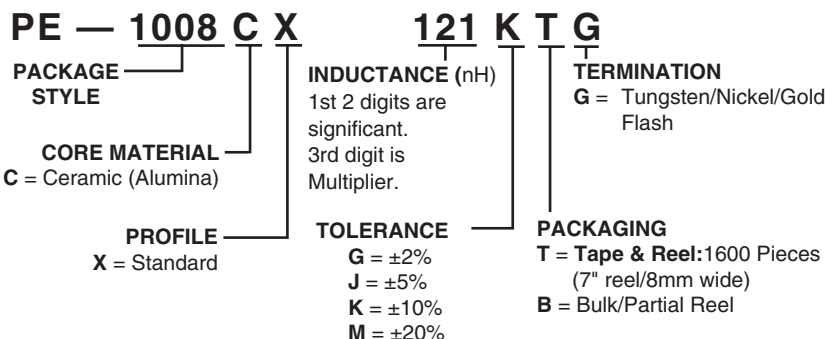

## For More Information :

### UNITED STATES (Worldwide)

12220 World Trade Drive  
San Diego, CA 92128  
The Americas  
<http://www.pulseeng.com>  
TEL: 858 674 8100  
FAX: 858 674 8262

### UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road  
The Surrey Research Park  
Guildford, Surrey GU2 5RE  
United Kingdom  
TEL: 44 1483 401700  
FAX: 44 1483 401701

### FRANCE (Southern Europe)

Zone Industrielle  
F-39270  
Orgelet  
France  
TEL: 33 3 84 35 04 04  
FAX: 33 3 84 25 46 41

### SINGAPORE (Southern Asia)

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324  
TEL: 65 287 8998  
FAX: 65 280 0080

### TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1  
HsinTai Wu Road  
Hsi-Chih, Taipei Hsien  
Taiwan, R.O.C.  
Tel: 886 2 2698 0228  
FAX: 886 2 2698 0948

### DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.