# FAIRCHILD

SEMICONDUCTOR

## P1087

### **P-Channel Switch**

- This device is designed for low level analog switching sample and hold circuits and chopper stabilized amplifiers.
- Sourced from process 88.



## Absolute Maximum Ratings ${\rm T_{C}=25^{\circ}C}$ unless otherwise noted

Symbol	Parameter	Parameter Value	
V <sub>DG</sub>	Drain-Gate Voltage	- 30	V
V <sub>GS</sub>	Gate-Source Voltage	30	V
I <sub>GF</sub>	Forward Gate Current	50	mA
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Temperature Range	-55 ~ +150	°C

\* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

#### NOTES:

These ratings are based on a maximum junction temperature of 150 degrees C.
 These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.


### Electrical Characteristics T<sub>C</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition		Min.	Тур.	Max.	Units
BV <sub>GSS</sub>	Gate-Source Breakdown Voltage	V <sub>DS</sub> = 0V, IG :	$V_{DS} = 0V, IG = 1\mu A$				V
I <sub>GSS</sub>	Gate Reverse Current	V <sub>GS</sub> = 15V	V <sub>GS</sub> = 15V			2	nA
I <sub>D</sub> (off)	Drain Cutoff Leakage Current	V <sub>DS</sub> = 15V	V <sub>DS</sub> = 15V			10	nA
		$V_{GS} = 7V$	T = +85°C			0.5	μΑ
I <sub>DGO</sub>	Drain-Gate Leakage Current	V <sub>DG</sub> = 15V				2	nA
		I <sub>S</sub> = 0	T = +85°C			0.1	μA
I <sub>DSS</sub>	Zero-Gate Voltage Drain Current	V <sub>DS</sub> = 20V, V <sub>0</sub>	$V_{DS} = 20V, V_{GS} = 0V$				mA
V <sub>GS</sub> (off)	Gate-Source Cutoff Voltage	$V_{DS} = 15V, I_{D} = 1\mu A$				5	V
V <sub>DS</sub> (on)	Drain-Source On Voltage	$V_{GS} = 0V, I_D =$	$V_{GS} = 0V, I_D = 3mA$			0.5	V
r <sub>DS</sub> (on)	Drain-Source On Resistance	$V_{GS} = 0V, I_D =$	$V_{GS} = 0V, I_D = 1mA$			150	Ω
r <sub>ds</sub> (on)	Drain-Source On Resistance	$V_{GS} = 0V, I_D =$	$V_{GS} = 0V, I_D = 0, f = 1kHz$			150	Ω
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 15V, V <sub>0</sub>	V <sub>DS</sub> = 15V, V <sub>GS</sub> = 0V, f = 1MHz			45	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	$V_{DS} = 0V, V_{GS}$	$V_{DS} = 0V, V_{GS} = 7V, f = 1MHz$			10	pF
t <sub>d</sub> (on)	Trun On Time	$V_{DD} = -6V$				15	ns
t <sub>r</sub>	Rise Time	$V_{GS}(off) = +7$	V			75	ns
t <sub>d</sub> (off)	Trun Off Time	-	$R_{L} = 1.8k\Omega$			25	ns
t <sub>f</sub>	Fall Time	– I <sub>D</sub> (on) = -3mA				100	ns

## Thermal Characteristics $T_A=25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Max.	Units
PD	Total Device Dissipation	350	mW
	Derate above 25°C	2.8	mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	125	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	357	°C/W
	· · · · · · · · · · · · · · · · · · ·		

©2002 Fairchild Semiconductor Corporation

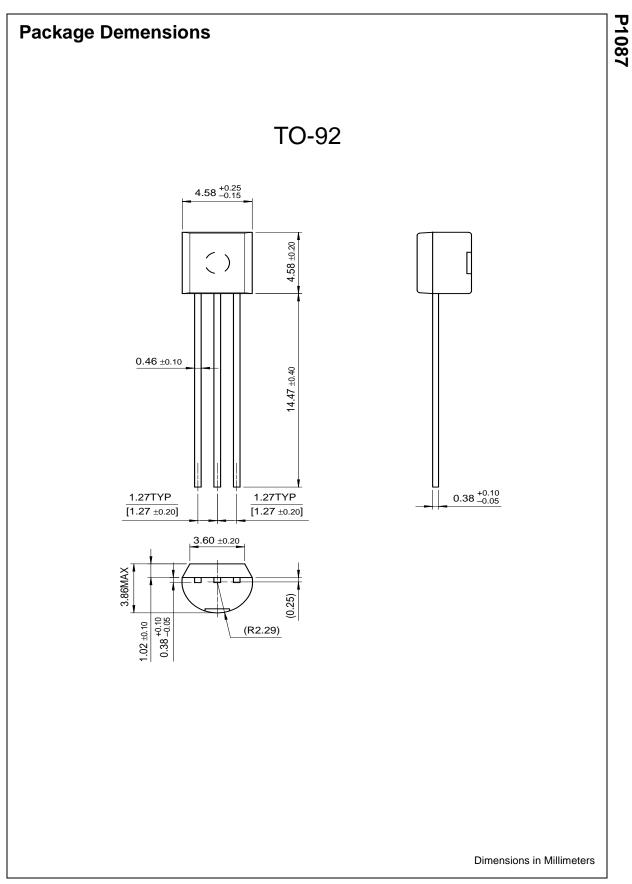

©2002 Fairchild Semiconductor Corporation

#### TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx<sup>TM</sup> Bottomless<sup>TM</sup> CoolFET<sup>TM</sup>  $CROSSVOLT^{TM}$ DenseTrench<sup>TM</sup> DOME<sup>TM</sup> EcoSPARK<sup>TM</sup>  $E^2$ CMOS<sup>TM</sup> EnSigna<sup>TM</sup> FACT<sup>TM</sup> FACT Quiet Series<sup>TM</sup> FAST<sup>®</sup> FASTr<sup>™</sup> FRFET<sup>™</sup> GlobalOptoisolator<sup>™</sup> GTO<sup>™</sup> HiSeC<sup>™</sup> ISOPLANAR<sup>™</sup> LittleFET<sup>™</sup> MicroFET<sup>™</sup> MicroPak<sup>™</sup> MICROWIRE<sup>™</sup> OPTOLOGIC<sup>™</sup> OPTOPLANAR<sup>™</sup> PACMAN<sup>™</sup> POP<sup>™</sup> Power247<sup>™</sup> PowerTrench<sup>®</sup> QFET<sup>™</sup> QS<sup>™</sup> QT Optoelectronics<sup>™</sup> Quiet Series<sup>™</sup> SLIENT SWITCHER<sup>®</sup> SMART STARTTMVCXTMSTAR\*POWERTMStealthTMSuperSOTTM-3SuperSOTTM-6SuperSOTTM-6SyncFETTMTruTranslationTMTinyLogicTMUHCTMUHCTMUltraFET®

STAR\*POWER is used under license

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition		
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.		
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.		

Fairchild Semiconductor		sSEARCH   <u>Parametric</u>   <u>Cross Reference</u>			
		space Produ	ct Folders and Annlica		
find products	Home >> Find products >>				
Products groups	P1087 P-Channel Switch		Related Links		
Analog and Mixed Signal Discrete Interface	Contents Features   Product status/pricing/packaging	Datasheet Download this datasheet	Request samples           Detted line           How to order products           Detted line           Product Change Notices		
Logic Microcontrollers Non-Volatile Memory	Features	PDF e-mail this datasheet	(PCNs) Dotted line Support		
<u>Optoelectronics</u> <u>Markets and</u>	P-Channel Switch	[E-	Distributor and field sales representatives		
applications New products Product selection and parametric search Cross-reference search	<ul> <li>This device is designed for low level analog switching sample and hold circuits and chopper stabilized amplifiers.</li> <li>Sourced from process 88.</li> </ul>	This page <u>Print version</u>	Dotted line Quality and reliability Dotted line Design tools		

## technical information

buy products

technical support

my Fairchild

company

## Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Package marking	Packing method
P1087	Full Production	\$0.185	TO-92	3	\$Y&3 P1087	BULK
P108718	Full Production	\$0.185	TO-92	3	\$Y&3 P1087	BULK

\* 1,000 piece Budgetary Pricing

## back to top

back to top

<u>Home</u> | <u>Find products</u> | <u>Technical information</u> | <u>Buy products</u> | <u>Support</u> | <u>Company</u> | <u>Contact us</u> | <u>Site index</u> | <u>Privacy policy</u>

© Copyright 2002 Fairchild Semiconductor