


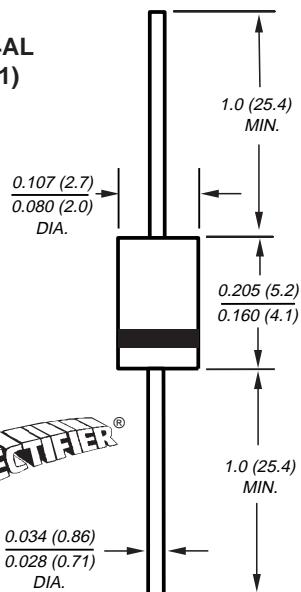

Glass Passivated Junction Rectifier

**DO-204AL
(DO-41)**

SUPERRECTIFIER®

 NOTE: Lead diameter is $\frac{0.026 \text{ (0.66)}}{0.023 \text{ (0.58)}}$ for suffix "E" part numbers

Dimensions in inches and (millimeters)

*Glass-plastic encapsulation technique is covered by Patent No. 3,996,602, and brazed-lead assembly by Patent No. 3,930,306

 Reverse Voltage
 50 to 1000V
 Forward Current 1.0A

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0 Ampere operation at $T_A = 75^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AL, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 oz., 0.3 g

Maximum Ratings & Thermal Characteristics

 Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	1N 4001GP	1N 4002GP	1N 4003GP	1N 4004GP	1N 4005GP	1N 4006GP	1N 4007GP	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
* Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
* Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 75^\circ\text{C}$	I _{F(AV)}					1.0			A
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}				30				A
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length $T_A = 75^\circ\text{C}$	I _{R(AV)}			30					μA
Typical thermal resistance (Note 1)	R _{θJA} R _{θJL}			55					$^\circ\text{C/W}$
* Operating junction and storage temperature range	T _J , T _{TSG}			-65 to +175					$^\circ\text{C}$

Electrical Characteristics

 Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 1.0A	V _F	1.1		V
* Maximum DC reverse current at rated DC blocking voltage	T _A = 25°C T _A = 125°C	I _R	5.0 50	μA
Typical reverse recovery time at I _F = 0.5A, I _R = 1.0A, I _{rr} = 0.25A	t _{rr}	2.0		μs
Typical junction capacitance at 4.0V, 1MHz	C _J	8.0		pF

Notes: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted *JEDEC registered values

1N4001GP thru 1N4007GP

Vishay Semiconductors
formerly General Semiconductor



Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

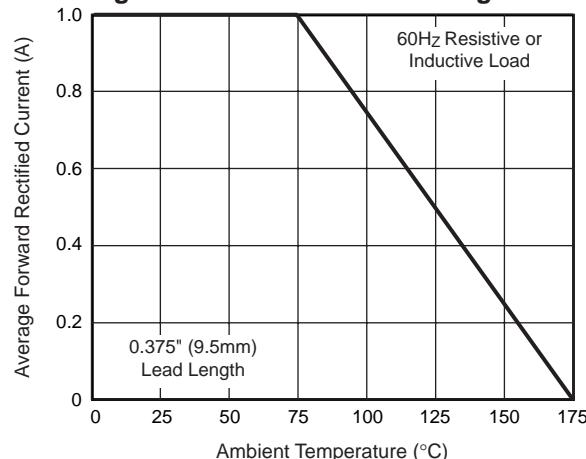


Fig. 3 – Typical Instantaneous Forward Characteristics

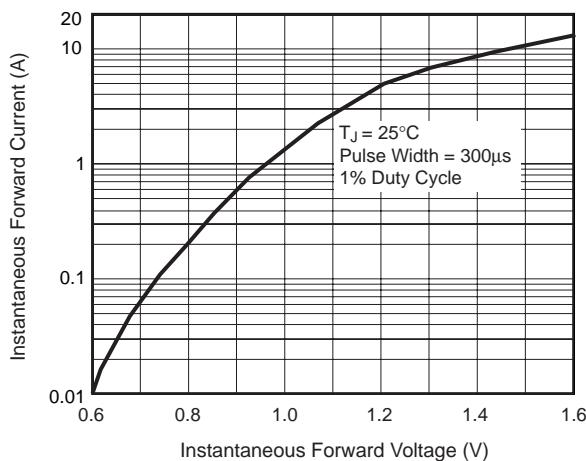


Fig. 5 – Typical Junction Capacitance

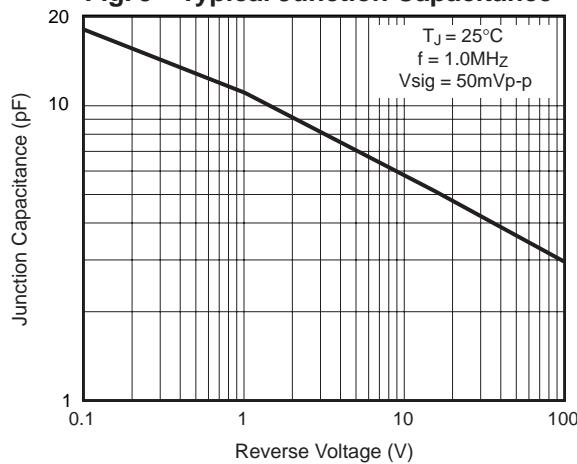


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

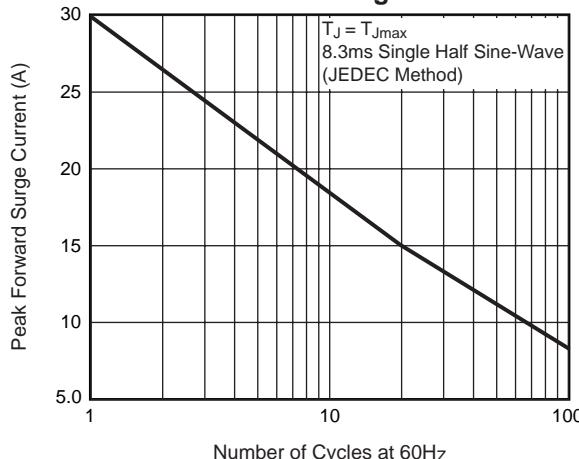


Fig. 4 – Typical Reverse Characteristics


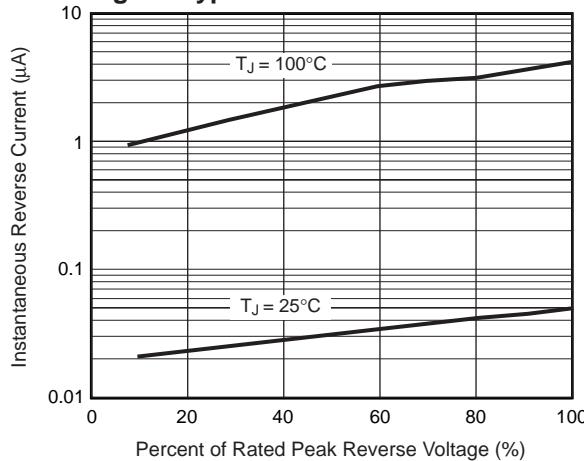


Fig. 6 – Typical Transient Thermal Impedance

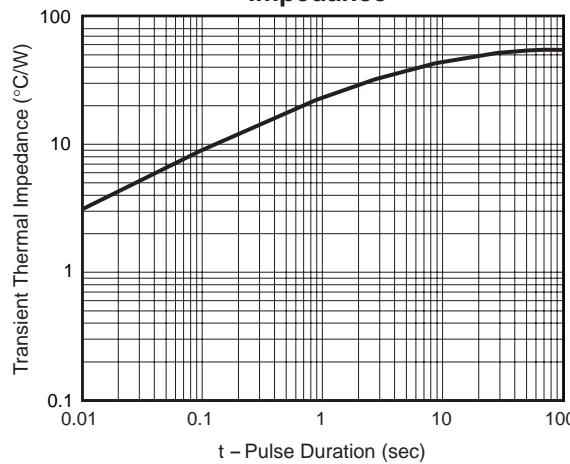

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.