



CY7C09089V/99V
CY7C09179V/99V

3.3 V 32 K/64 K/128 K × 8/9 Synchronous Dual-Port Static RAM


Features

- True Dual-Ported memory cells which enable simultaneous access of the same memory location
- Flow-through and Pipelined devices
- 32 K × 9 organizations (CY7C09179V)
- 64 K × 8 organizations (CY7C09089V)
- 128 K × 8/9 organizations (CY7C09099V/199V)
- 3 Modes
- Flow-through
- Pipelined
- Burst
- Pipelined output mode on both ports enables fast 100 MHz operation
- 0.35-micron CMOS for optimum speed and power
- High speed clock to data access 6.5^[1]/7.5^[1]/9/12 ns (max.)
- 3.3 V low operating power
- Active = 115 mA (typical)
- Standby = 10 μA (typical)
- Fully synchronous interface for easier operation
- Burst counters increment addresses internally
- Shorten cycle times
- Minimize bus noise
- Supported in Flow-through and Pipelined modes
- Dual Chip Enables for easy depth expansion
- Automatic power down
- Commercial and Industrial temperature ranges
- Available in 100-pin TQFP
- Pb-free packages available

Note

1. See [page 9](#) and [page 10](#) for Load Conditions.

Logic Block Diagram

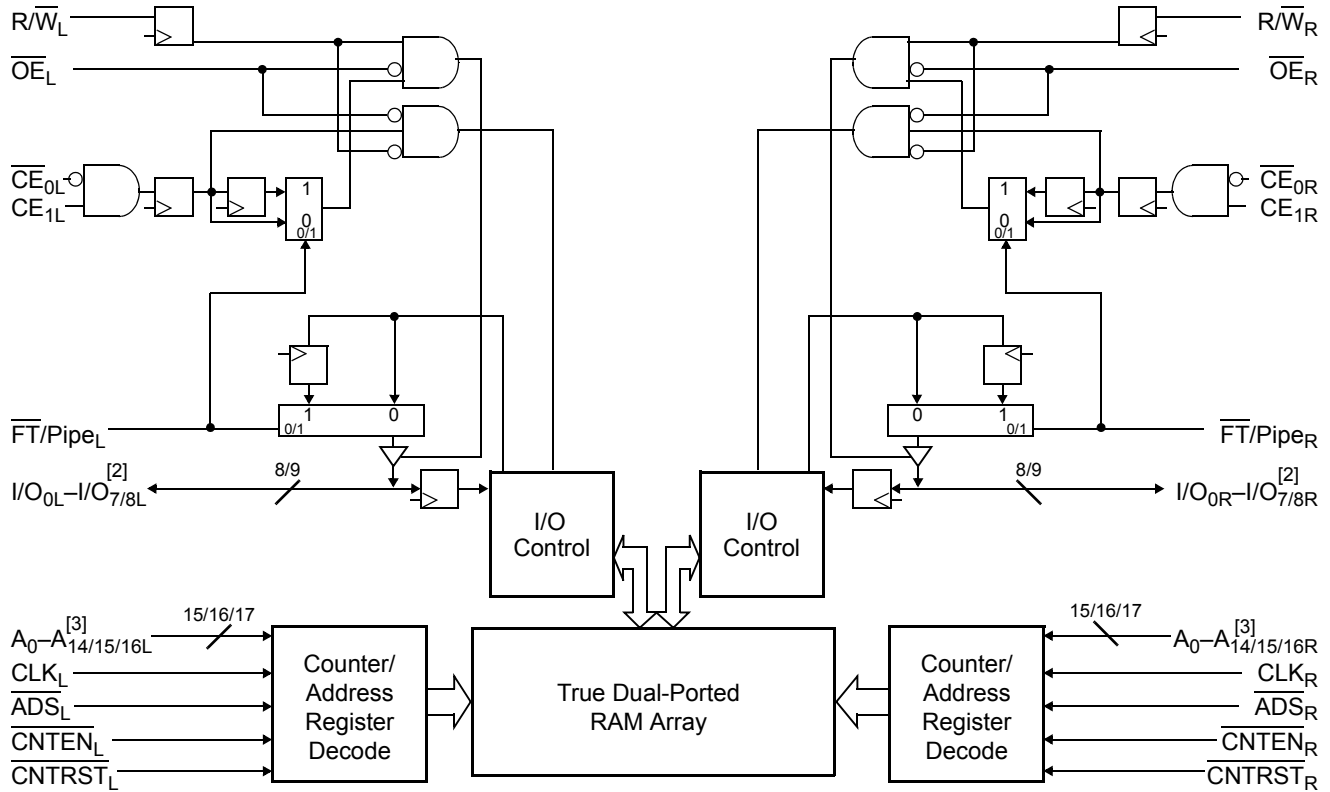

Notes

- 2. I/O₀-I/O₇ for ×8 devices, I/O₀-I/O₈ for ×9 devices.
- 3. A₀-A₁₄ for 32K, A₀-A₁₅ for 64K, and A₀-A₁₆ for 128K devices.

Functional Description

The CY7C09089V/99V and CY7C09179V/99V are high speed synchronous CMOS 64 K/128 K × 8 and 32 K/128 K × 9 dual-port static RAMs. Two ports are provided, permitting independent, simultaneous access for reads and writes to any location in memory.^[4] Registers on control, address, and data lines enable minimal setup and hold times. In pipelined output mode, data is registered for decreased cycle time. Clock to data valid $t_{CD2} = 6.5 \text{ ns}$ ^[5] (pipelined). Flow-through mode can also be used to bypass the pipelined output register to eliminate access latency. In flow-through mode, data is available $t_{CD1} = 18 \text{ ns}$ after the address is clocked into the device. Pipelined output or flow-through mode is selected via the $\overline{FT/Pipe}$ pin.

Each port contains a burst counter on the input address register. The internal write pulse width is independent of the LOW-to-HIGH transition of the clock signal. The internal write pulse is self-timed to enable the shortest possible cycle times.

A HIGH on $\overline{CE_0}$ or LOW on CE_1 for one clock cycle powers down the internal circuitry to reduce the static power consumption. The use of multiple Chip Enables enables easier banking of multiple chips for depth expansion configurations. In the pipelined mode, one cycle is required with $\overline{CE_0}$ LOW and CE_1 HIGH to reactivate the outputs.

Counter enable inputs are provided to stall the operation of the address input and use the internal address generated by the internal counter for fast interleaved memory applications. A port's burst counter is loaded with the port's Address Strobe (ADS). When the port's Count Enable (CNTEN) is asserted, the address counter increments on each LOW-to-HIGH transition of that port's clock signal. This reads/writes one word from/into each successive address location until CNTEN is deasserted. The counter can address the entire memory array and loops back to the start. Counter Reset (CNTRST) is used to reset the burst counter.

All parts are available in 100-pin Thin Quad Plastic Flatpack (TQFP) packages.

Notes


4. When writing simultaneously to the same location, the final value cannot be guaranteed.
5. See [page 9](#) and [page 10](#) for Load Conditions.

Contents

| | | | |
|--------------------------------------------------|-----------|------------------------------------------------------|-----------|
| Pin Configurations | 5 | 32 K × 9 3.3 V Synchronous Dual-Port SRAM | 24 |
| Selection Guide | 7 | 128 K × 9 3.3 V Synchronous Dual-Port SRAM | 24 |
| Pin Definitions | 7 | Ordering Code Definitions | 24 |
| Maximum Ratings | 8 | Package Diagram | 25 |
| Operating Range | 8 | Acronyms | 26 |
| Electrical Characteristics | 8 | Document Conventions | 26 |
| Capacitance | 9 | Units of Measure | 26 |
| Switching Characteristics | 11 | Document History Page | 27 |
| Switching Waveforms | 12 | Sales, Solutions, and Legal Information | 28 |
| Read/Write and Enable Operation | 23 | Worldwide Sales and Design Support | 28 |
| Address Counter Control Operation | 23 | Products | 28 |
| Ordering Information | 24 | PSoC Solutions | 28 |
| 64 K × 8 3.3 V Synchronous Dual-Port SRAM | 24 | | |
| 128 K × 8 3.3 V Synchronous Dual-Port SRAM | 24 | | |

Pin Configurations


Figure 1. 100-pin TQFP (Top View) - CY7C09089V (64 K × 8), CY7C09099V (128 K × 8)

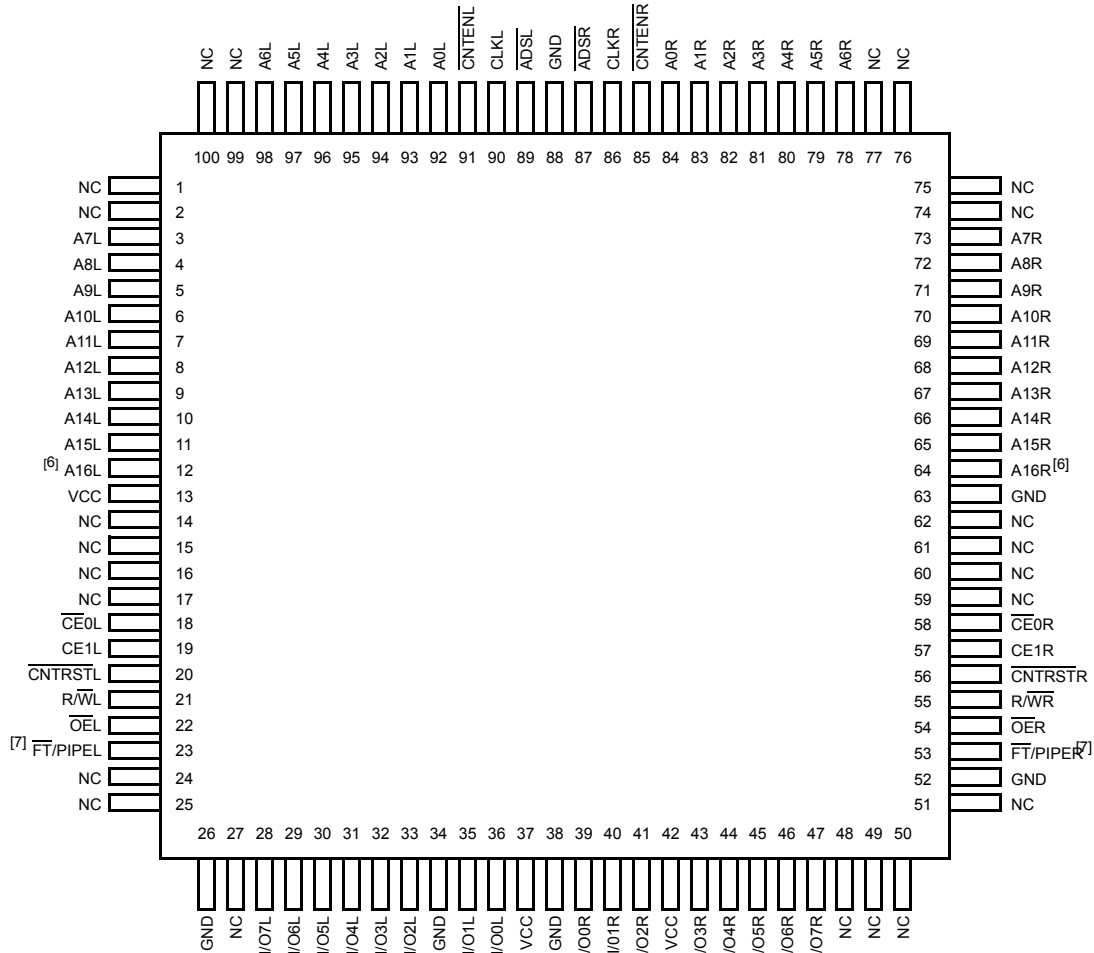

Notes

- 6. This pin is NC for CY7C09089V.
- 7. For CY7C09089V, pin #23 connected to V_{CC} is pin compatible with an IDT 5 V, ×8 pipelined device; connecting pin #23 and #53 to GND is pin compatible with an IDT 5 V, ×16 flow-through device.

Figure 2. 100-pin TQFP (Top View) - CY7C09179V (32 K × 9), CY7C09199V (128 K × 9)

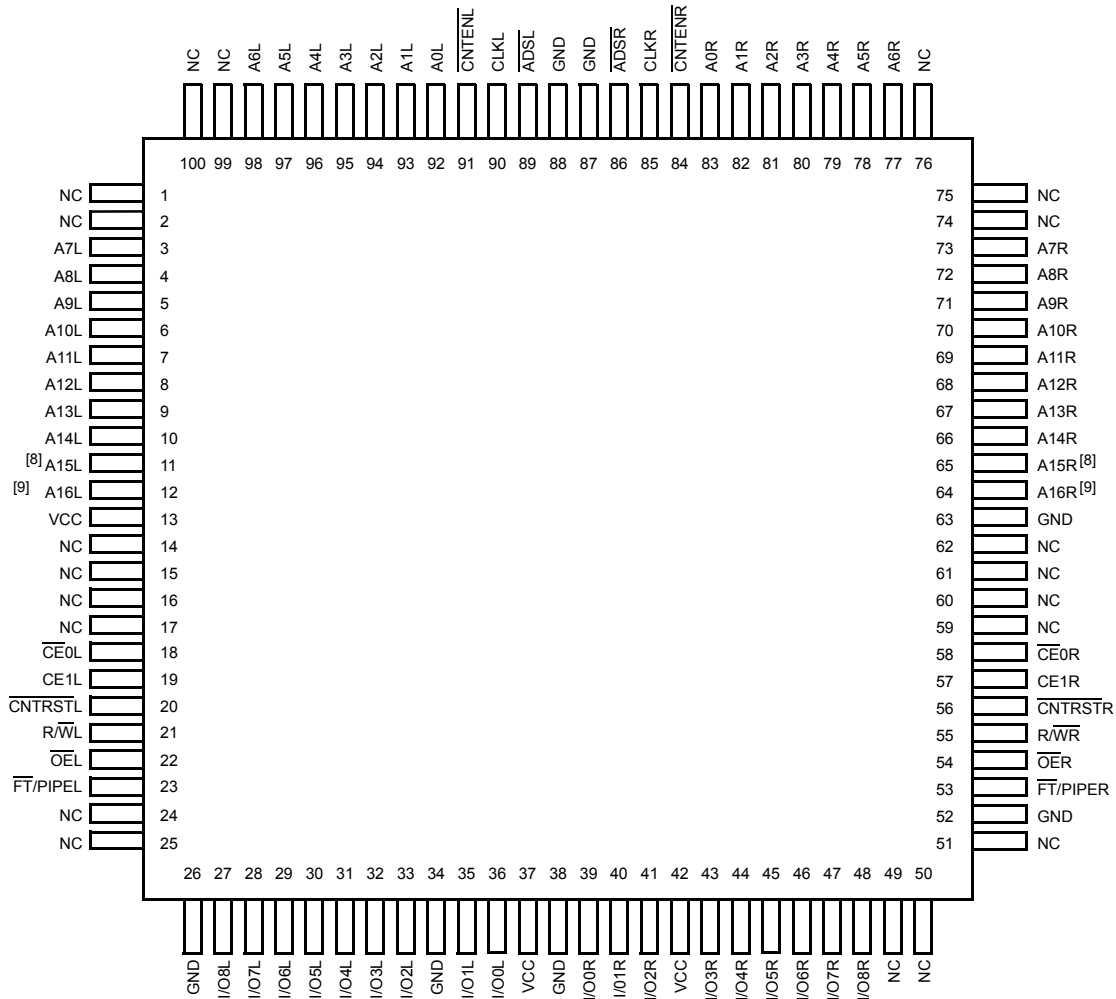

Notes

- 8. This pin is NC for CY7C09179V.
- 9. This pin is NC for CY7C09179V and CY7C09189V.

Selection Guide

| Description | CY7C09179V -6 ^[10] | CY7C09099V -7 ^[10] | CY7C09199V -9 | CY7C09089V/99V CY7C09179V -12 |
|---------------------------------------------------------------------------|----------------------------------|----------------------------------|------------------|-------------------------------------|
| f _{MAX2} (MHz) (Pipelined) | 100 | 83 | 67 | 50 |
| Max. Access Time (ns) (Clock to Data, Pipelined) | 6.5 | 7.5 | 9 | 12 |
| Typical Operating Current I _{CC} (mA) | 175 | 155 | 135 | 115 |
| Typical Standby Current for I _{SB1} (mA) (Both Ports TTL Level) | 25 | 25 | 20 | 20 |
| Typical Standby Current for I _{SB3} (μA) (Both Ports CMOS Level) | 10 | 10 | 10 | 10 |

Pin Definitions

| Left Port | Right Port | Description |
|-----------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A _{0L} -A _{16L} | A _{0R} -A _{16R} | Address Inputs (A ₀ -A ₁₄ for 32K; A ₀ -A ₁₅ for 64K; and A ₀ -A ₁₆ for 128K devices). |
| ADS _L | ADS _R | Address Strobe Input. Used as an address qualifier. This signal should be asserted LOW to access the part using an externally supplied address. Asserting this signal LOW also loads the burst counter with the address present on the address pins. |
| \overline{CE}_{0L} , CE _{1L} | \overline{CE}_{0R} , CE _{1R} | Chip Enable Input. To select either the left or right port, both \overline{CE}_0 AND CE ₁ must be asserted to their active states ($\overline{CE}_0 \leq V_{IL}$ and CE ₁ ≥ V _{IH}). |
| CLK _L | CLK _R | Clock Signal. This input can be free running or strobed. Maximum clock input rate is f _{MAX} . |
| CNTEN _L | CNTEN _R | Counter Enable Input. Asserting this signal LOW increments the burst address counter of its respective port on each rising edge of CLK. CNTEN is disabled if ADS or CNTRST are asserted LOW. |
| CNTRST _L | CNTRST _R | Counter Reset Input. Asserting this signal LOW resets the burst address counter of its respective port to zero. CNTRST is not disabled by asserting ADS or CNTEN. |
| I/O _{0L} -I/O _{8L} | I/O _{0R} -I/O _{8R} | Data Bus Input/Output (I/O ₀ -I/O ₇ for ×8 devices; I/O ₀ -I/O ₈ for ×9 devices). |
| \overline{OE}_L | \overline{OE}_R | Output Enable Input. This signal must be asserted LOW to enable the I/O data pins during read operations. |
| R \overline{W}_L | R \overline{W}_R | Read/Write Enable Input. This signal is asserted LOW to write to the dual port memory array. For read operations, assert this pin HIGH. |
| $\overline{FT}/PIPE_L$ | $\overline{FT}/PIPE_R$ | Flow-Through/Pipelined Select Input. For flow-through mode operation, assert this pin LOW. For pipelined mode operation, assert this pin HIGH. |
| GND | | Ground Input. |
| NC | | No Connect. |
| V _{CC} | | Power Input. |

Note

10. See [page 9](#) and [page 10](#) for Load Conditions.

Maximum Ratings

Exceeding maximum ratings may impair the useful life of the device. These user guidelines are not tested.^[11]

| | |
|-----------------------------------------------------|-----------------------------------|
| Storage Temperature | -65 °C to +150 °C |
| Ambient Temperature with Power Applied | -55 °C to +125 °C |
| Supply Voltage to Ground Potential | -0.5 V to +4.6 V |
| DC Voltage Applied to Outputs in High Z State | -0.5 V to V _{CC} + 0.5 V |
| DC Input Voltage | -0.5 V to V _{CC} + 0.5 V |

| | |
|-----------------------------------------|----------|
| Output Current into Outputs (LOW) | 20 mA |
| Static Discharge Voltage | > 2001 V |
| Latch-Up Current | > 200 mA |

Operating Range

| Range | Ambient Temperature | V _{CC} |
|----------------------------|---------------------|-----------------|
| Commercial | 0 °C to +70 °C | 3.3 V ± 300 mV |
| Industrial ^[12] | -40 °C to +85 °C | 3.3 V ± 300 mV |

Electrical Characteristics

Over the Operating Range

| Parameter | Description | CY7C09079V/89V/99V CY7C09179V/89V/99V | | | | | | | | | | | | Unit | |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----|-----|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|------|----|
| | | -6 ^[13] | | | -7 ^[13] | | | -9 | | | -12 | | | | |
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | | |
| V _{OH} | Output HIGH Voltage (V _{CC} = Min., I _{OH} = -4.0 mA) | 2.4 | - | - | 2.4 | - | - | 2.4 | - | - | 2.4 | - | - | V | |
| V _{OL} | Output LOW Voltage (V _{CC} = Min., I _{OH} = +4.0 mA) | - | - | 0.4 | - | - | 0.4 | - | - | 0.4 | - | - | 0.4 | V | |
| V _{IH} | Input HIGH Voltage | 2.0 | - | - | 2.0 | - | - | 2.0 | - | - | 2.0 | - | - | V | |
| V _{IL} | Input LOW Voltage | - | - | 0.8 | - | - | 0.8 | - | - | 0.8 | - | - | 0.8 | V | |
| I _{OZ} | Output Leakage Current | -10 | - | 10 | -10 | - | 10 | -10 | - | 10 | -10 | - | 10 | μA | |
| I _{CC} | Operating Current (V _{CC} = Max., I _{OUT} = 0 mA) Outputs Disabled | Commercial | - | 175 | 320 | - | 155 | 275 | - | 135 | 225 | - | 115 | 205 | mA |
| | | Industrial ^[12] | - | - | - | - | 275 | 390 | - | 185 | 295 | - | - | - | mA |
| I _{SB1} | Standby Current (Both Ports TTL Level) ^[14] CE _L & CE _R ≥ V _{IH} , f = f _{MAX} | Commercial | - | 25 | 95 | - | 25 | 85 | - | 20 | 65 | - | 20 | 50 | mA |
| | | Industrial ^[12] | - | - | - | - | 85 | 120 | - | 35 | 75 | - | - | - | mA |
| I _{SB2} | Standby Current (One Port TTL Level) ^[14] CE _L CE _R ≥ V _{IH} , f = f _{MAX} | Commercial | - | 115 | 175 | - | 105 | 165 | - | 95 | 150 | - | 85 | 140 | mA |
| | | Industrial ^[12] | - | - | - | - | 165 | 210 | - | 105 | 160 | - | - | - | mA |
| I _{SB3} | Standby Current (Both Ports CMOS Level) ^[14] CE _L & CE _R ≥ V _{CC} - 0.2 V, f = 0 | Commercial | - | 10 | 250 | - | 10 | 250 | - | 10 | 250 | - | 10 | 250 | μA |
| | | Industrial ^[12] | - | - | - | - | 10 | 250 | - | 10 | 250 | - | - | - | μA |
| I _{SB4} | Standby Current (One Port CMOS Level) ^[14] CE _L CE _R ≥ V _{IH} , f = f _{MAX} | Commercial | - | 105 | 135 | - | 95 | 125 | - | 85 | 115 | - | 75 | 100 | mA |
| | | Industrial ^[12] | - | - | - | - | 125 | 170 | - | 95 | 125 | - | - | - | mA |

Notes

11. The Voltage on any input or I/O pin cannot exceed the power pin during power-up.

12. Industrial parts are available in CY7C09099V and CY7C09199V only.

13. See page 9 and page 10 for Load Conditions.

14. CE_L and CE_R are internal signals. To select either the left or right port, both CE₀ AND CE₁ must be asserted to their active states (CE₀ ≤ V_{IL} and CE₁ ≥ V_{IH}).

Capacitance

| Parameter | Description | Test Conditions | Max | Unit |
|-----------|--------------------|---------------------------------------------------------------------------------|-----|------|
| C_{IN} | Input Capacitance | $T_A = 25\text{ }^\circ\text{C}$, $f = 1\text{ MHz}$, $V_{CC} = 3.3\text{ V}$ | 10 | pF |
| C_{OUT} | Output Capacitance | | 10 | pF |

Figure 3. AC Test Loads


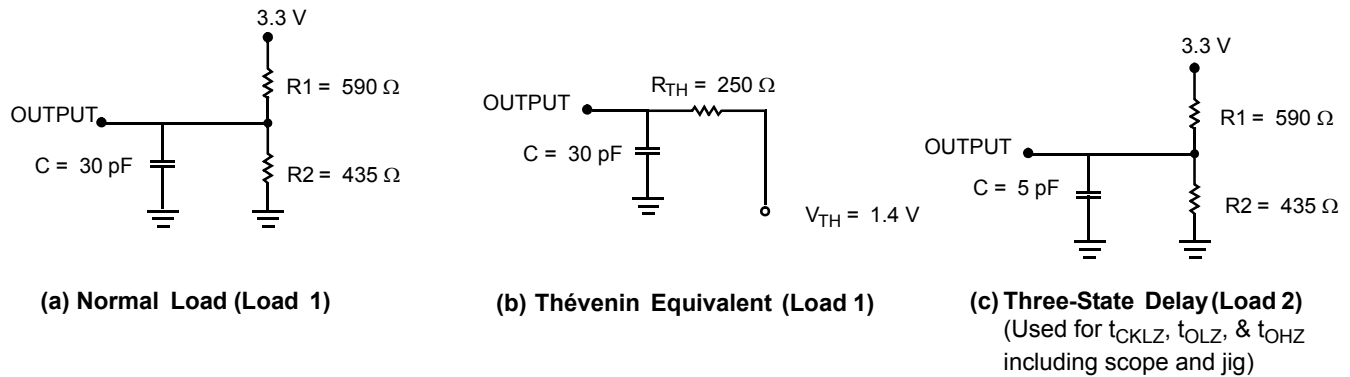



Figure 4. AC Test Loads (Applicable to -6 and -7 only)^[15]

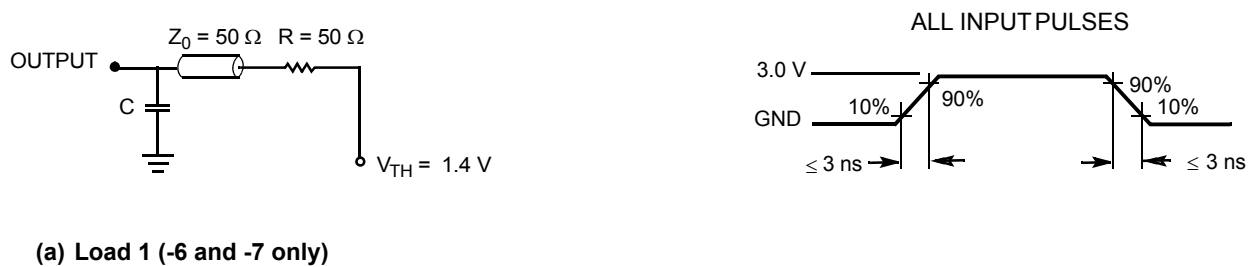

Note

15. Test Conditions: $C = 10\text{ pF}$.

Figure 5. Load Derating Curve

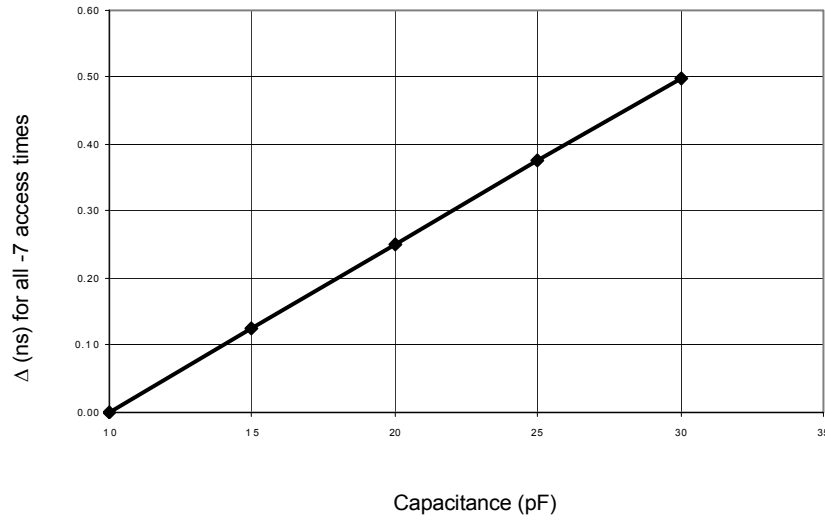

Switching Characteristics

Over the Operating Range

| Parameter | Description | CY7C09079V/89V/99V CY7C09179V/89V/99V | | | | | | | | Unit |
|---------------------------------------|------------------------------------|------------------------------------------|-----|--------------------|-----|-----|-----|-----|-----|------|
| | | -6 ^[16] | | -7 ^[16] | | -9 | | -12 | | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| f _{MAX1} | f _{Max} Flow-through | – | 53 | – | 45 | – | 40 | – | 33 | MHz |
| f _{MAX2} | f _{Max} Pipelined | – | 100 | – | 83 | – | 67 | – | 50 | MHz |
| t _{CYC1} | Clock Cycle Time - Flow-through | 19 | – | 22 | – | 25 | – | 30 | – | ns |
| t _{CYC2} | Clock Cycle Time - Pipelined | 10 | – | 12 | – | 15 | – | 20 | – | ns |
| t _{CH1} | Clock HIGH Time - Flow-through | 6.5 | – | 7.5 | – | 12 | – | 12 | – | ns |
| t _{CL1} | Clock LOW Time - Flow-through | 6.5 | – | 7.5 | – | 12 | – | 12 | – | ns |
| t _{CH2} | Clock HIGH Time - Pipelined | 4 | – | 5 | – | 6 | – | 8 | – | ns |
| t _{CL2} | Clock LOW Time - Pipelined | 4 | – | 5 | – | 6 | – | 8 | – | ns |
| t _R | Clock Rise Time | – | 3 | – | 3 | – | 3 | – | 3 | ns |
| t _F | Clock Fall Time | – | 3 | – | 3 | – | 3 | – | 3 | ns |
| t _{SA} | Address Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HA} | Address Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SC} | Chip Enable Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HC} | Chip Enable Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SW} | R/W Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HW} | R/W Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SD} | Input Data Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HD} | Input Data Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SAD} | ADS Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HAD} | ADS Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SCN} | CNTEN Set-Up Time | 3.5 | – | 4.5 | – | 5 | – | 5 | – | ns |
| t _{HCN} | CNTEN Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{SRST} | CNTRST Set-Up Time | 3.5 | – | 4 | – | 4 | – | 4 | – | ns |
| t _{HRST} | CNTRST Hold Time | 0 | – | 0 | – | 1 | – | 1 | – | ns |
| t _{OE} | Output Enable to Data Valid | – | 8 | – | 9 | – | 10 | – | 12 | ns |
| t _{OLZ} ^[17, 18] | OE to Low Z | 2 | – | 2 | – | 2 | – | 2 | – | ns |
| t _{OHZ} ^[17, 18] | OE to High Z | 1 | 7 | 1 | 7 | 1 | 7 | 1 | 7 | ns |
| t _{CD1} | Clock to Data Valid - Flow-through | – | 15 | – | 18 | – | 20 | – | 25 | ns |
| t _{CD2} | Clock to Data Valid - Pipelined | – | 6.5 | – | 7.5 | – | 9 | – | 12 | ns |
| t _{DC} | Data Output Hold After Clock HIGH | 2 | – | 2 | – | 2 | – | 2 | – | ns |
| t _{CKHZ} ^[17, 18] | Clock HIGH to Output High Z | 2 | 9 | 2 | 9 | 2 | 9 | 2 | 9 | ns |
| t _{CKLZ} ^[17, 18] | Clock HIGH to Output Low Z | 2 | – | 2 | – | 2 | – | 2 | – | ns |

Notes

16. See page 9 and page 10 for Load Conditions.

17. Test conditions used are Load 2.

18. This parameter is guaranteed by design, but it is not production tested.


Switching Characteristics (continued)

Over the Operating Range

| Parameter | Description | CY7C09079V/89V/99V CY7C09179V/89V/99V | | | | | | | | Unit |
|----------------------------|------------------------------------------|------------------------------------------|-----|--------------------|-----|-----|-----|-----|-----|------|
| | | -6 ^[16] | | -7 ^[16] | | -9 | | -12 | | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| Port to Port Delays | | | | | | | | | | |
| t _{CWDD} | Write Port Clock HIGH to Read Data Delay | – | 30 | – | 35 | – | 40 | – | 40 | ns |
| t _{CCS} | Clock to Clock Set-Up Time | – | 9 | – | 10 | – | 15 | – | 15 | ns |

Switching Waveforms

Figure 6. Read Cycle for Flow-through Output ($\overline{\text{FT/PIPE}} = V_{\text{IL}}$)^[19, 20, 21, 22]

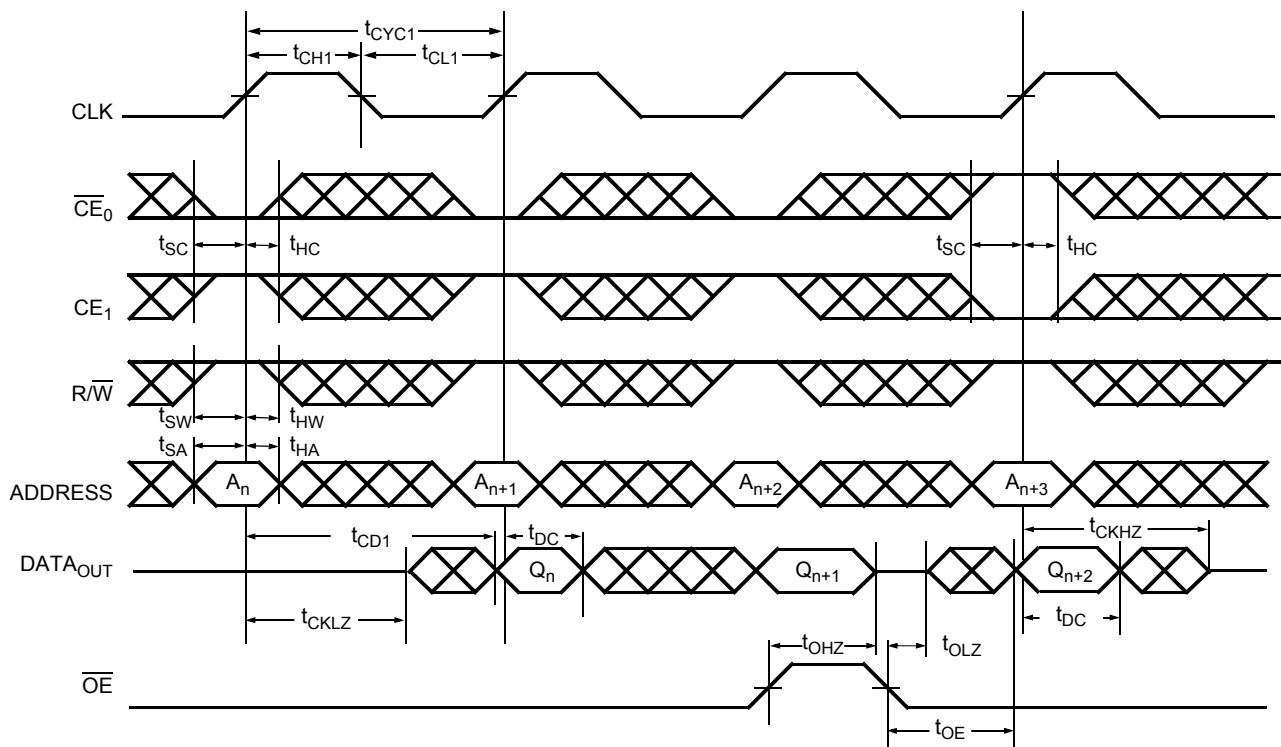


Notes

19. $\overline{\text{OE}}$ is asynchronously controlled; all other inputs are synchronous to the rising clock edge.
20. $\text{ADS} = V_{\text{IL}}$, CNTEN and $\text{CNRST} = V_{\text{IH}}$.
21. The output is disabled (high-impedance state) by $\overline{\text{CE}}_0 = V_{\text{IH}}$ or $\overline{\text{CE}}_1 = V_{\text{IL}}$ following the next rising edge of the clock.
22. Addresses do not have to be accessed sequentially since $\text{ADS} = V_{\text{IL}}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.

Switching Waveforms (continued)

Figure 7. Read Cycle for Pipelined Operation ($\overline{FT}/PIPE = V_{IH}$)^[23, 24, 25, 26]

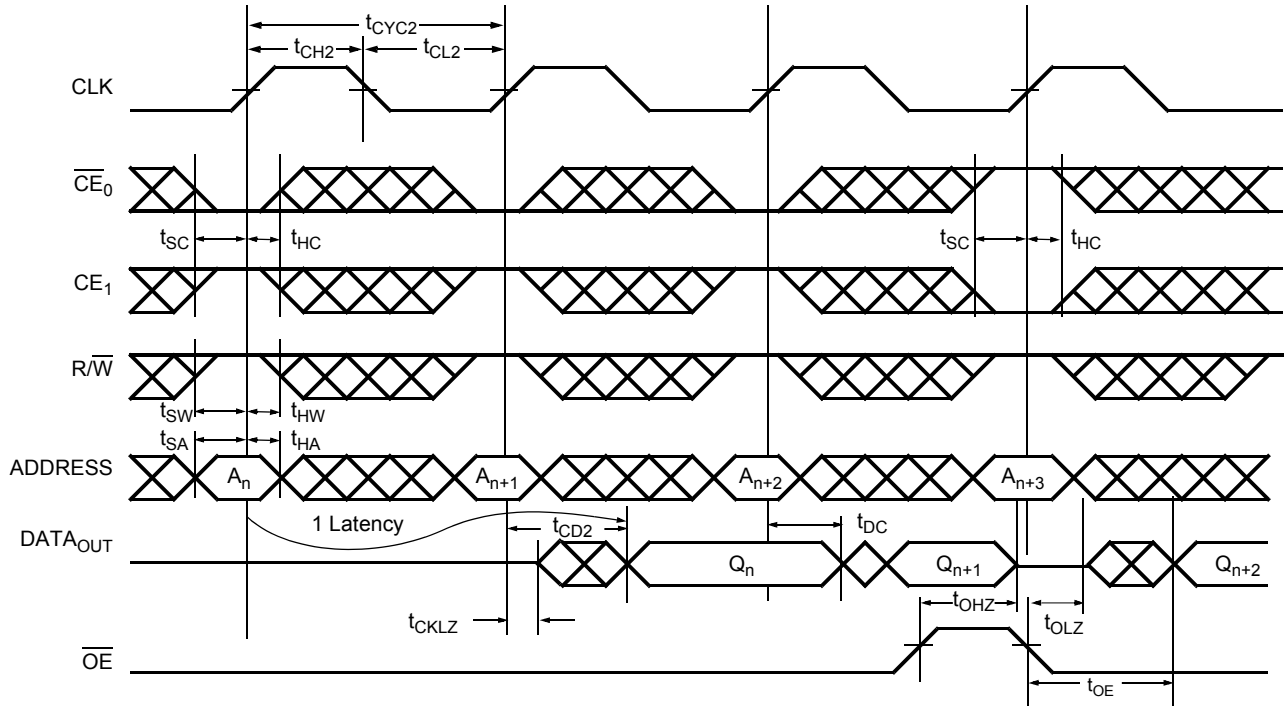


Notes

- 23. \overline{OE} is asynchronously controlled; all other inputs are synchronous to the rising clock edge.
- 24. $ADS = V_{IL}$, \overline{CNTEN} and $\overline{CNRST} = V_{IH}$.
- 25. The output is disabled (high-impedance state) by $\overline{CE}_0 = V_{IH}$ or $CE_1 = V_{IL}$ following the next rising edge of the clock.
- 26. Addresses do not have to be accessed sequentially since $ADS = V_{IL}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.

Switching Waveforms (continued)

Figure 8. Bank Select Pipelined Read^[27, 28]

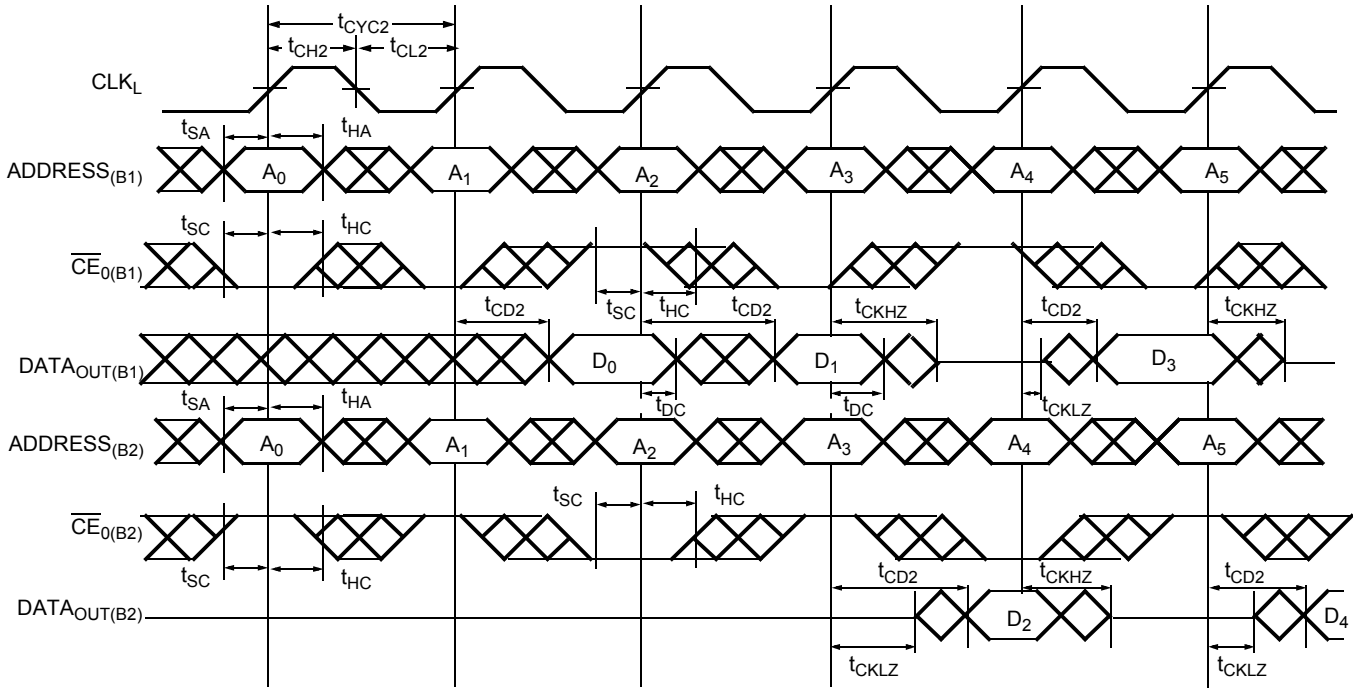

Notes


27. In this depth expansion example, B1 represents Bank #1 and B2 is Bank #2; Each Bank consists of one Cypress dual-port device from this datasheet.

ADDRESS_(B1) = ADDRESS_(B2).

28. OE and ADS = V_{IL}; CE_{1(B1)}, CE_{1(B2)}, R/W, CNTEN, and CNTRST = V_{IH}.

Switching Waveforms (continued)

Figure 9. Left Port Write to Flow-through Right Port Read^[29, 30, 31, 32]

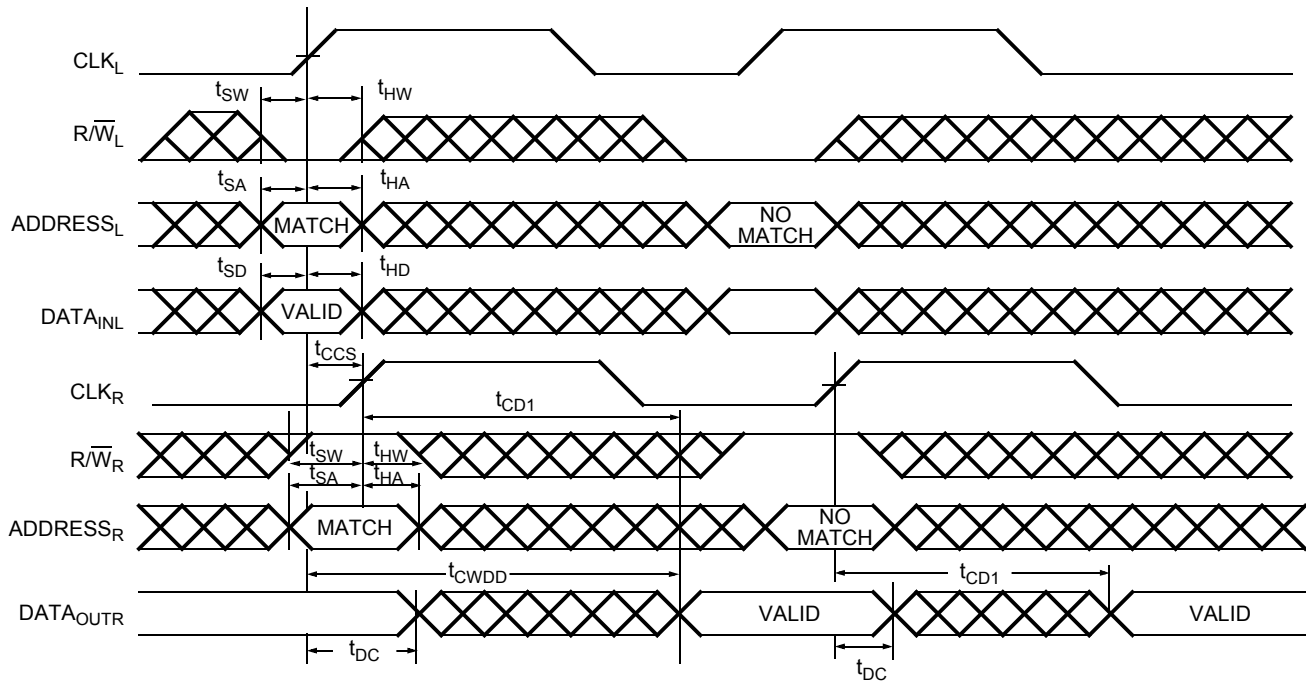

Notes

29. The same waveforms apply for a right port write to flow-through left port read.


30. \overline{CE}_0 and $\overline{ADS} = V_{IL}$; CE_1 , \overline{CNTEN} , and $\overline{CNRST} = V_{IH}$.

31. $\overline{OE} = V_{IL}$ for the right port, which is being read from. $\overline{OE} = V_{IH}$ for the left port, which is being written to.

32. If $t_{CCS} \leq$ maximum specified, then data from right port READ is not valid until the maximum specified for t_{CWDD} . If $t_{CCS} >$ maximum specified, then data is not valid until $t_{CCS} + t_{CD1}$. t_{CWDD} does not apply in this case.

Switching Waveforms (continued)

Figure 10. Pipelined Read-to-Write-to-Read ($\overline{OE} = V_{IL}$)^[33, 34, 35, 36]

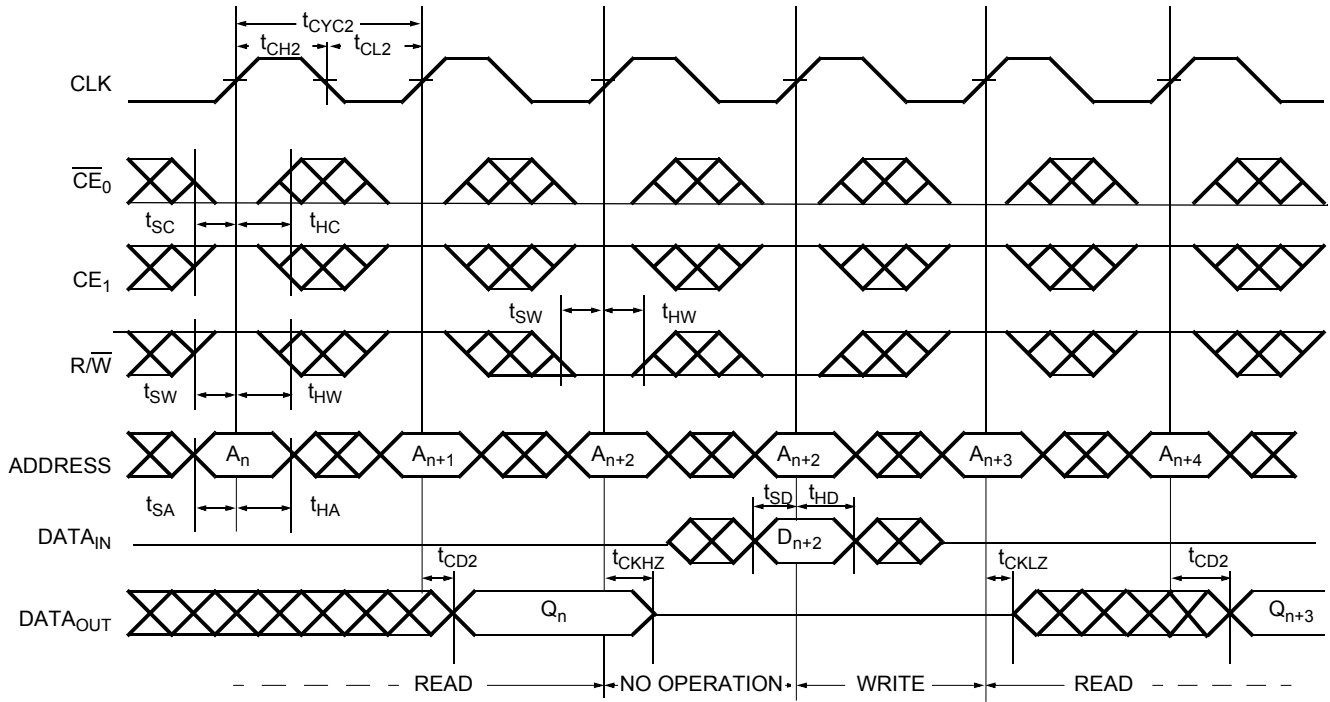


Notes

- 33. Addresses do not have to be accessed sequentially since $\overline{ADS} = V_{IL}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.
- 34. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
- 35. \overline{CE}_0 and $\overline{ADS} = V_{IL}$; CE_1 , $CNTEN$, and $CNTRST = V_{IH}$.
- 36. During "No Operation", data in memory at the selected address may be corrupted and should be re-written to ensure data integrity.

Switching Waveforms (continued)

Figure 11. Pipelined Read-to-Write-to-Read ($\overline{\text{OE}}$ Controlled)^[37, 38, 39, 40]

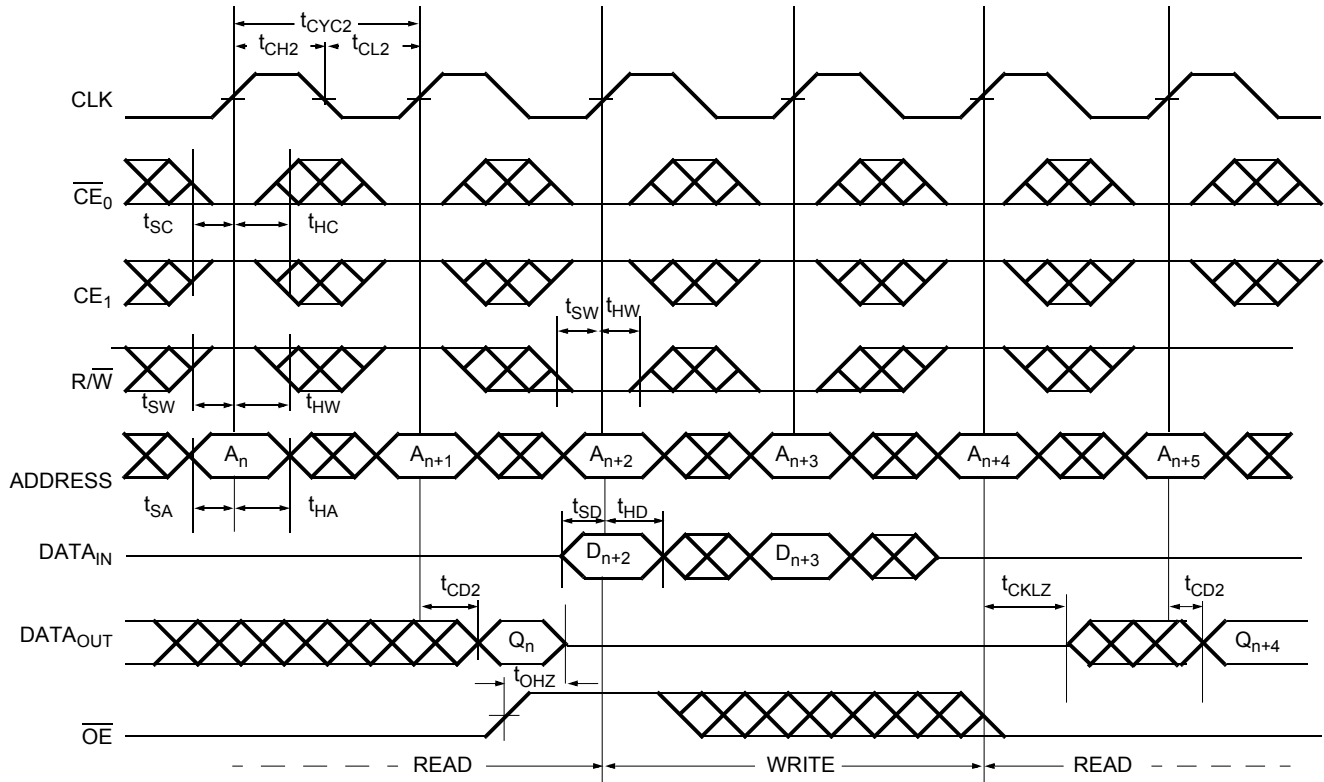


Notes

- 37. Addresses do not have to be accessed sequentially since $\overline{\text{ADS}} = V_{\text{IL}}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.
- 38. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
- 39. $\overline{\text{CE}}_0$ and $\overline{\text{ADS}} = V_{\text{IL}}$; CE_1 , CNTEN , and $\text{CNTRST} = V_{\text{IH}}$.
- 40. During "No Operation", data in memory at the selected address may be corrupted and should be re-written to ensure data integrity.

Switching Waveforms (continued)

Figure 12. Flow-through Read-to-Write-to-Read ($\overline{OE} = V_{IL}$)^[41, 42, 43, 44, 45]

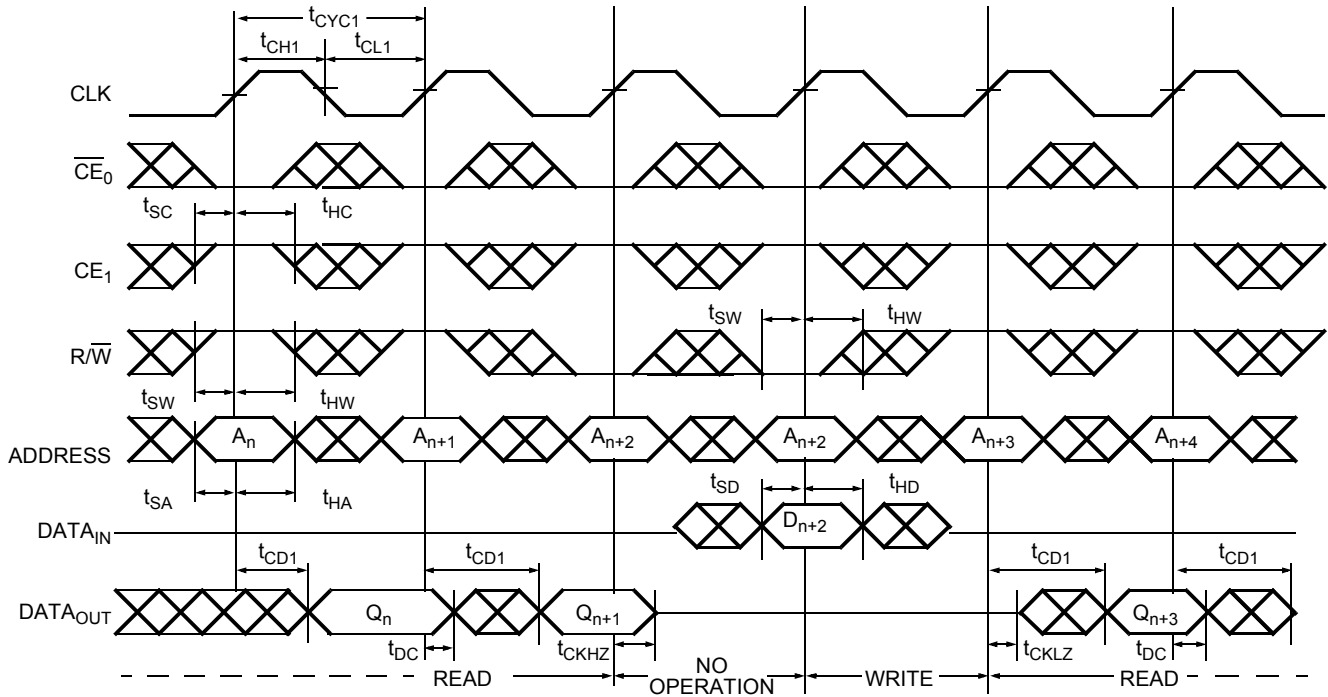


Notes

- 41. $ADS = V_{IL}$, \overline{CNTEN} and $\overline{CNTRST} = V_{IH}$.
- 42. Addresses do not have to be accessed sequentially since $\overline{ADS} = V_{IL}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.
- 43. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
- 44. \overline{CE}_0 and $ADS = V_{IL}$; CE_1 , \overline{CNTEN} , and $\overline{CNTRST} = V_{IH}$.
- 45. During "No Operation", data in memory at the selected address may be corrupted and should be re-written to ensure data integrity.

Switching Waveforms (continued)

Figure 13. Flow-through Read-to-Write-to-Read ($\overline{\text{OE}}$ Controlled)^[46, 47, 48, 49, 50]

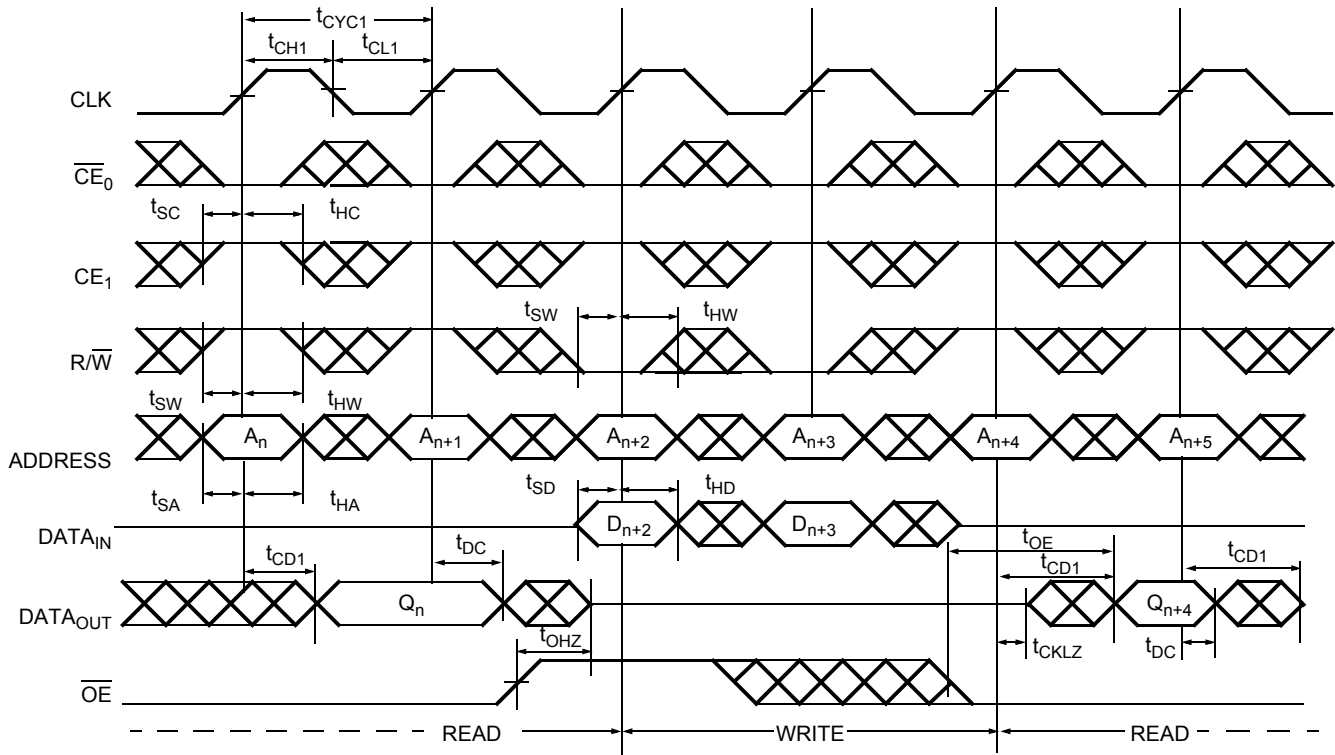

Notes

- 46. $\overline{\text{ADS}} = V_{\text{IL}}$, $\overline{\text{CNTEN}}$ and $\overline{\text{CNRST}} = V_{\text{IH}}$.
- 47. In this depth expansion example, B1 represents Bank #1 and B2 is Bank #2; Each Bank consists of one Cypress dual-port device from this datasheet. ADDRESS_(B1) = ADDRESS_(B2).
- 48. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
- 49. $\overline{\text{CE}}_0$ and $\overline{\text{ADS}} = V_{\text{IL}}$; $\overline{\text{CE}}_1$, $\overline{\text{CNTEN}}$, and $\overline{\text{CNRST}} = V_{\text{IH}}$.
- 50. During "No Operation", data in memory at the selected address may be corrupted and should be re-written to ensure data integrity.

Switching Waveforms (continued)

Figure 14. Pipelined Read with Address Counter Advance^[51]


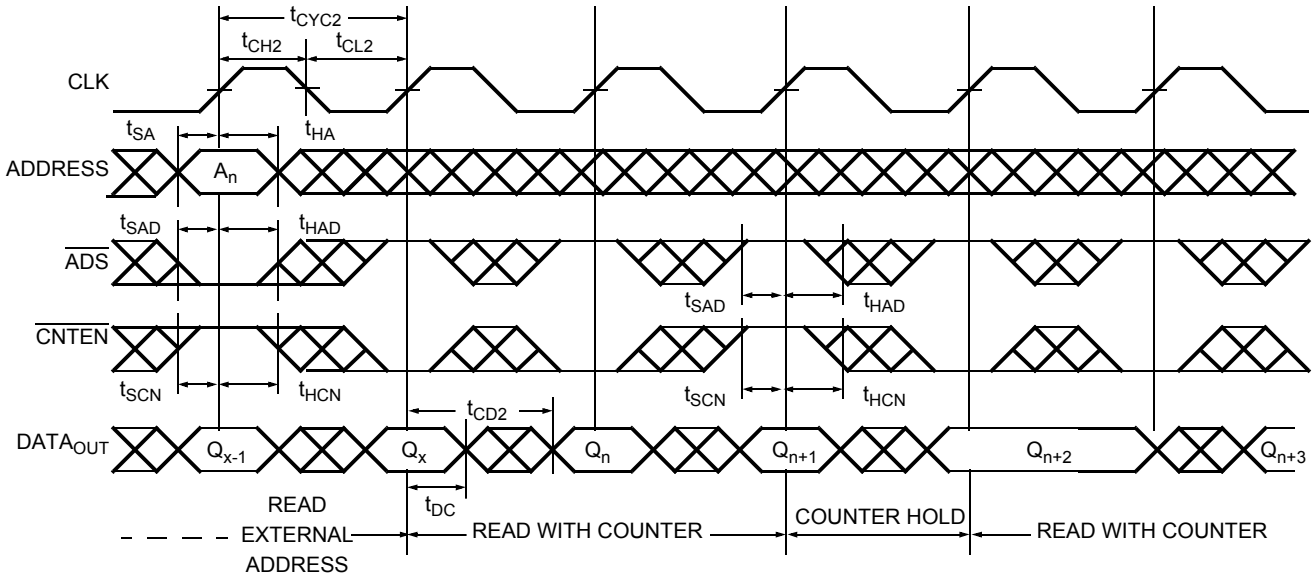



Figure 15. Flow-through Read with Address Counter Advance^[51]

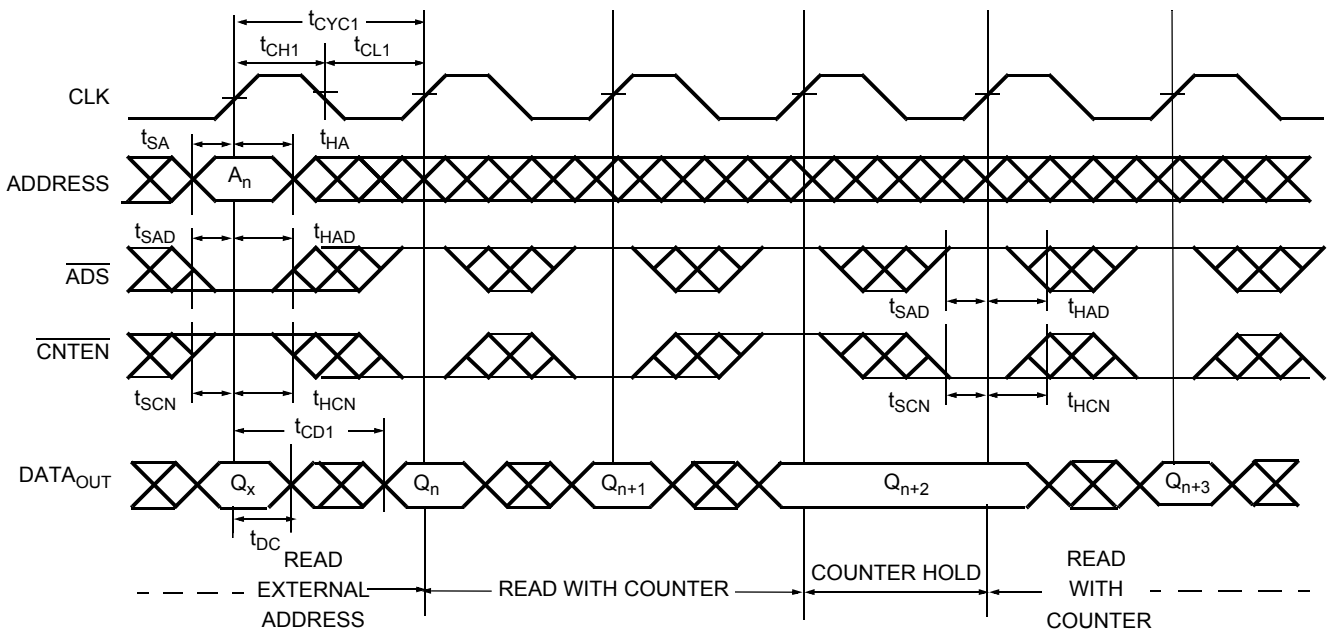

Note
51. \overline{CE}_0 and $\overline{OE} = V_{IL}$; CE_1 , R/\overline{W} and $\overline{CNTRST} = V_{IH}$.

Switching Waveforms (continued)

Figure 16. Write with Address Counter Advance (Flow-through or Pipelined Outputs)^[52, 53]

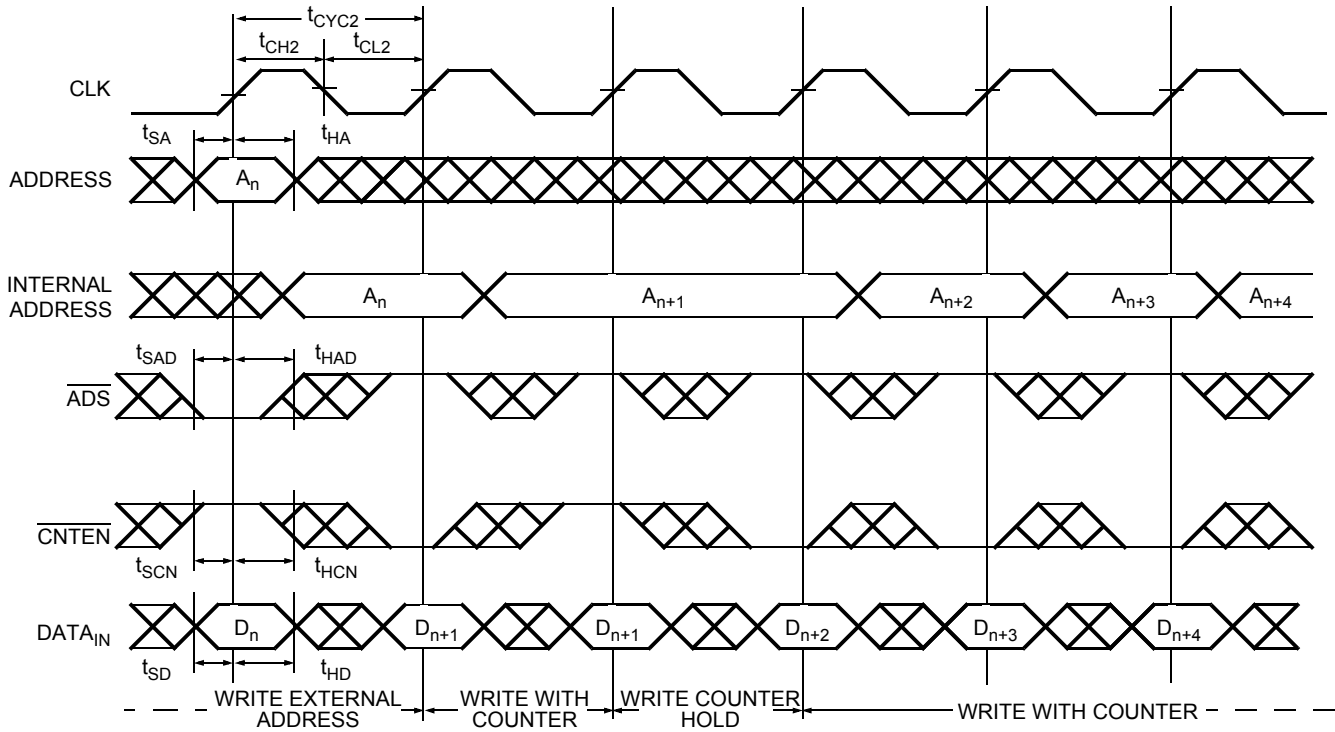


Notes

52. \overline{CE}_0 and $R/\overline{W} = V_{IL}$; CE_1 and $\overline{CNTRST} = V_{IH}$.

53. The "Internal Address" is equal to the "External Address" when $\overline{ADS} = V_{IL}$ and equals the counter output when $\overline{ADS} = V_{IH}$.

Switching Waveforms (continued)


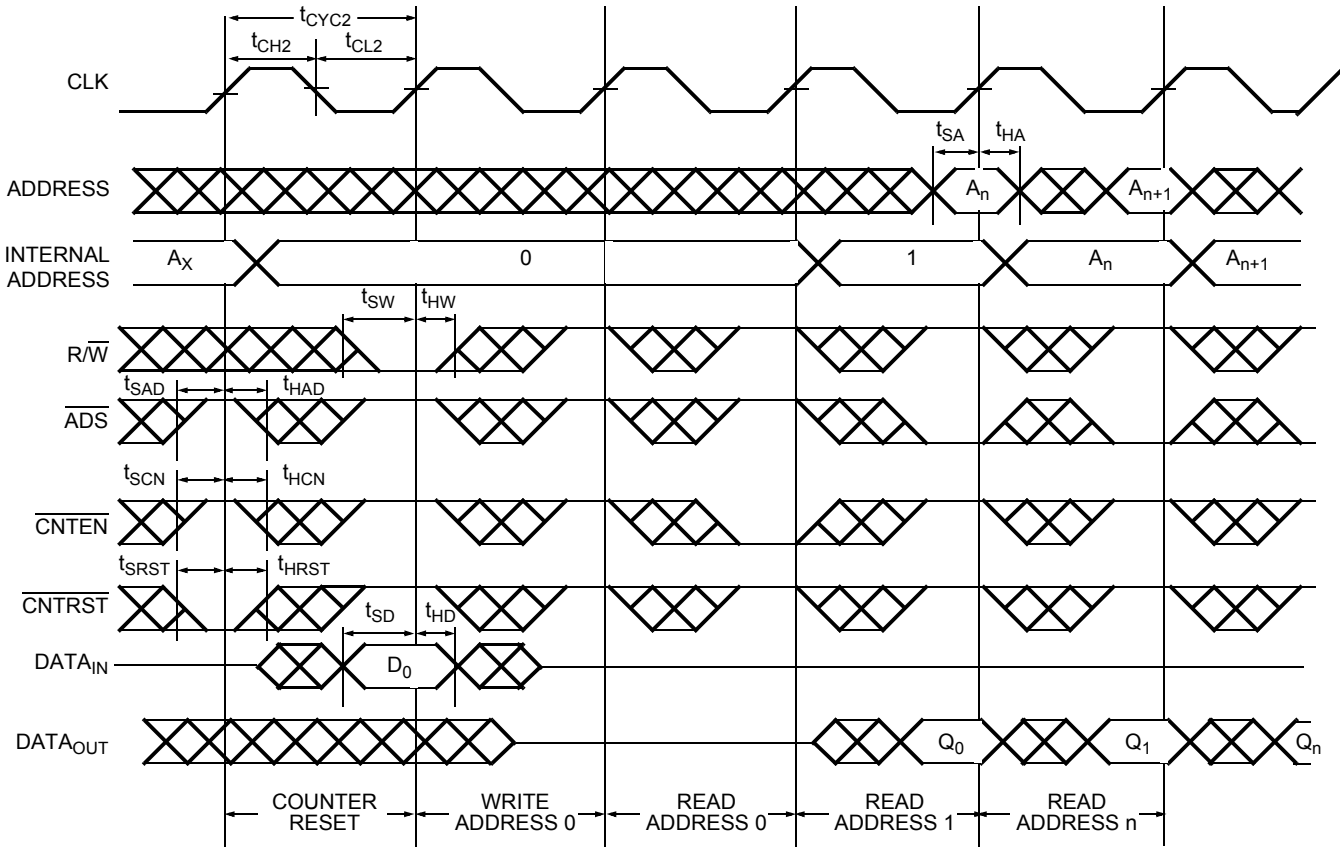


Figure 17. Counter Reset (Pipelined Outputs)^[54, 55, 56, 57]







Notes

- 54. Addresses do not have to be accessed sequentially since $\overline{ADS} = V_{IL}$ constantly loads the address on the rising edge of the CLK. Numbers are for reference only.
- 55. Output state (HIGH, LOW, or high-impedance) is determined by the previous cycle control signals.
- 56. $\overline{CE}_0 = V_{IL}$; $CE_1 = V_{IH}$.
- 57. No dead cycle exists during counter reset. A READ or WRITE cycle may be coincidental with the counter reset.

Read/Write and Enable Operation [58, 59, 60]

| Inputs | | | | | Outputs | Operation |
|--------|-----------------------------------------------------------------------------------|-----------------|-----------------|-----|------------------------------------|----------------------------|
| OE | CLK | CE ₀ | CE ₁ | R/W | I/O ₀ –I/O ₉ | |
| X |  | H | X | X | High Z | Deselected ^[61] |
| X |  | X | L | X | High Z | Deselected ^[61] |
| X |  | L | H | L | D _{IN} | Write |
| L |  | L | H | H | D _{OUT} | Read ^[61] |
| H | X | L | H | X | High Z | Outputs Disabled |

Address Counter Control Operation [58, 62, 63, 64]

| Address | Previous Address | CLK | ADS | CNTEN | CNTRST | I/O | Mode | Operation |
|----------------|------------------|------------------------------------------------------------------------------------|-----|-------|--------|-----------------------|-----------|---------------------------------------------|
| X | X |  | X | X | L | D _{out(0)} | Reset | Counter Reset to Address 0 |
| A _n | X |  | L | X | H | D _{out(n)} | Load | Address Load into Counter |
| X | A _n |  | H | H | H | D _{out(n)} | Hold | External Address Blocked—Counter Disabled |
| X | A _n |  | H | L | H | D _{out(n+1)} | Increment | Counter Enabled—Internal Address Generation |

Notes

58. "X" = "Don't Care", "H" = V_{IH}, "L" = V_{IL}.
 59. ADS, CNTEN, CNTRST = "Don't Care."
 60. OE is an asynchronous input signal.
 61. When CE changes state in the pipelined mode, deselection and read happen in the following clock cycle.
 62. CE₀ and OE = V_{IL}; CE₁ and R/W = V_{IH}.
 63. Data shown for flow-through mode; pipelined mode output will be delayed by one cycle.
 64. Counter operation is independent of CE₀ and CE₁.

Ordering Information

The following table contains only the parts that are currently available. If you do not see what you are looking for, contact your local sales representative. For more information, visit the Cypress website at www.cypress.com and refer to the product summary page at <http://www.cypress.com/products>

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives and distributors. To find the office closest to you, visit us at <http://www.cypress.com/go/datasheet/offices>.


128 K × 8 3.3 V Synchronous Dual-Port SRAM

| Speed (ns) | Ordering Code | Package Name | Package Type | Operating Range |
|---------------------|------------------|--------------|---------------------------------------|-----------------|
| 7.5 ^[65] | CY7C09099V-7AXI | A100 | 100-pin Thin Quad Flat Pack (Pb-free) | Industrial |
| 12 | CY7C09099V-12AXC | A100 | 100-pin Thin Quad Flat Pack (Pb-free) | Commercial |

32 K × 9 3.3 V Synchronous Dual-Port SRAM

| Speed (ns) | Ordering Code | Package Name | Package Type | Operating Range |
|------------|------------------|--------------|---------------------------------------|-----------------|
| 12 | CY7C09179V-12AXC | A100 | 100-pin Thin Quad Flat Pack (Pb-free) | Commercial |

Ordering Code Definitions

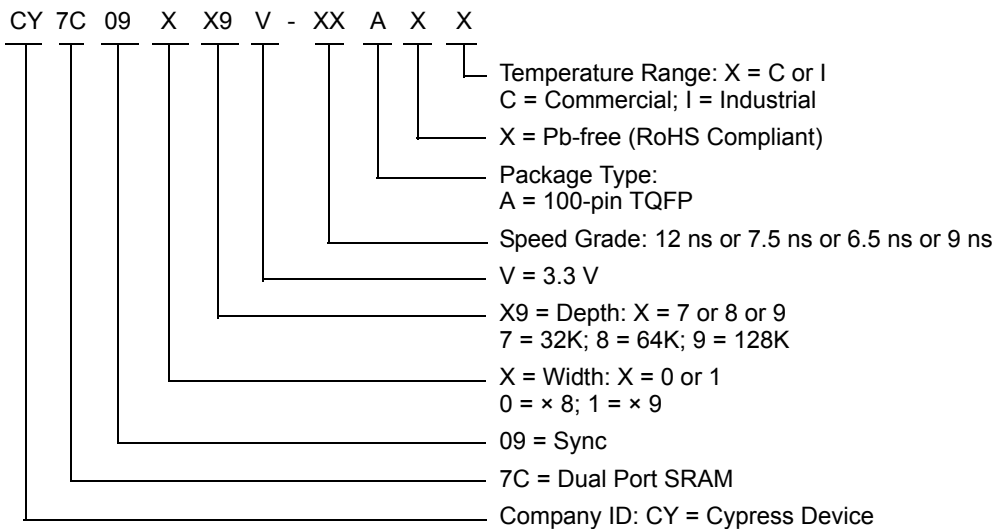

Note

65. See [page 9](#) and [page 10](#) for Load Conditions.

Acronyms

| Acronym | Description |
|---------|-----------------------------------------|
| CMOS | complementary metal oxide semiconductor |
| I/O | input/output |
| OE | output enable |
| SRAM | static random access memory |
| TQFP | thin quad flat pack |
| TTL | transistor transistor logic |
| WE | write enable |

Document Conventions

Units of Measure

| Symbol | Unit of Measure |
|--------|-----------------|
| °C | degree Celcius |
| MHz | Mega Hertz |
| μA | micro Amperes |
| mA | milli Amperes |
| mm | milli meter |
| ms | milli seconds |
| mV | milli Volts |
| ns | nano seconds |
| Ω | Ohms |
| % | percent |
| pF | pico Farad |
| V | Volts |
| W | Watts |

Document History Page

| Document Title: CY7C09089V/99V, CY7C09179V/99V, 3.3 V 32 K/64 K/128 K × 8/9 Synchronous Dual-Port Static RAM Document Number: 38-06043 | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev. | ECN No. | Orig. of Change | Orig. of Change | Description of Change |
| ** | 110191 | SZV | 09/29/01 | Change from Spec number: 38-00667 to 38-06043 |
| *A | 122293 | RBI | 12/27/02 | Power up requirements added to Operating Conditions Information |
| *B | 365034 | PCN | See ECN | Added Pb-Free Logo Added Pb-Free Part Ordering Information: CY7C09089V-6AXC, CY7C09089V-12AXC, CY7C09099V-6AXC, CY7C09099V-7AI, CY7C09099V-7AXI, CY7C09099V-12AXC, CY7C09179V-6AXC, CY7C09179V-12AXC, CY7C09189V-6AXC, CY7C09189V-12AXC, CY7C09199V-6AXC, CY7C09199V-7AXC, CY7C09199V-9AXC, CY7C09199V-9AXI, CY7C09199V-12AXC |
| *C | 2623658 | VKN/PYRS | 12/17/08 | Added CY7C09089V-12AXI part in the Ordering information table |
| *D | 2897159 | RAME | 03/22/10 | Removed inactive parts from ordering information table. Updated package diagram. Added Note in ordering information section. |
| *E | 3110406 | ADMU | 12/14/2010 | Updated Ordering Information . Added Ordering Code Definitions . |
| *F | 3264673 | ADMU | 05/24/2011 | Updated Document Title to read "CY7C09089V/99V, CY7C09179V/99V, 3.3 V 32 K/64 K/128 K × 8/9 Synchronous Dual-Port Static RAM". Updated Features . Updated Pin Configurations (Removed the Note "This pin is NC for CY7C09079V." in page 5). Updated Selection Guide . Updated Package Diagram . Added Acronyms and Units of Measure . Updated in new template. |
| *G | 3849285 | ADMU | 12/21/2012 | Updated Ordering Information (Updated part numbers). Updated Package Diagram : spec 51-85048 – Changed revision from *E to *G. |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at cypress.com/sales.

Products

| | |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Automotive | cypress.com/go/automotive |
| Clocks & Buffers | cypress.com/go/clocks |
| Interface | cypress.com/go/interface |
| Lighting & Power Control | cypress.com/go/powerpsoc cypress.com/go/plc |
| Memory | cypress.com/go/memory |
| Optical & Image Sensing | cypress.com/go/image |
| PSoC | cypress.com/go/psoc |
| Touch Sensing | cypress.com/go/touch |
| USB Controllers | cypress.com/go/USB |
| Wireless/RF | cypress.com/go/wireless |

PSoC Solutions

psoc.cypress.com/solutions
PSoC 1 | PSoC 3 | PSoC 5

© Cypress Semiconductor Corporation, 2001-2012. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.