


## 25/30 W DC-DC CONVERTER FAMILY

Type	V <sub>i</sub>	V <sub>o</sub>	I <sub>o</sub>
GS25T48-5	36 to 72 V	5 V	5 A
GS30T48-12	36 to 72 V	12 V	2.5 A
GS30T48-15	36 to 72 V	15 V	2 A

### FEATURES

- MTBF in excess of 1M hours at +45°C ambient temperature
- Wide input voltage range (36 to 72V)
- No external component required
- High efficiency (see data)
- Non latching permanent short-circuit protection
- Overvoltage protection
- Redundant operation
- Remote output voltage sense
- Remote INHIBIT/ENABLE
- Soft-start
- Minimized reflected input current
- Reverse input polarity protection
- Peak input overvoltage withstand
- No derating over the temperature range
- 500VDC minimum isolation between input and output
- PCB or chassis mountable

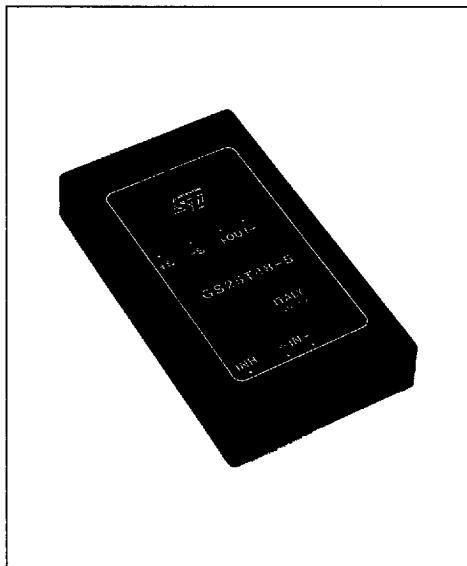

### DESCRIPTION

The GS25T48-5, GS30T48-12 and GS30T48-15 are isolated DC-DC converters designed for general purpose application.

The output power is in the range of 25W to 30W. To ensure very long life, these converters do not use electrolytic aluminum capacitors or optoelectronic feedback systems.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>i</sub>	DC Input Voltage	34 to 72V	V
V <sub>ipk</sub>	Input Transient Overvoltage ( $t \leq 1\text{ sec.}$ )	90	V
V <sub>ir</sub>	Input Reverse Voltage	-100	V
T <sub>stg</sub>	Storage Temperature Range	-55 to +105	°C
T <sub>op</sub>	Operating Temperature Range	-25 to +71	°C


ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25^\circ C$  unless otherwise specified)

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
$V_i$	Input Voltage	Full Load		36	48	72	V
$I_i$	Input Current	GS25T48-5	Full Load		640		mA
		GS30T48-12	Full Load		730		
		GS30T48-15	Full Load		730		
$I_{ir}$	Input Reflected Current	$V_i = 48V$	Full Load		50		mApp
$I_{isc}$	Input Short-circuit Current	GS25T48-5 $V_i = 48V$			710		mA
		GS30T48-12 $V_i = 48V$			820		
		GS30T48-15 $V_i = 48V$			820		
$I_{iq}$	Input Quiescent Current	$V_i = 48V$ Converter OFF			5		mA
$V_{inhl}$	Low Inhibit Voltage	$V_i = 48V$	Full Load			1.2	V
$V_{enh}$	High Enable Voltage	$V_i = 48V$	Full Load	1.8 (open)			V
$I_{inh}$	Input Inhibit Current	$V_i = 48V$	Full Load		1		mA
$V_o$	Output Voltage	GS25T48-5 $V_i = 48V$	Full Load	4.95	5.00	5.05	V
		GS30T48-12 $V_i = 48V$	Full Load	11.88	12.00	12.12	
		GS30T48-15 $V_i = 48V$	Full Load	14.85	15.00	15.15	
$V_{or}$	Output Ripple and Noise Voltage	$V_i = 48V$ Full Load			10		mVpp
$\delta V_{OL}$	Line Regulation	$V_i = 36$ to $72V$ Full Load			$\pm 0.001$		%
$\delta V_{OO}$	Load Regulation	$V_i = 48V$ Full Load to No Load			$\pm 0.05$		%
$V_{ovv}$	Output Overvoltage Protection	GS25T48-5 $V_i = 48V$	Full Load			6.8	V
		GS30T48-12 $V_i = 48V$	Full Load			15	
		GS30T48-15 $V_i = 48V$	Full Load			18	
$\Delta V_o$	Total remote sense compensation	$V_i = 36V$				1	V
$T_c$	Temperature Coefficient	$V_i = 48V$ Operating Temperature Range	Full Load			+0.02	%/°C

ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25^\circ C$  unless otherwise specified) (cont'd)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$I_o$	Output Current	GS25T48-5 $V_i = 36$ to $72V$	0		5	A
		GS30T48-12 $V_i = 36$ to $72V$	0		2.5	
		GS30T48-15 $V_i = 36$ to $72V$	0		2	
$I_{osck}$	Output Current Limit	GS25T48-5 $V_i = 48V$ Overload			5.5	A
		GS30T48-12 $V_i = 48V$ Overload			2.75	
		GS30T48-15 $V_i = 48V$ Overload			2.2	
$t_{ss}$	Soft-start Time	$V_i = 48V$ Full Load		30		ms
$t_{rt}$	Transient Recovery Time	$V_i = 48V$ Step Load Change $\delta I_o = 25\%$		75		$\mu s$
$V_{is}$	Isolation Voltage		500			V <sub>DC</sub>
$R_{is}$	Isolation Resistance		$10^9$			$\Omega$
$f_s$	Switching Frequency			150		kHz
$\eta$	Efficiency	GS25T48-5 $V_i = 48V$ Full Load		81		%
		GS30T48-12 $V_i = 48V$ Full Load		86		
		GS30T48-15 $V_i = 48V$ Full Load		86		
$R_{thc}$	Thermal Resistance Case to Ambient			4		°C/W

## CONNECTION DIAGRAM AND MECHANICAL DATA

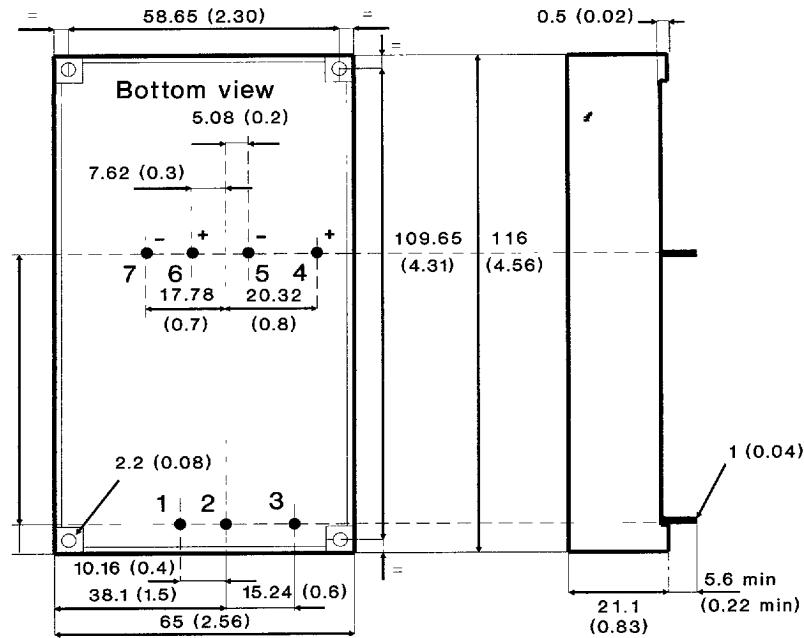

Package F. Dimensions in mm. (inches)

## PIN DESCRIPTION

Pin	Function	Description
1	- IN	Negative input voltage.
2	+ IN	Positive input voltage. Unregulated input voltage (typically 48V) must be applied between pins 1-2. The input section of the DC-DC converter is protected against reverse polarity by a series diode. No external fuse is required. Input is filtered by a Pi network.
3	ON/OFF	Logically compatible with CMOS or open collector TTL. The converter is ON (Enable) when the voltage applied to this pin with reference to pin 1 is higher than 1.8V. The converter is OFF (Inhibit) for a control voltage lower than 1.2V. When the pin is unconnected the converter is ON (Enable).
4	+ SENSE	Senses the remote load high side. To be connected to pin 6 when remote sense is not used.
5	- SENSE	Senses the remote load return. To be connected to pin 7 when remote sense is not used.
6	+ OUT	Output voltage.
7	- OUT	Output voltage return.