


“Ecoline Series 504” PLCC sockets are designed for JEDEC type substrates and will operate safely under normal to moderately severe conditions

Bottom cover is designed to minimize danger of flux wicking and brown PPS insulator (RYTON R-4) with ventilation zone underneath component greatly improves heat dissipation

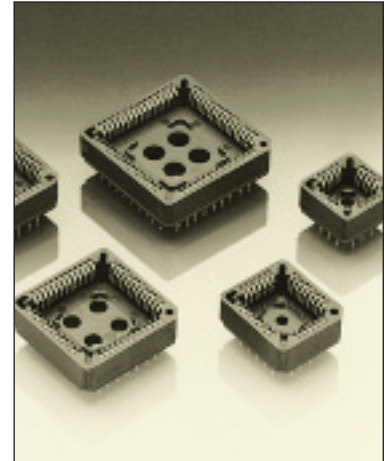

Plating	Stamped contacts
99	tin-lead over nickel Please note: 99 is the only plating available for this product.

Ordering information
For standard part numbers please refer to table Order Codes
For PCB hole patterns see page 94

No. of poles	Order Codes	Dimensions							
		A ₁	A ₂	B ₁	B ₂	C ₁	C ₂	E	
20	504-99-020-24-000	15.56	15.56	5.08	5.08	9.62	9.62	18.06	
28	504-99-028-24-000	18.10	18.10	7.62	7.62	11.90	11.90	21.70	
32*	504-99-032-24-000	18.10	20.64	7.62	10.16	11.84	14.40	23.70	
44	504-99-044-24-000	23.18	23.18	12.70	12.70	17.00	17.00	28.50	
52	504-99-052-24-000	25.72	25.72	15.24	15.24	19.50	19.50	32.46	
68	504-99-068-24-000	30.80	30.80	20.32	20.32	24.65	24.65	39.94	
84	504-99-084-24-000	35.88	35.88	25.40	25.40	29.65	29.65	47.00	
100	504-99-100-24-000	not available from stock, please consult							
	* rectangular								

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.