




Glass Passivated Single-In-Line Bridge Rectifier

Major Ratings and Characteristics

| | |
|-------------|----------------|
| $I_{F(AV)}$ | 4 A |
| V_{RRM} | 200 V to 800 V |
| I_{FSM} | 80 A |
| I_R | 5 μ A |
| V_F | 1.0 V |
| T_j max. | 150 °C |

Case Style GSIB-3G

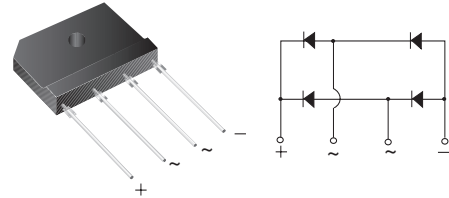

Features

- UL Recognition file number E54214
- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 1500 V_{RMS}
- Meets MSL level 1, per J-STD-020C

Mechanical Data

Case: GSIB-3G

Epoxy meets UL-94V-0 Flammability rating

Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and MIL-STD-750, Method 2026

Polarity: As marked on body

Mounting Torque: 10 cm·kg (8.8 inches·lbs) max.

Recommended Torque: 5.7 cm·kg (5 inches·lbs)

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications

Maximum Ratings

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Symbol | GSIB4A20 | GSIB4A40 | GSIB4A60 | GSIB4A80 | Unit |
|---|----------------|--|----------|----------|----------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 200 | 400 | 600 | 800 | V |
| Maximum RMS voltage | V_{RMS} | 140 | 280 | 420 | 560 | V |
| Maximum DC blocking voltage | V_{DC} | 200 | 400 | 600 | 800 | V |
| Maximum average forward rectified output current at $T_C = 100\text{ }^\circ\text{C}$ $T_A = 25\text{ }^\circ\text{C}$ | $I_{F(AV)}$ | 4.0 ⁽¹⁾ 2.3 ⁽²⁾ | | | | A |
| Peak forward surge current single sine-wave superimposed on rated load | I_{FSM} | 80 | | | | A |
| Rating for fusing ($t < 8.3\text{ ms}$) | I^2t | 32 | | | | A ² sec |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 150 | | | | °C |

Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Test condition | Symbol | GSIB4A20 | GSIB4A40 | GSIB4A60 | GSIB4A80 | Unit |
|---|---|--------|------------|----------|----------|----------|---------|
| Maximum instantaneous forward drop per leg | at 2.0 A | V_F | 1.00 | | | | V |
| Maximum DC reverse current at rated DC blocking voltage per leg | $T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$ | I_R | 5.0 400 | | | | μ A |

Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

| Parameter | Symbol | GSIB4A20 | GSIB4A40 | GSIB4A60 | GSIB4A80 | Unit |
|------------------------------------|-----------------|-------------------|----------|----------|----------|------|
| Typical thermal resistance per leg | $R_{\theta JA}$ | 26 ⁽²⁾ | | | | °C/W |
| | $R_{\theta JC}$ | 5 ⁽¹⁾ | | | | |

Notes:

- (1) Unit case mounted on Al plate heatsink.
- (2) Units mounted on P.C.B. with 0.5 x 0.5" (12 x 12 mm) copper pads and 0.375" (9.5 mm) lead length
- (3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw

Ratings and Characteristics Curves

($T_A = 25\text{ °C}$ unless otherwise noted)

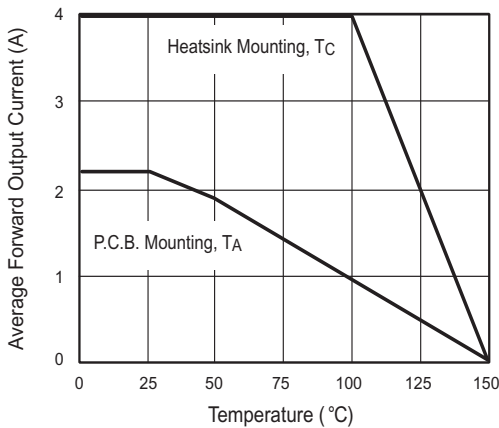


Figure 1. Derating Curve Output Rectified Current

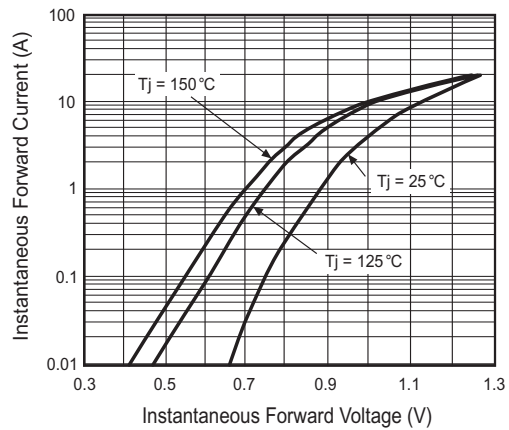


Figure 3. Typical Forward Characteristics Per Leg

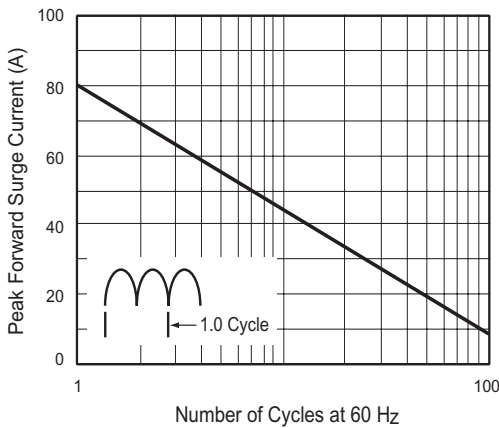


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

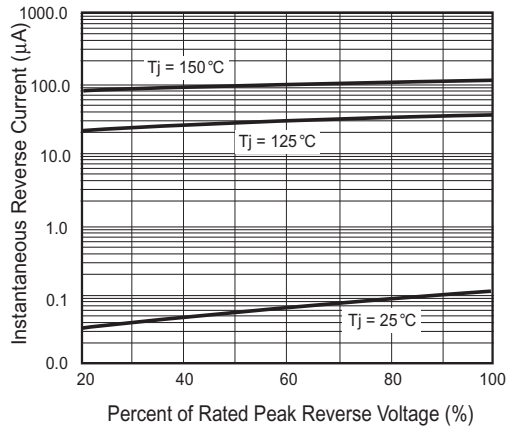


Figure 4. Typical Reverse Characteristics Per Leg

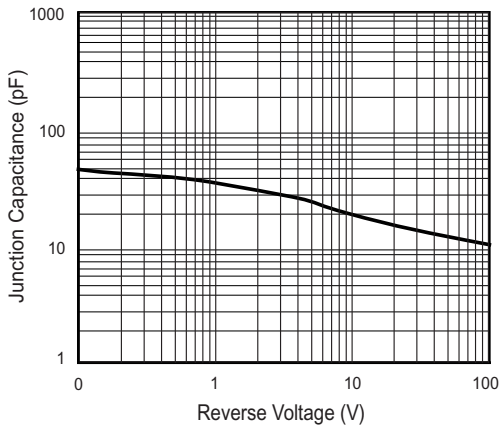


Figure 5. Typical Junction Capacitance Per Leg

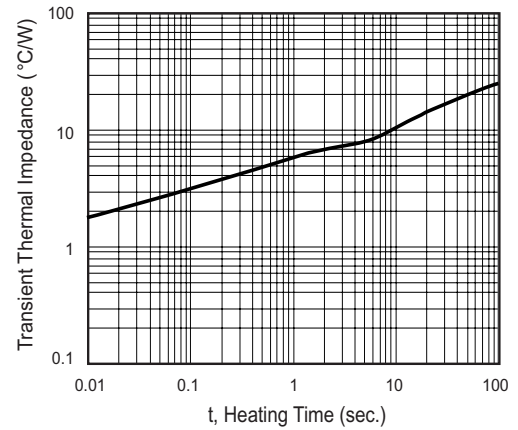


Figure 6. Typical Transient Thermal Impedance Per Leg

Package outline dimensions in inches (millimeters)

Case Style GSIB-3G

