




## RLT7870MG



### TECHNICAL DATA

## High Power Infrared Laser Diode

#### Features

- Lasing Mode Structure: single transverse mode
- Peak Wavelength : typ. 785 nm
- Optical Output Power: 70 mW
- Package: 5.6 mm



#### Electrical Connection

Pin Configuration		Bottom View								
	<p><i>n-type</i></p> <table border="1"> <thead> <tr> <th>PIN</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>LD Anode</td> </tr> <tr> <td>2</td> <td>LD Cathode</td> </tr> <tr> <td>3</td> <td></td> </tr> </tbody> </table>	PIN	Function	1	LD Anode	2	LD Cathode	3		
PIN	Function									
1	LD Anode									
2	LD Cathode									
3										

#### Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ )

Item	Symbol	Value	Unit
CW Output Power	$P_O$	70	mW
Pulsed Output Power*	$P_{O,pulse}$	100	mW
Reverse Voltage	$U_R$	2	$T_C$
Operating Case Temperature	$T_C$	-10 ... +60	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ... +100	$^\circ\text{C}$

\* duty < 50%, pulse width < 0.1 $\mu\text{s}$

#### Specifications ( $T_C=25^\circ\text{C}$ )


Item	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
<b>Optical Specification</b>						
CW Output Power	CW, $P_O = 60\text{mW}$	$P_O$	-	-	70	mW
Peak Wavelength	CW, $P_O = 60\text{mW}$	$\lambda_P$	775	785	798	nm
FWHM Beam Divergence	CW, $P_O = 60\text{mW}$	$\theta_{\parallel}$	7	9	11	deg
		$\theta_{\perp}$	17	20	24	deg
<b>Electrical Specification</b>						
Threshold Current	CW	$I_{th}$	-	40	50	mA
Operating Current	CW, $P_O = 60\text{mW}$	$I_{op}$	-	95	140	mA
Slope Efficiency	CW, $P_O = 60\text{mW}$	$\eta$	-	1.0	-	mW/mA
Operating Voltage	CW, $P_O = 60\text{mW}$	$U_{op}$	-	1.8	2.2	V

The above specifications are for reference purpose only and subjected to change without prior notice.



## Package Dimensions

### 9 mm Package (Unit:mm)

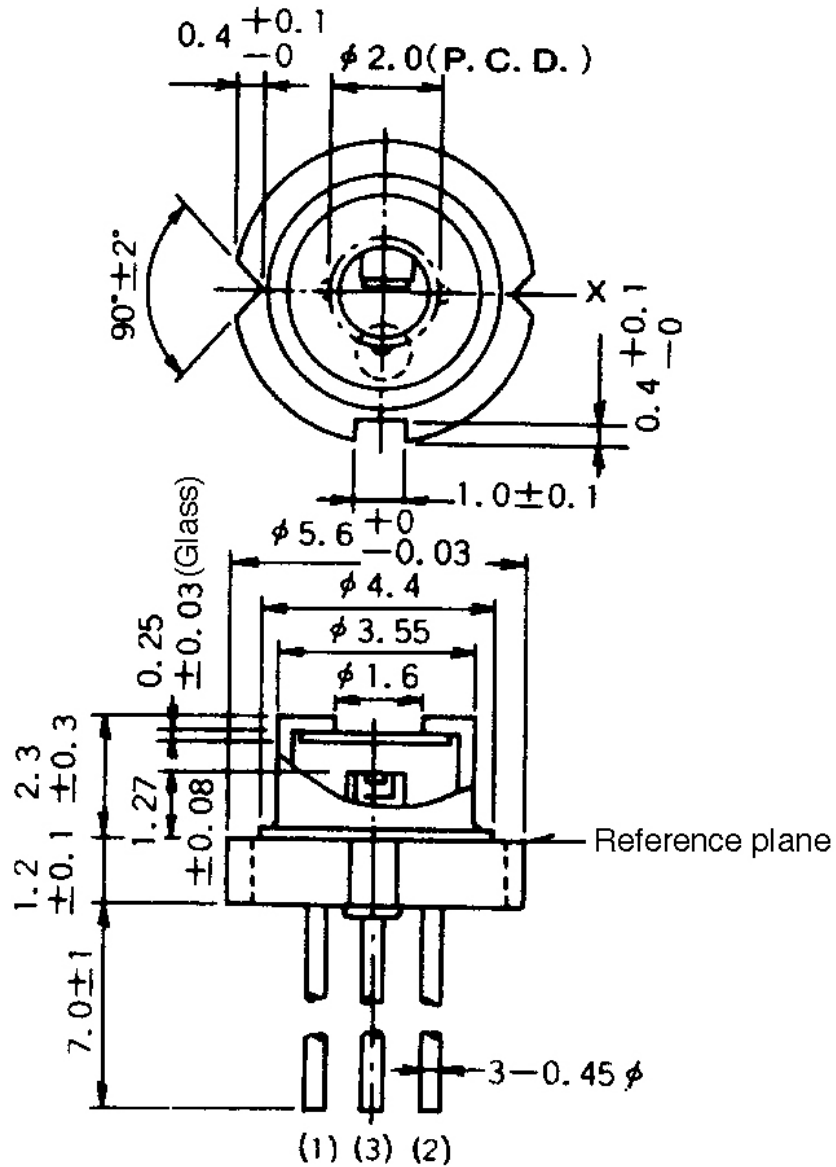



## Safety of Laser light

- Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.
- These LDs are emitting invisible light.



## Cautions

### 1. Operating methode

- This LD shall change its forward voltage requirement and optical output power according to temperature change. Also, the LD will require more operation current to maintain same output power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by switching on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriate countermeasures to reduce chattering and/or overshooting in the circuit.

### 2. Static Electricity

- Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist strap or anti-electrostatic glove when handling the product.

### 3. Absolute Maximum Rating

- Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.



**NOTE**  
LASERDIODE  
MUST BE COOLED