

## Overview

KEMET S501 Series Supercapacitors use a proprietary electrode design to deliver a very high power density. This product features high power performance of up to 600 F capacity in a single ended, board mountable, snap-in termination construction.

## Applications

Typical applications include automotive subsystems, backup power/UPS, handheld/portable devices, hybrid energy storage, hybrid drivetrains, windmill pitch control, emergency lighting, medical devices, power correction, engine starting, and renewable energy.

## Benefits


- Board mountable
- Solderable
- High power
- High rate cycling
- Long life
- Operating temperature range of -40°C to +65°C
- High cycle life > 500,000 cycles
- RoHS Compliant
- Made in USA



## Part Number System

S501	DC	107	V	2R7	A
Series	Size Code (D x L)	Capacitance Code (μF)	Capacitance Tolerance	Rated Voltage (VDC)	Termination Code
Supercapacitor, Snap-In Termination	DC = 22 x 45 LF = 35 x 60 LI = 35 x 69 LR = 35 x 89	Digits 7 & 8 indicate the first two digits of the capacitance value. Digit 9 indicates the number of zeros to be added.	V = -5/+10% W = -0/+20%	2R7 = 2.7	A= 2 pin, 10 mm lead spacing, 5.9 mm terminal length U = 4 pin standard snap-in style

## Dimensions – Millimeters

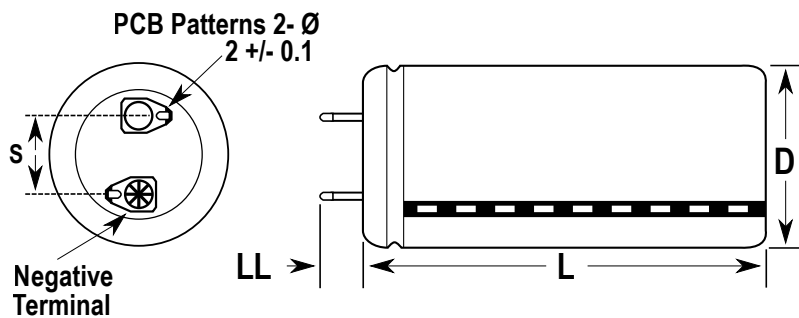

Part Number	D		L		S		LL	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
S501DC107W2R7A	22	+1.0/-0	45	+/-2.0	10	+/-0.1	5.9	+/-1.0
S501LF357V2R7A	35	+1.0/-0	59	+/-2.0	10	+/-0.1	5.9	+/-1.0
S501LF357V2R7U	35	+0.6/-0.3	62	+/-1.0	23	+/-0.1	5.9	+/-1.0
S501LI407V2R7A	35	+1.0/-0	69	+/-2.0	10	+/-0.1	5.9	+/-1.0
S501LR607V2R7A	35	+1.0/-0	89	+/-2.0	10	+/-0.1	5.9	+/-1.0

## Performance Characteristics

Item	Performance Characteristics
Rated Voltage	2.7 VDC
Surge Voltage	2.85 VDC
Capacitance Range	100 – 600 F
Capacitance Tolerance	-5/+10%; [100 F -0/+20%]
Temperature Range	-40°C to +65°C
Storage Temperature Range	-40°C to +70°C
Life, DC	10 years, rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR $< 100\%$ increase
Life, Endurance	1,000 hours, rated voltage, 65°C
	$\Delta C < 20\%$ decrease, ESR $< 100\%$ increase
Life, Shelf	1,000 hours, no voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR $< 100\%$ increase
Life, Cycle	> 500,000 cycles, rated to half rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR $< 100\%$ increase
Standards Compliance	RoHS, UL810a, BS EN 60068-2-6,27,29, IEC 60068-2-14, SAE J2464, J2390, J1455, ASTM B117, IP65, MIL-STD-810 B, Test Methods 516.3-5, 514.3-1, 509.2-1

## Approvals

Series	Test Type	Test Standard	Date completed (or estimated)
S501	Vibration	IEC 60068-2-6	May 2013
		SAE J2380	
		ISO 16750-3	
	Mechanical shock	IEC 60068-2-27	
	Underwriters Laboratory	UL-810A <sup>1</sup>	by Partnumber
SAE Safety And Abuse	SAE J24645 <sup>2</sup>	pending 12/31/2013	

<sup>1</sup> UL-810A includes the following tests: Short Circuit, Abnormal Charge, Heating, Crush, Impact, Shock, Vibration

<sup>2</sup> SAE J2464 Includes the following tests: Nail Penetration, Crush, Thermal Stability, Thermal Shock, Short Circuit, Overcharge, Forced Vent

## Environmental Compliance

All KEMET supercapacitors are RoHS Compliant.



RoHS Compliant

### Table 1 – Ratings & Part Number Reference

Part Number	S501DC107W2R7A	S501LF357V2R7A	S501LF357V2R7U	S501LI407V2R7A	S501LR607V2R7A
Electrical					
Capacitance (F)	100	350	350	400	600
Capacitance Tolerance	-0/+20%	-5/+10%	-5/+10%	-5/+10%	-5/+10%
Rated Voltage (V)	2.7	2.7	2.7	2.7	2.7
Surge Voltage (V)	2.85	2.85	2.85	2.85	2.85
ESR, DC $\leq$ (m $\Omega$ ) [10ms]	4.2	3.2	2.7	3.2	3.2
ESR, AC 1 kHz $\leq$ (m $\Omega$ )	3.6	3.1	2.4	3	3
Inductance $\pm$ 30 (nH)	120	150	150	150	150
72 Hour Leakage $\leq$ (mA)	0.27	1	1	1.2	1.5
Cycling					
Current, Peak [1s] (A)	95	223	243	237	277
Continuous Current (A)*	13	24	24	24	28
Current, Short Circuit (A)	643	844	750	844	844
Thermal					
Resistance, Thermal ( $^{\circ}$ C/W)	22	11	10	10	8
Energy/Power					
Maximum Stored Energy (Wh)	0.1	0.35	0.35	0.41	0.61
Energy Density (Wh/kg)	5.1	5.4	5.4	5.3	6.3
Energy Density (Wh/L)	5.9	6.2	5.9	6.2	7.1
Power Density (kW/kg)	21.7	8.6	10.2	7.4	5.9
Power Density (kW/L)	25.5	10	11.2	8.8	6.6
Maximum Power (kW/kg)	10.4	4.1	4.9	3.6	2.8
Physical					
Case Size	DC	LF	LF	LI	LR
D x L (mm)	22 x 45	35 x 59	35 x 62	35 x 69	35 x 89
Weight (kg)	0.02	0.066	0.066	0.077	0.096
Volume (L)	0.017	0.057	0.06	0.065	0.086
Volume of ACN (L)	0.008	0.027	0.027	0.031	0.042

\*Rated current = continuous current with 20°C temperature rise.

## Mounting

Do not scratch or file the lead terminals. The terminals are plated with metal and the removal of the plated material will cause poor solderability.

Do not overheat when soldering. Solder temperature lower than 260°C and time shorter than 5 seconds are recommended. For hand soldering, tip temperature should be no higher than 350°C (662°F) for a maximum contact time of 3 seconds. Only the snap-in terminals should come into contact with liquid solder or iron. Excessive heat on the snap-in terminal boards can cause damage to seals, shrink sleeve, and electrodes resulting in shortened life or premature part failure.

**IMPORTANT! DO NOT DEFORM, PULL or TWIST the terminals.** The terminals are attached to the electrodes in the interior of the aluminum casing and are tightly embedded in the rubber-plug sealing the casing. Repeated or forceful bending, pulling, or twisting of the terminal may create a path opening along the terminal in the rubber for electrolyte to leak out. The electrolyte leakage may not only shorten the useful life of the product, but it may also cause corrosion and/or short-circuit of neighboring circuitry. If deforming the terminal is unavoidable or essential to the assembly process, please use needle-nose pliers to bend the lead wire while holding the base of the same terminal using another needle-nose pliers so that the force applied to the wire is not transmitted to the rubber seal.

KEMET recommends utilizing a PC board when connecting the cells to the circuit or electronic devices. In addition, avoid placing exothermic components near the supercapacitor or on the opposite side of the PC board.

Please maintain a minimum distance of 3 mm between the bottom surface (opposite terminals) of the cell and other components/housings in order to allow for unimpeded venting of gas through the safety vent.

## Packaging Quantities

Part Number	Capacitance (F)	Rated Voltage	Package Type	Package Quantity	Box Weight	Box Length	Box Width	Box Height
S501DC107W2R7A	100	2.7	Box with Cardboard Separators	128	7 lbs (3.2 kgs)	15.0" (381 mm)	8.0" (203 mm)	3.5" (89 mm)
S501LF357V2R7A	350	2.7		50	8 lbs (3.7 kgs)	15.0" (381 mm)	8.0" (203 mm)	3.5" (89 mm)
S501LF357V2R7U	350	2.7		50	9 lbs (4.1 kgs)	15.0" (381 mm)	8.0" (203 mm)	3.5" (89 mm)
S501LI407V2R7A	400	2.7		50	9 lbs (4.1 kgs)	15.0" (381 mm)	8.0" (203 mm)	3.5" (89 mm)
S501LR607V2R7A	600	2.7		65	16 lbs (7.3 kgs)	17.0" (432 mm)	8.5" (216 mm)	4.0" (102 mm)

## Standard Marking

- KEMET logo
- Rated capacitance
- Rated voltage
- Product number
- Negative terminal marking
- Energy in Wh

## KEMET Corporation World Headquarters

2835 KEMET Way  
Simpsonville, SC 29681

Mailing Address:  
P.O. Box 5928  
Greenville, SC 29606

www.kemet.com  
Tel: 864-963-6300  
Fax: 864-963-6521

**Corporate Offices**  
Fort Lauderdale, FL  
Tel: 954-766-2800

## North America

**Southeast**  
Lake Mary, FL  
Tel: 407-855-8886

**Northeast**  
Wilmington, MA  
Tel: 978-658-1663

**Central**  
Novi, MI  
Tel: 248-994-1030

**West**  
Milpitas, CA  
Tel: 408-433-9950

**Mexico**  
Guadalajara, Jalisco  
Tel: 52-33-3123-2141

## Europe

**Southern Europe**  
Paris, France  
Tel: 33-1-4646-1006

Sasso Marconi, Italy  
Tel: 39-051-939111

**Central Europe**  
Landsberg, Germany  
Tel: 49-8191-3350800

Kamen, Germany  
Tel: 49-2307-438110

**Northern Europe**  
Bishop's Stortford, United Kingdom  
Tel: 44-1279-460122

Espoo, Finland  
Tel: 358-9-5406-5000

## Asia

**Northeast Asia**  
Hong Kong  
Tel: 852-2305-1168

Shenzhen, China  
Tel: 86-755-2518-1306

Beijing, China  
Tel: 86-10-5829-1711

Shanghai, China  
Tel: 86-21-6447-0707

Taipei, Taiwan  
Tel: 886-2-27528585

**Southeast Asia**  
Singapore  
Tel: 65-6586-1900

Penang, Malaysia  
Tel: 60-4-6430200

Bangalore, India  
Tel: 91-806-53-76817

*Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.*

## Other KEMET Resources

Tools	
Resource	Location
Configure A Part: CapEdge	<a href="http://capacitoredge.kemet.com">http://capacitoredge.kemet.com</a>
SPICE & FIT Software	<a href="http://www.kemet.com/spice">http://www.kemet.com/spice</a>
Search Our FAQs: KnowledgeEdge	<a href="http://www.kemet.com/keask">http://www.kemet.com/keask</a>
Electrolytic LifeCalculator	<a href="http://www.kemet.com:8080/elc">http://www.kemet.com:8080/elc</a>

Product Information	
Resource	Location
Products	<a href="http://www.kemet.com/products">http://www.kemet.com/products</a>
Technical Resources (Including Soldering Techniques)	<a href="http://www.kemet.com/technicalpapers">http://www.kemet.com/technicalpapers</a>
RoHS Statement	<a href="http://www.kemet.com/rohs">http://www.kemet.com/rohs</a>
Quality Documents	<a href="http://www.kemet.com/qualitydocuments">http://www.kemet.com/qualitydocuments</a>

Product Request	
Resource	Location
Sample Request	<a href="http://www.kemet.com/sample">http://www.kemet.com/sample</a>
Engineering Kit Request	<a href="http://www.kemet.com/kits">http://www.kemet.com/kits</a>

Contact	
Resource	Location
Website	<a href="http://www.kemet.com">www.kemet.com</a>
Contact Us	<a href="http://www.kemet.com/contact">http://www.kemet.com/contact</a>
Investor Relations	<a href="http://www.kemet.com/ir">http://www.kemet.com/ir</a>
Call Us	1-877-MyKEMET
Twitter	<a href="http://twitter.com/kemetcapacitors">http://twitter.com/kemetcapacitors</a>

## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.