



Data Sheet

Typical Performance

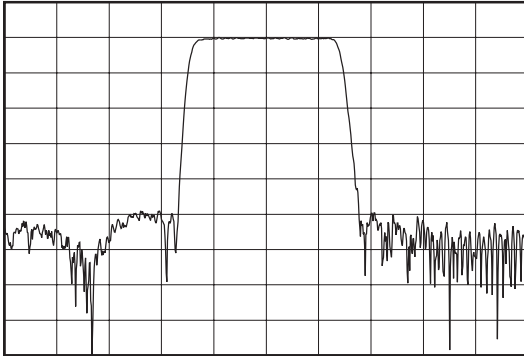

Horizontal: 8 MHz/Div  
Vertical: 10 dB/Div

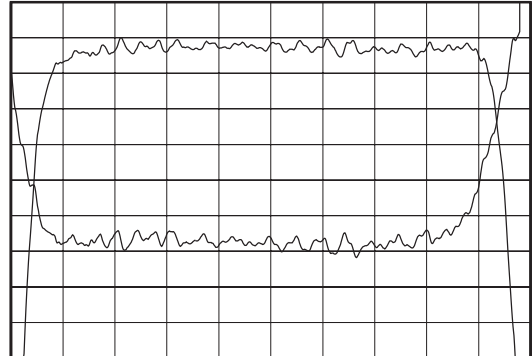


Horizontal: 2.5 MHz/Div  
Vertical: 1 dB/Div  
Vertical: 5 deg/Div


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.8	70	70.2
Insertion Loss at $F_0$	dB	-	15	16
1 dB Bandwidth	MHz	20.3	21.1	-
3 dB Bandwidth	MHz	22	22.3	-
40 dB Bandwidth	MHz	-	27.35	28
Passband Ripple	dB	-	0.9	1
Phase Linearity (90% of 3dB Bandwidth)	deg	-	8	11
Group Delay Variation (90% of 3dB Bandwidth)	nsec	-	65	100
Absolute Delay	$\mu$ sec	-	1.12	-
Substrate Material	-	-	YZ LiNbO <sub>3</sub>	-
Temperature Coefficient	ppm/ $^{\circ}$ C	-	-94	-
Ambient Temperature	$^{\circ}$ C	-	25	-

Package Outline

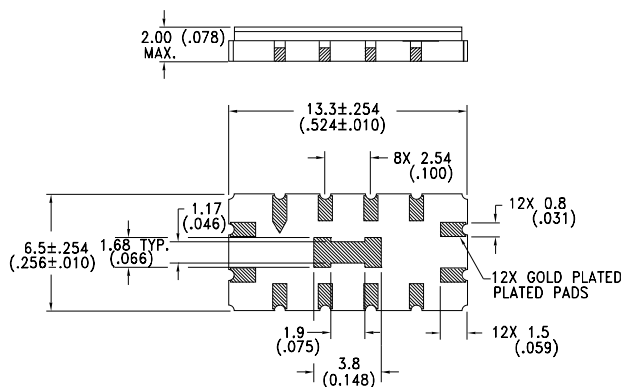

Matching Configuration

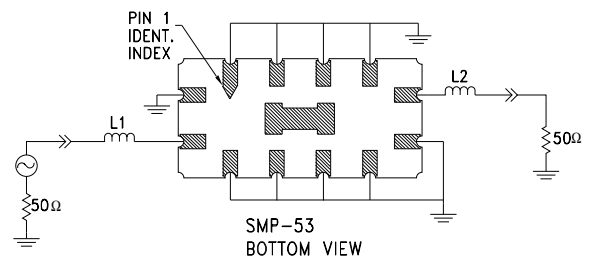

$L1 = 100\text{nH}$ ,  $L2 = 120\text{nH}$   
Nominal Source/Load Impedance =  $50\Omega$   
Package Style SMP-53

11/29/99