

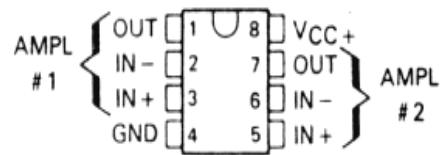
DESCRIPTION

The LM358 consists of two independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, dc gain blocks and all the conventional op amp circuits.

FEATURES

- Wide range of supply voltages
- Low supply current drain independent of supply voltage
- Low input biasing current
- Low input offset voltage and offset current
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- DC voltage gain 100 V/mV Typ
- Internally frequency compensation

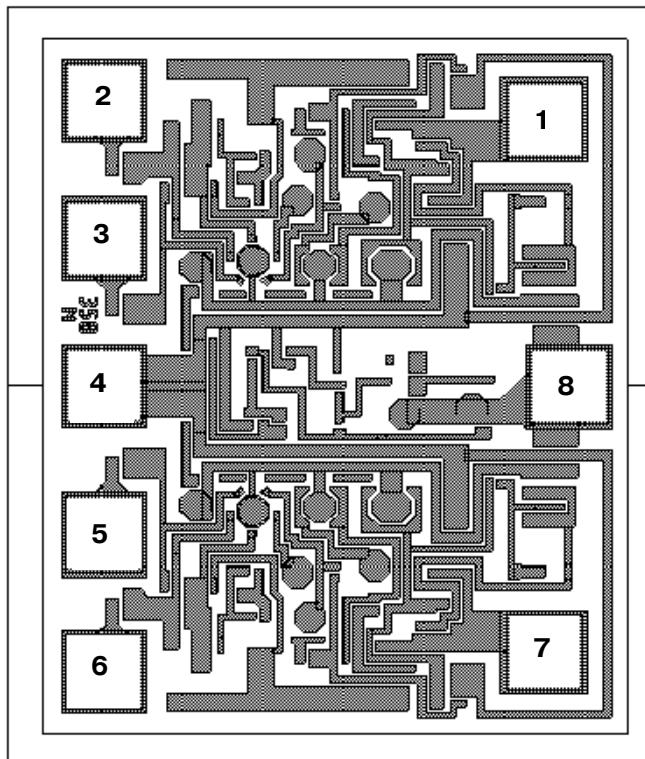
PACKAGE INFORMATION

ELECTRICAL CHARACTERISTICS

at specified free-air temperature, $V_{cc} = 5\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS*	LM358/ LM358M/ LM358MMK			UNIT
		MIN	TYP	MAX	
V_{io} Input offset voltage	$V_{cc} = 5\text{ V}$ to MAX, $V_{ic} = V_{icr}$ min, $V_o = 1.4\text{ V}$	25 °C		3	mV
		Full range		9	
αV_{io} Average temperature coefficient of input offset voltage		Full range		7	$\mu\text{V}/^\circ\text{C}$
I_{io} Input offset current	$V_o = 1.4\text{ V}$	25 °C		2	nA
		Full range		150	
αI_{io} Average temperature coefficient of input offset current		Full range		10	$\text{pA}/^\circ\text{C}$
I_{ib} Input bias current	$V_o = 1.4\text{ V}$	25 °C		-20	nA
		Full range		-250	
V_{icr} Common-mode input voltage range	$V_{cc} = 5\text{ V}$ to MAX	25 °C	0 to $V_{cc} - 1.5$		V
		Full range	0 to $V_{cc} - 2$		
V_{oh} High-level output voltage	$R_L \geq 2\text{ k}\Omega$ (NOTE 1)	25 °C	$V_{cc} - 1.5$		V
		Full range	26		
		Full range	27	28	
V_{ol} Low-level output voltage	$R_L \geq 10\text{ k}\Omega$	Full range		5	mV
				20	
A_{vd} Large-signal differential voltage amplification	$V_{cc} = 15\text{ V}$, $V_o = 1\text{ V}$ to 11 V , $R_L \geq 2\text{ k}\Omega$	25 °C	25	100	V/mV
		Full range	15		
CMRR Common-mode rejection ratio	$V_{cc} = 5\text{ V}$ to MAX, $V_{ic} = V_{icr}$ min	25 °C	65	80	dB
k_{svr} Supply voltage rejection ratio ($\Delta V_{cc}/\Delta V_{io}$)	$V_{cc} = 5\text{ V}$ to MAX	25 °C	65	100	dB
V_{o1}/V_{o2} Crosstalk attenuation	$f = 1\text{ kHz}$ to 20 kHz	25 °C		120	dB
I_o Output current	$V_{cc} = 15\text{ V}$, $V_{id} = 1\text{ V}$, $V_o = 0$	25 °C	-20	-30	mA
		Full range	-10		
		25 °C	10	20	
		Full range	5		
I_{os} Short-circuit output current	$V_{cc} = 15\text{ V}$, $V_{id} = -1\text{ V}$, $V_o = 15\text{ V}$	25 °C	12	30	μA
		25 °C			
I_{cc} Supply current (two amplifiers)	$V_o = -2.5\text{ V}$, No load	Full range		0.7	mA
		Full range		1	
$V_o = 0.5V_{cc}$, No load				2	

- All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{cc} for testing purposes is 30 V. Full range is 0 °C to 70 °C.

Note1 Only for LM358

PAD LOCATION LM358M

 Chip Size: 0.8 x 0.95 mm²
PAD LOCATION COORDINATES

Pad N	Pad Name	Pad size ($\mu\text{m} \times \mu\text{m}$)	Coordinates, μm	
			X	Y
1	#1 OUT	95 x 95	657,5	807,5
2	#1 IN-	95 x 95	116,5	831,5
3	#1 IN+	95 x 95	116,5	660,5
4	GND	95 x 95	116,5	475
5	#2 IN+	95 x 95	116,5	289,5
6	#2 IN-	95 x 95	116,5	118,5
7	#2 OUT	95 x 95	657,5	142,5
8	V _{CC}	95 x 95	687,5	474,5