



# SD4000C..R SERIES

## STANDARD RECOVERY DIODES

## Hockey Puk Version


### Features

- Wide current range
- High voltage ratings up to 4000V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style B-44 (R-PUK)

4450A

### Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications

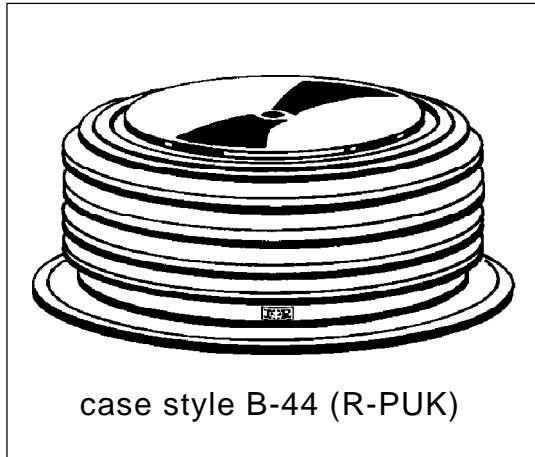

### Major Ratings and Characteristics

Parameters	SD4000C..R	Units
$I_{F(AV)}$	4450	A
@ $T_{hs}$	55	°C
$I_{F(RMS)}$	7700	A
@ $T_{hs}$	25	°C
$I_{FSM}$	57300	A
@ 50Hz	57300	A
@ 60Hz	60000	A
$I^2t$	16430	KA <sup>2</sup> s
@ 50Hz	16430	KA <sup>2</sup> s
@ 60Hz	15000	KA <sup>2</sup> s
$V_{RRM}$ range	3000 to 4000	V
$T_J$	- 40 to 150	°C

## ELECTRICAL SPECIFICATIONS

### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = 150^\circ C$ mA
SD4000C..R	30	3000	3100	100
	34	3400	3500	
	38	3800	3900	
	40	4000	4100	

### Forward Conduction

Parameter	SD4000C..R	Units	Conditions			
$I_{F(AV)}$ @ Heatsink temperature	4450 (2200)	A	180° conduction, half sine wave Double side (single side) cooled			
	55 (85)	°C				
$I_{F(RMS)}$	7700	A	@ 25°C heatsink temperature double side cooled			
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	57300	A	$t = 10ms$	No voltage reapplied	Sinusoidal halfwave, Initial $T_J = T_J$ max.	
	60000		$t = 8.3ms$			
	48200		$t = 10ms$	100% $V_{RRM}$ reapplied		
	50470		$t = 8.3ms$	reapplied		
$I^2t$ Maximum $I^2t$ for fusing	16430	KA <sup>2</sup> s	$t = 10ms$	No voltage reapplied	Initial $T_J = T_J$ max.	
	15000		$t = 8.3ms$			
	11615		$t = 10ms$	100% $V_{RRM}$ reapplied		
	10605		$t = 8.3ms$	reapplied		
$I^2\sqrt{t}$	164300	KA <sup>2</sup> /s	$t = 0.1$ to 10ms, no voltage reapplied			
$V_{F(TO)1}$ Low level value of threshold voltage	0.830	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$V_{F(TO)2}$ High level value of threshold voltage	1.112		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$r_{f1}$ Low level value of forward slope resistance	0.101	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$r_{f2}$ High level value of forward slope resistance	0.071		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.			
$V_{FM}$	1.44	V	$I_{pk} = 6000A$ , $T_J = T_J$ max, $t_p = 10ms$ sinusoidal wave			

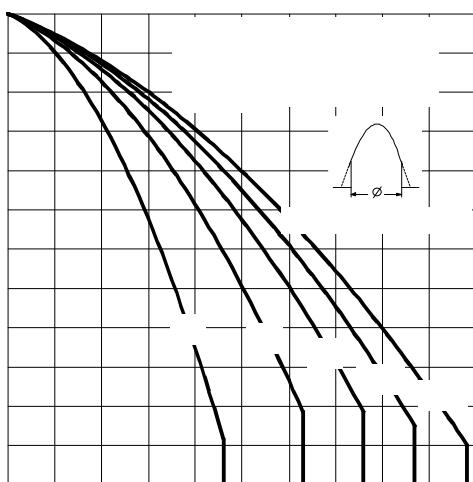


Fig. 3 - Current Ratings Characteristics

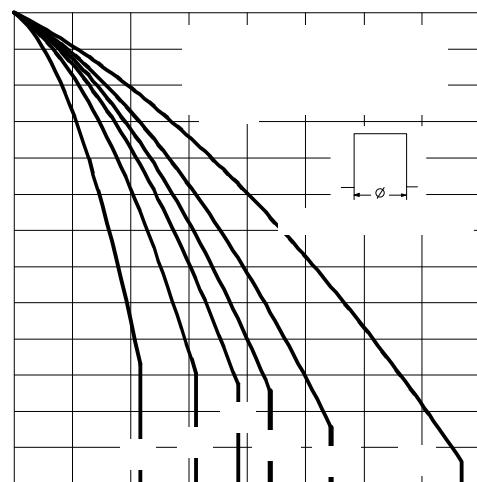


Fig. 4 - Current Ratings Characteristics

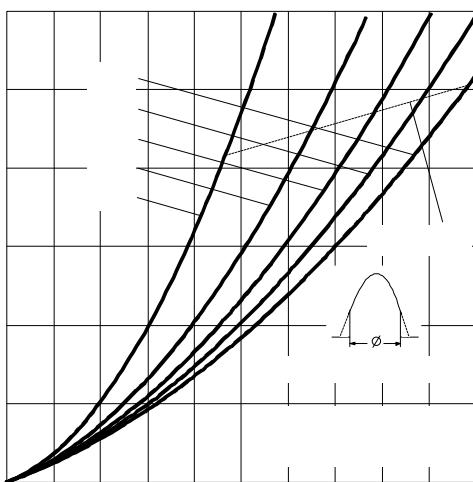


Fig. 5 - Forward Power Loss Characteristics

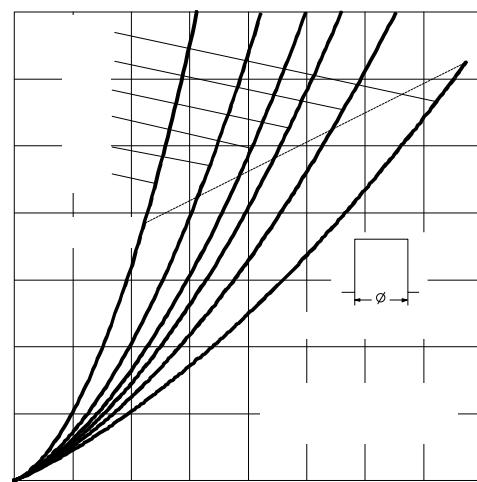


Fig. 6 - Forward Power Loss Characteristics

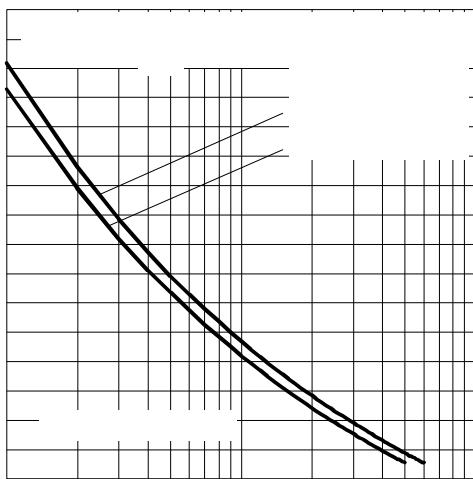


Fig. 7 - Maximum Non-Repetitive Surge Current

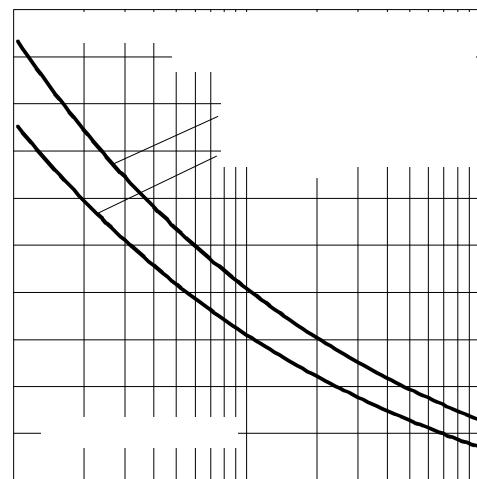


Fig. 8 - Maximum Non-Repetitive Surge Current

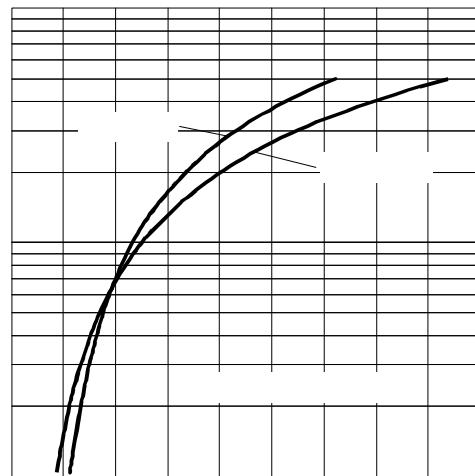


Fig. 9 - Forward Voltage Drop Characteristics

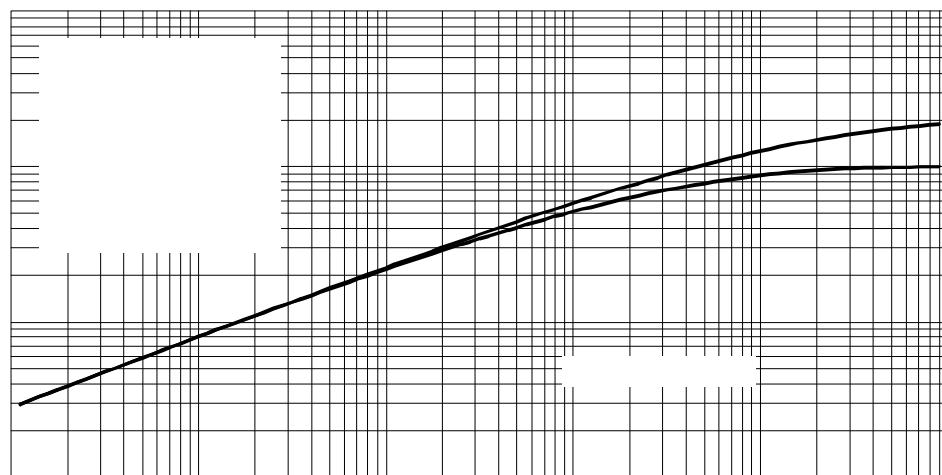


Fig. 10 - Thermal Impedance  $Z_{thJ-hs}$  Characteristics

## Thermal and Mechanical Specifications

Parameter	SD4000C..R	Units	Conditions
$T_J$	Max. junction operating temperature range	-40 to 150	$^{\circ}\text{C}$
$T_{\text{stg}}$	Max. storage temperature range	-55 to 200	
$R_{\text{thJ-hs}}$	Max. thermal resistance, junction to heatsink	0.02 0.01	K/W DC operation single side cooled DC operation double side cooled
F	Mounting force, $\pm 10\%$	39200 (4000)	
wt	Approximate weight	1590	g
Case style	B-44 (R-PUK)	See Outline Table	

 $\Delta R_{\text{thJ-hs}}$  Conduction(The following table shows the increment of thermal resistance  $R_{\text{thJ-hs}}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.0009	0.0010	0.0006	0.0006	K/W	$T_J = T_{\text{J max.}}$
120°	0.0010	0.0011	0.0010	0.0010		
90°	0.0013	0.0013	0.0014	0.0014		
60°	0.0019	0.0019	0.0020	0.0020		
30°	0.0033	0.0033	0.0034	0.0034		

## Ordering Information Table

Device Code	SD	400	0	C	40	R	
	1	2	3	4	5	6	
1	- Diode						
2	- Essential part number						
3	- 0 = Standard recovery						
4	- C = Ceramic Puk						
5	- Voltage code: code x 100 = $V_{\text{RRM}}$ (see Voltage Ratings Table)						
6	- R = Puk Case B-44 (R-PUK)						

## Outline Table

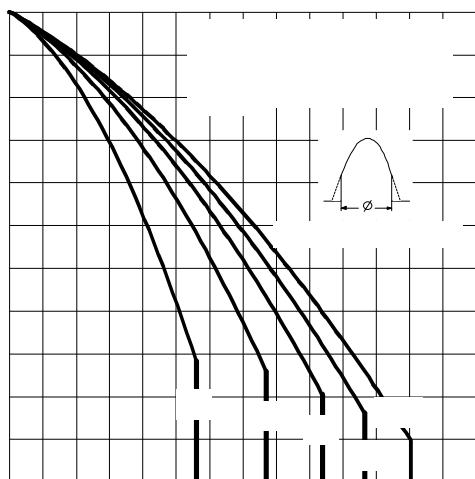
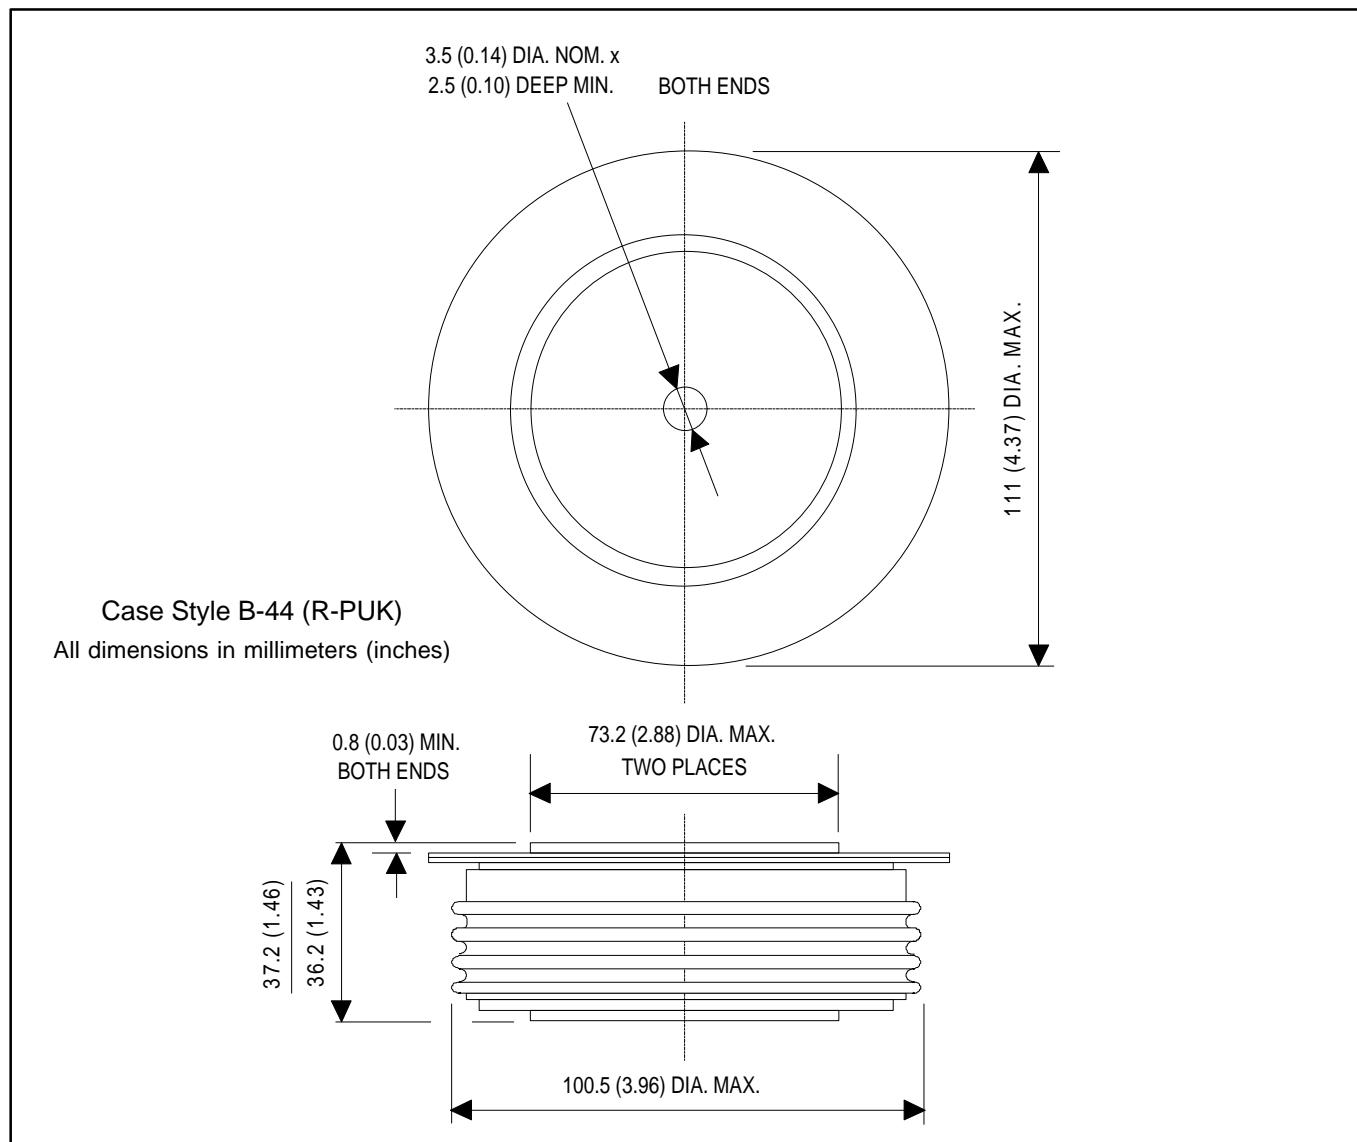


Fig. 1 - Current Ratings Characteristics

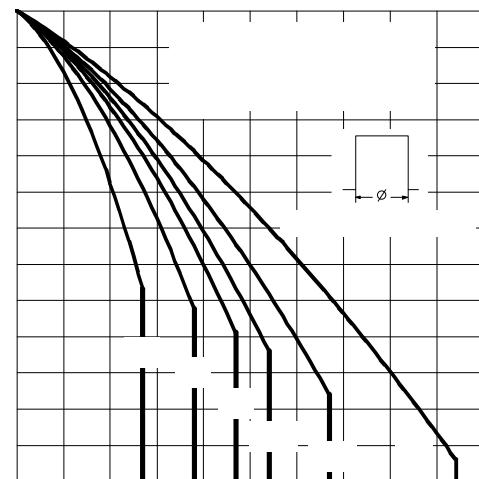


Fig. 2 - Current Ratings Characteristics