

CD players, CD-ROM laser diode

RLD78MYA1

Though it is an open type package, by using a metal cap, pressing structure correspondence and protection of a laser element are enabled, and reliability is secured.


●Applications

Compact disc players
CD-ROM

●Features

- 1) $\phi 5.6$ metal shell type open package.
- 2) A laser element is protected by using a metal cap.
- 3) Interchangeability reservation with $\phi 5.6$ metal package of an industry standard.

●External dimensions (Units : mm)

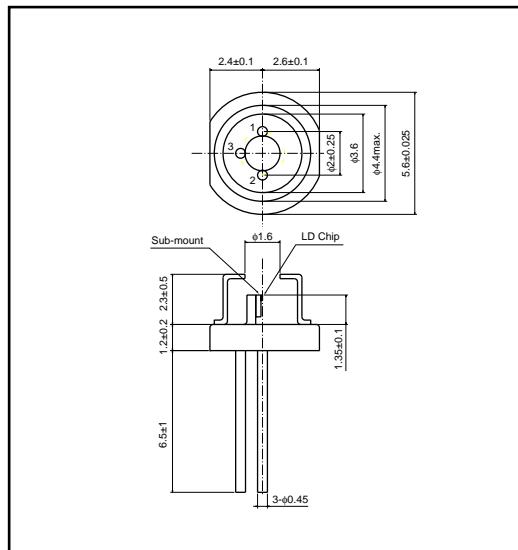

●Absolute maximum ratings ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Output	P_o	5	mW
Reverse voltage	Laser	V_R	V
	PIN photodiode	$V_{R(PIN)}$	V
Operating temperature	T_{opr}	-10 to +70	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +85	$^\circ\text{C}$

Laser diodes

● Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I_{th}	—	35	60	mA	—
Operating current	I_{op}	—	45	70	mA	$P_o=3\text{mW}$
Operating voltage	V_{op}	—	1.9	2.3	V	$P_o=3\text{mW}$
Differential efficiency	η	0.1	0.25	0.6	mW/mA	$\frac{2\text{mW}}{I(3\text{mW})-I(1\text{mW})}$
Monitor current	I_m	0.05	0.15	0.3	mA	$P_o=3\text{mW}, V_{R(PIN)}=15\text{V}$
Parallel divergence angle	$\theta_{//}^*$	8	11	15	deg	$P_o=3\text{mW}$
Perpendicular divergence angle	θ_{\perp}^*	20	37	45	deg	
Parallel deviation angle	$\Delta\phi_{//}$	—	—	± 2	deg	
Perpendicular deviation angle	$\Delta\phi_{\perp}$	—	—	± 3	deg	
Emission point accuracy	ΔX ΔY ΔZ	—	—	± 100	μm	—
Peak emission wavelength	λ	770	785	810	nm	$P_o=3\text{mW}$
Signal-to-noise ratio	S / N	60	—	—	dB	$f=720\text{kHz}, \Delta f=10\text{kHz}$

* $\theta_{//}$ and θ_{\perp} are defined as the angle within which the intensity is 50% of the peak value.

● Electrical and optical characteristic curves

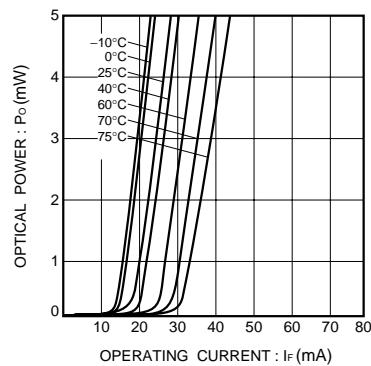


Fig.1 Optical output vs.operating current

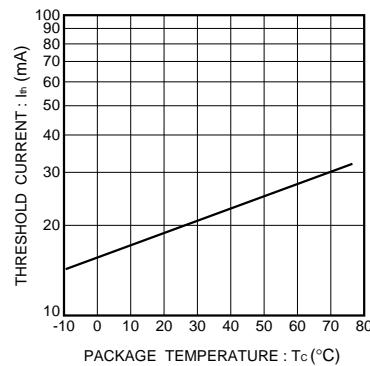


Fig.2 Dependence of threshold current on temperature

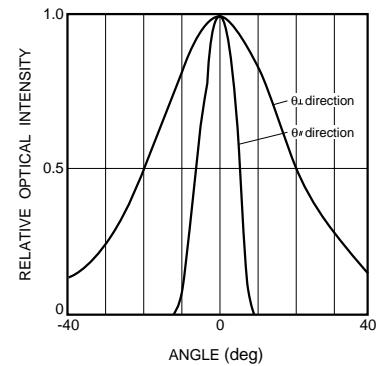


Fig.3 Far field pattern

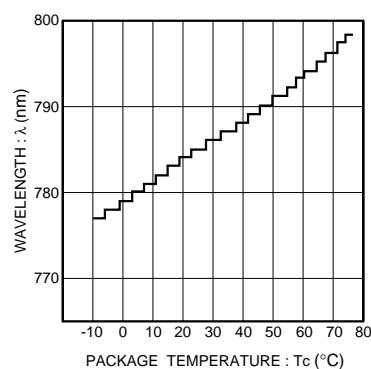


Fig.4 Dependence of wavelength on temperature

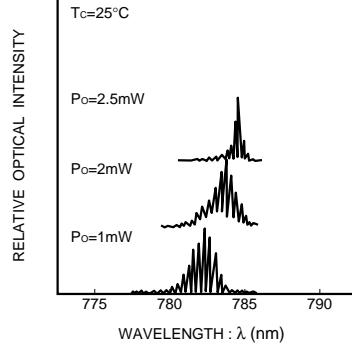


Fig.5 Dependence of emission spectrum on optical output

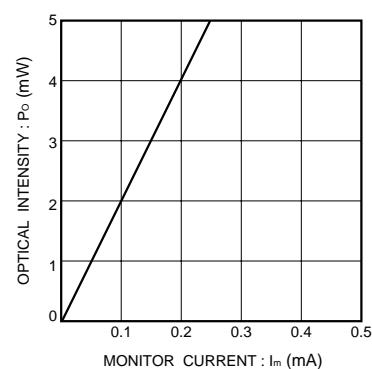


Fig.6 Monitor current vs.optical output

Laser diodes

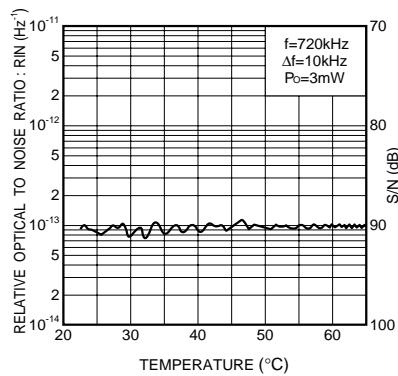


Fig.7 Temperature dependence of noise

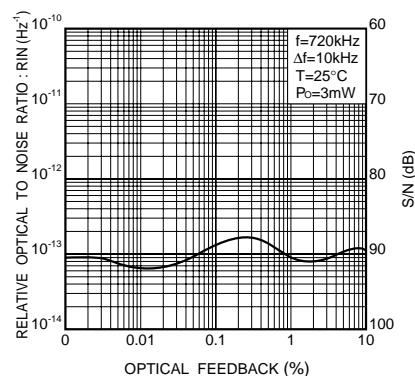


Fig.8 Dependence of noise on optical feedback

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.