

SAW Filter 869.60MHz
Part No: MP05051

Model: TA1457A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device

1. Input Power Level: 10dBm
2. DC Voltage: 6V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	869.6	-
3dB BW	MHz	-	2.0	-
Minimum insertion loss IL(min)				
Exclude loss in matching elements *1)	dB	-	2.4	3.4
Incl. loss of matching elements (Q = 91) *2)	dB	-	2.7	3.7
Passband (relative to IL min) *1)				
869.10 ~ 870.1MHz	dB	-	0.4	3.0
Attenuation (relative to IL min) *1)				
15.00 ~ 785.00MHz	dB	45	52	-
785.00 ~ 850.00MHz	dB	38	46	-
850.00 ~ 858.00MHz	dB	36	42	-
858.00 ~ 867.00MHz	dB	16	26	-
873.00 ~ 878.00MHz	dB	16	23	-
878.00 ~ 896.00MHz	dB	20	26	-
896.00 ~ 912.00MHz	dB	36	42	-
912.00 ~ 1000.0MHz	dB	39	45	-
1000.0 ~ 2000.0MHz	dB	40	46	-
2000.0 ~ 2500.0MHz	dB	55	72	-
Impedance at Fc, Input *1) $Z_{IN} = R_{IN} // C_{IN} Z_S$	Ω	568Ω//1.12pF		
Impedance at Fc, Output *1) $Z_{OUT} = R_{OUT} // C_{OUT} Z_L$	Ω	568Ω//1.12pF		

*1). The matching circuit is ideal by simulation.

*2). The matching circuit is real by actual passive components.



0805 Coilcraft CS series chip conductor is used for inductor.

0402 muRata GRM series is used for capacitor.

SAW Filter 869.60MHz
Part No: MP05051

Model: TA1457A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:

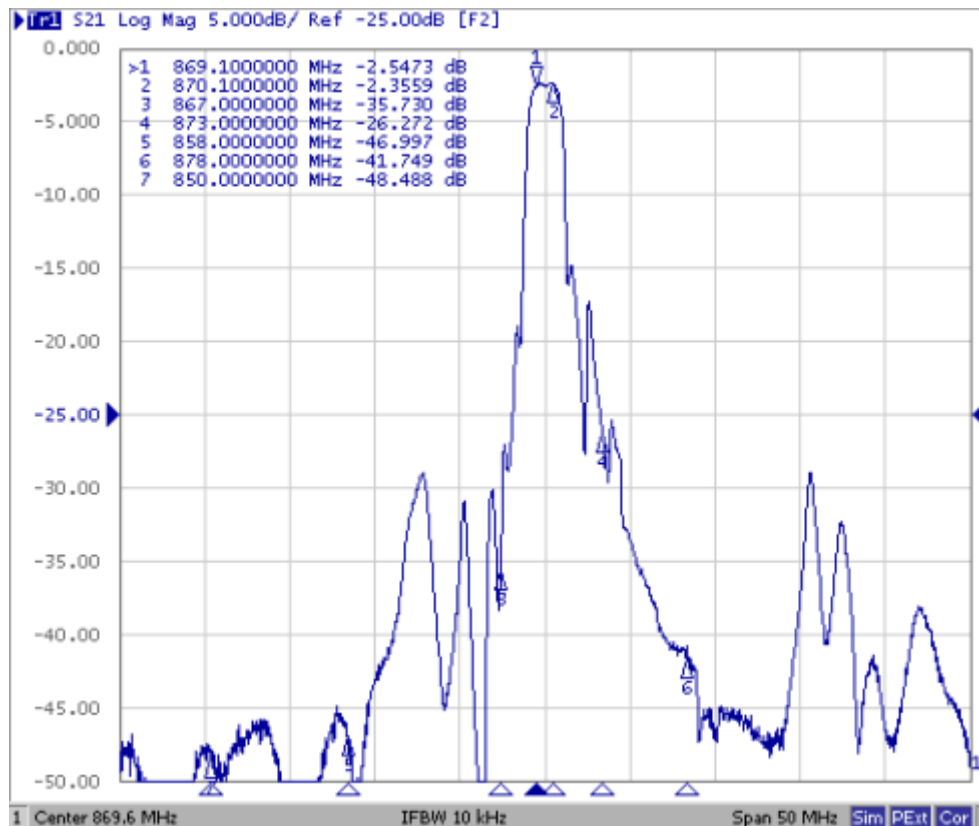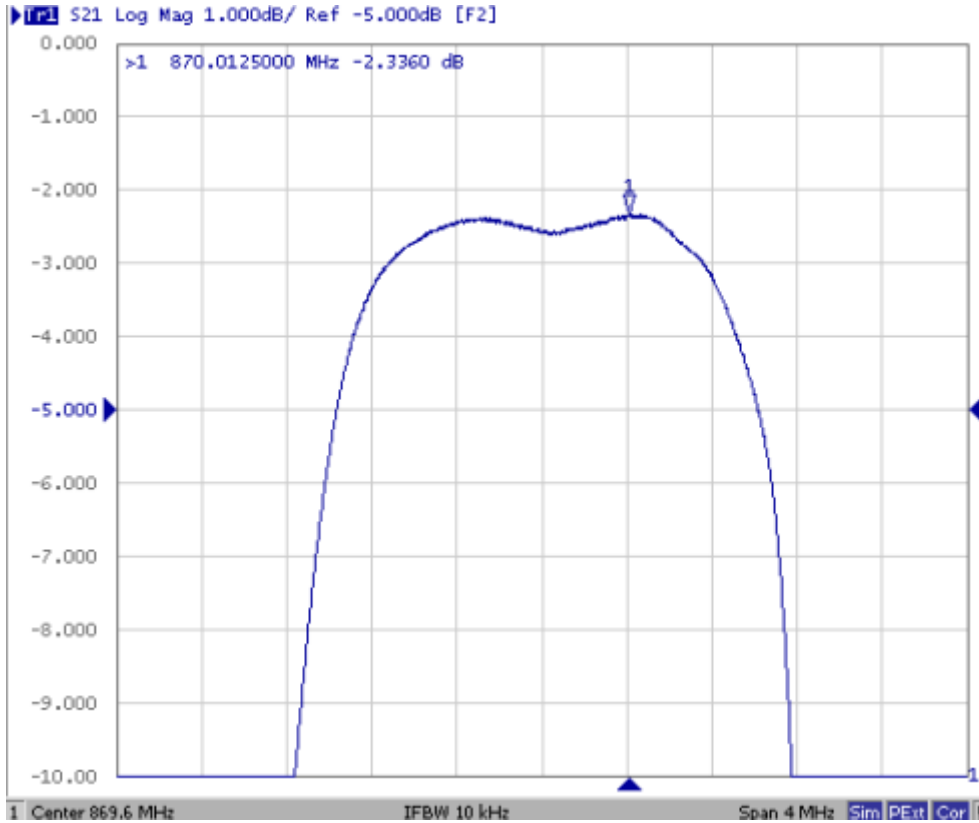


SAW Filter 869.60MHz
Part No: MP05051

Model: TA1457A
Rev No: 1



D. MEASUREMENT CIRCUIT:

The matching circuit is ideal by simulation

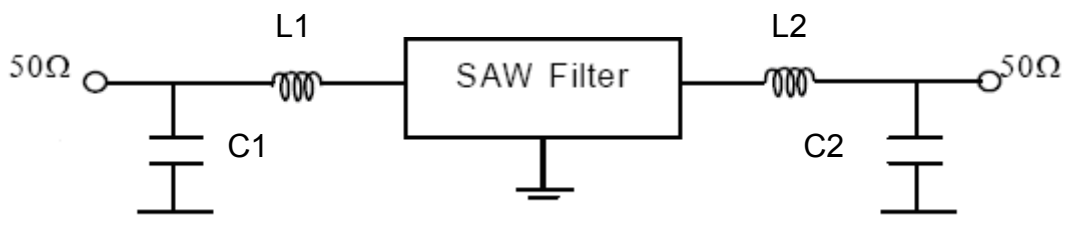


L1: 30nH, L2: 30nH (Ideal value)
 C1: 2pF, C2: 2pF (Ideal value)


SAW Filter 869.60MHz
Part No: MP05051

Model: TA1457A
Rev No: 1

E. OUTLINE DRAWING:

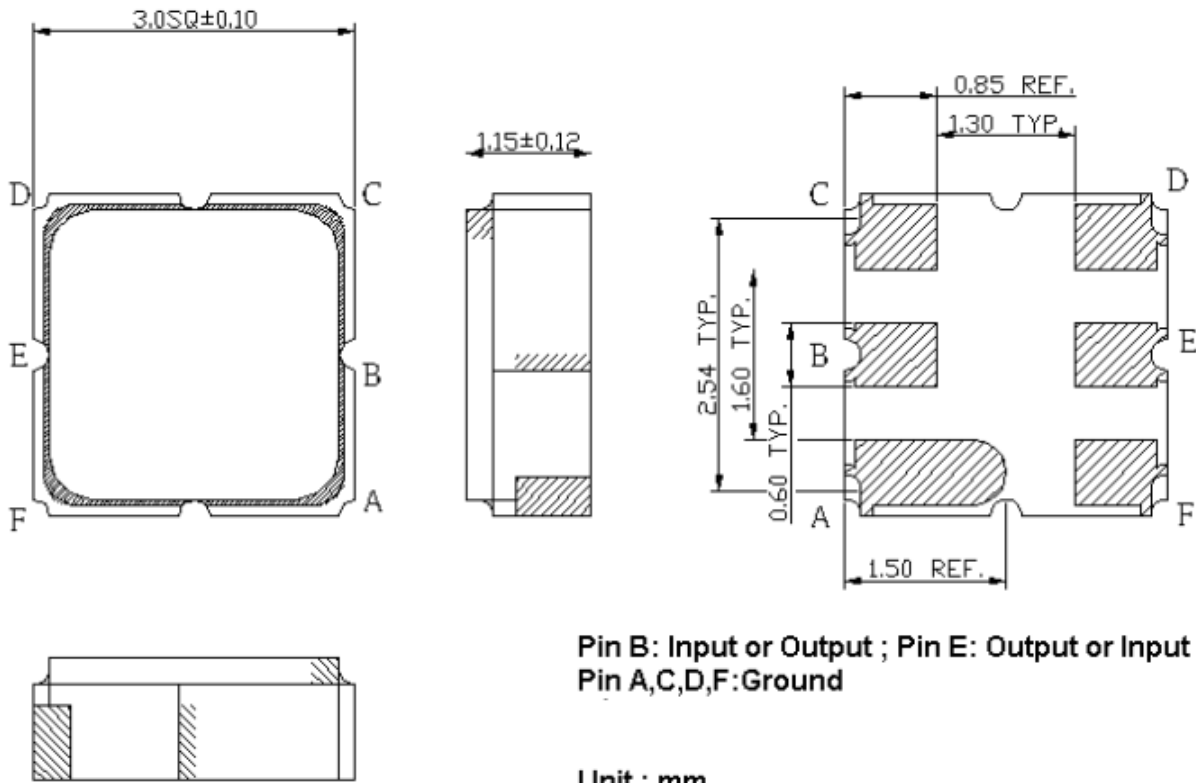

F. PCB FOOTPRINT:

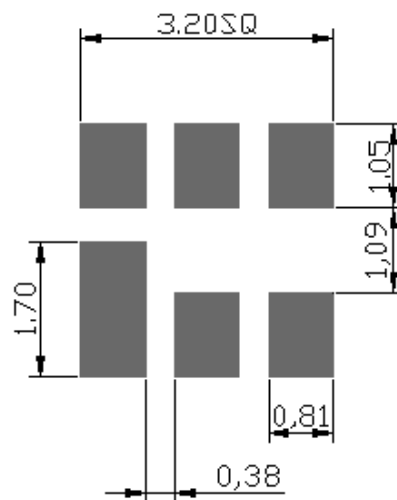


SAW Filter 869.60MHz
Part No: MP05051


Model: TA1457A
Rev No: 1

G. PACKING:

1. Reel Dimension

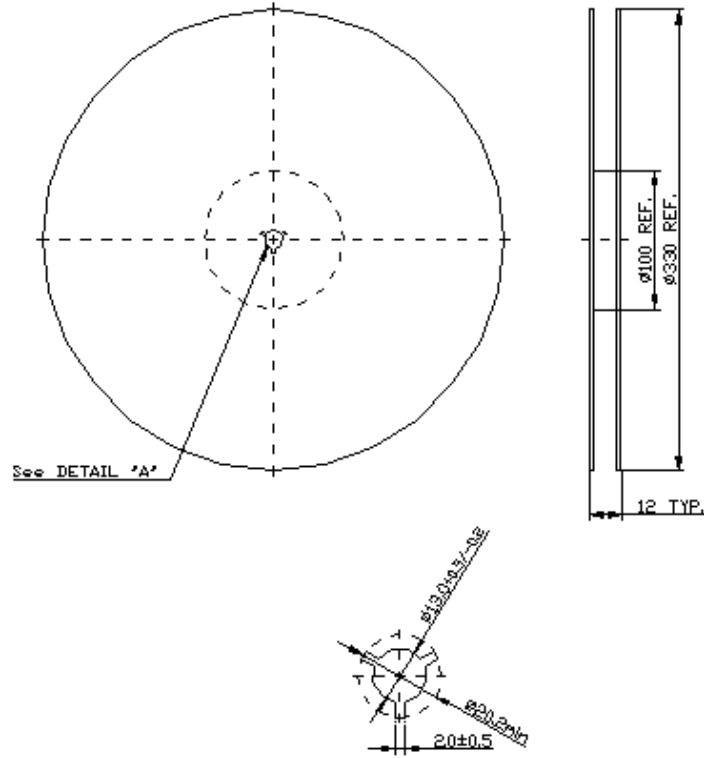

2. Tape Dimension

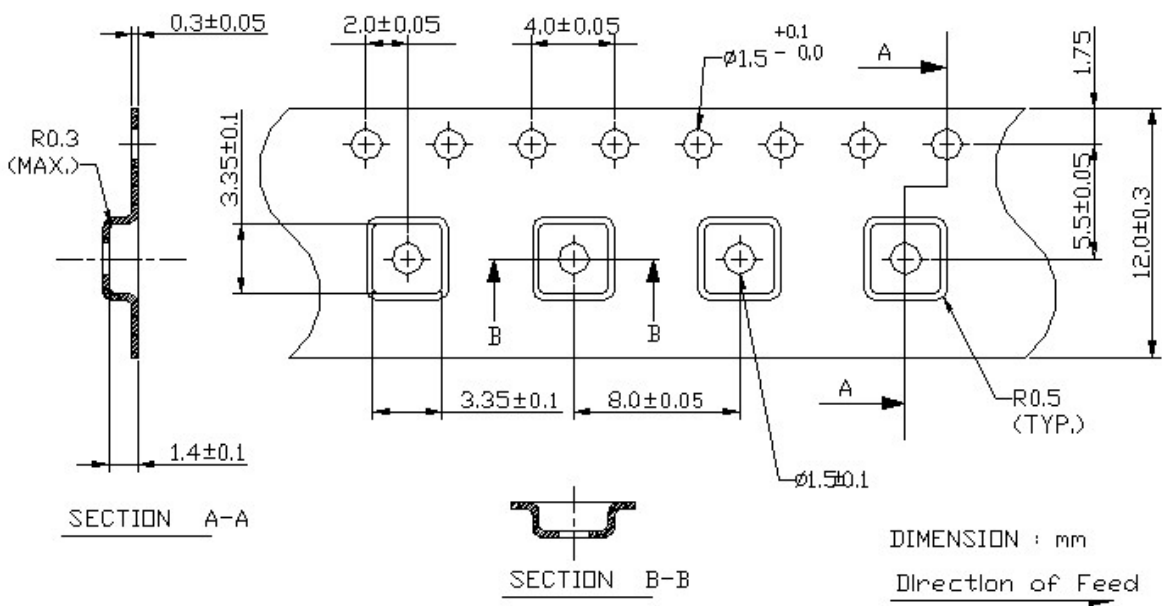

SAW Filter 869.60MHz
Part No: MP05051

Model: TA1457A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

