
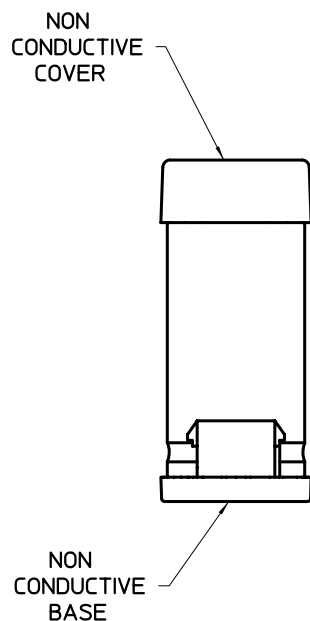


VICOR CONFIDENTIAL


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION		DATE	APPROVED
01	RELEASED PER E980365	DPK	9/14/98	RCM
02	REVSD- E980451	RCM	12/2/98	DPK
03	REVSD PER E990386	AK	9/14/99	RCM
04	REVSD PER E990450	RCM	3/6/00	DPK

VICOR HUB PART NO.	MATING CONNECTOR		
	ORDER FROM:		ORDER FROM:
	AMP		VICOR
	HOUSING (QTY 1)	SOCKETS (QTY 3)	HOUSING/SKT KIT (QTY 1)
HUB2700-S	770018-1	193842-1	21394
HUB3300-S	770018-1	193842-1	21394

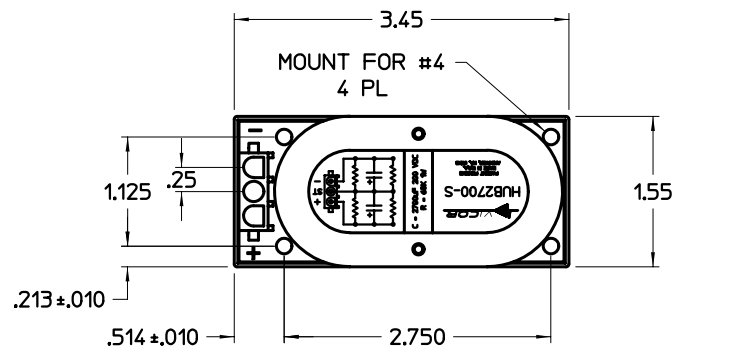

AMP
CONNECTOR
194017-1

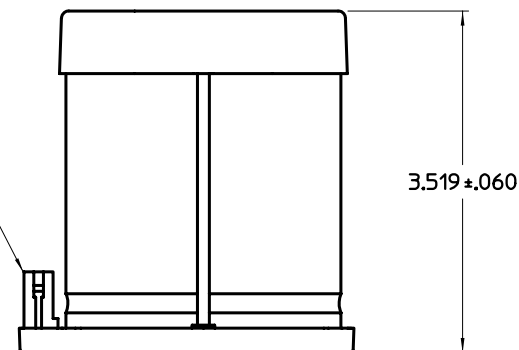

AT +105°C, 120HZ UNLESS OTHERWISE NOTED						
ITEM			CHARACTERISTICS			
OPERATING TEMPERATURE			-25 to +105°C			
CAPACITANCE TOLERANCE @ +20°C			±20%			
			AMBIENT TEMPERATURE (°C)			
			+45	+60	+70	+85 +105
RIPPLE CURRENT MULTIPLIER			2.64	2.23	2.12	1.73 1.00
DISSIPATION FACTOR @ +20°C			0.1			
RATED VOLTAGE (WVDC)			200			
CAPACITANCE VALUE (C1, C2 EA. uF)			HUB2700-S=2700/HUB3300-S=3300			
MAXIMUM ESR (OHMS) @ +20°C			HUB2700-S=0.050/HUB3300-S=.075			
MAXIMUM RIPPLE CURRENT (A rms)			HUB2700-S=4.80/HUB3300-S=4.74			

DRAWN BY D.CYNAR		DATE 4/9/98		VICOR	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES X.XX ±.01 X.XX ±.005 X.XX ±.01		THIRD ANGLE PROJECTION		OUTLINE DRAWING, HUB2700-S/3300-S	
DO NOT SCALE DRAWING		SIZE C	FSCH NO. 67131	DWG NO. 18696	REV 04
		SCALE FULL	SHEET 1 OF 1		