

TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED TYPE (PCT PROCESS)

# 2SC2552

SWITCHING REGULATOR AND HIGH VOLTAGE SWITCHING APPLICATIONS.

INDUSTRIAL APPLICATIONS


Unit in mm

HIGH SPEED DC-DC CONVERTER APPLICATIONS.

- Excellent Switching Times  
:  $t_r = 1.0\mu s$  (Max.)  $t_f = 1.0\mu s$  (Max.) at  $I_C = 0.8A$
- High Collector Breakdown Voltage :  $V_{CEO} = 400V$

MAXIMUM RATINGS ( $T_a = 25^\circ C$ )


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	500	V
Collector-Emitter Voltage	$V_{CEO}$	400	V
Emitter-Base Voltage	$V_{EBO}$	7	V
Collector Current	$I_C$	2	A
Base Current	$I_B$	0.5	A
Collector Power Dissipation	$P_C$	$T_a = 25^\circ C$	1.5
		$T_c = 25^\circ C$	20
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55~150	$^\circ C$

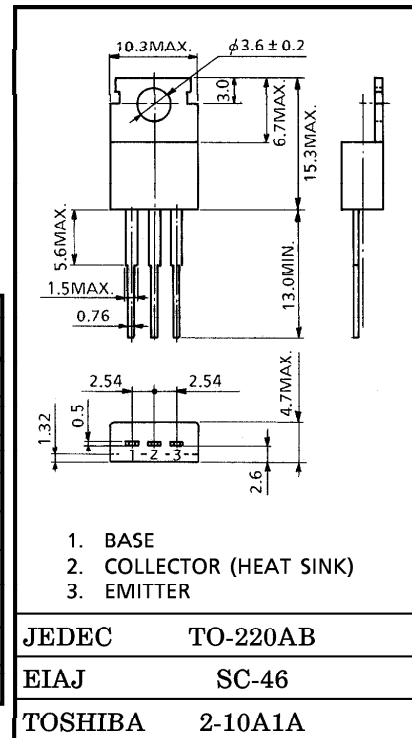

Weight : 1.9g  
Mounting kit No. AC75

ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ C$ )


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = 400V, I_E = 0$	—	—	100	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = 7V, I_C = 0$	—	—	1	mA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1mA, I_E = 0$	500	—	—	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	400	—	—	V
DC Current Gain	$h_{FE(1)}$	$V_{CE} = 5V, I_C = 0.1A$	20	—	—	
	$h_{FE(2)}$	$V_{CE} = 5V, I_C = 1A$	8	—	—	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	—	—	1.0	V
	Base-Emitter	$V_{BE(sat)}$	—	—	1.5	
Switching Time	Turn-on Time	$t_r$	—	—	1.0	$\mu s$
	Storage Time	$t_{stg}$	—	—	2.5	
	Fall Time	$t_f$	$I_{B1} = -I_{B2} = 0.08A$ DUTY CYCLE $\leq 1\%$	—	—	

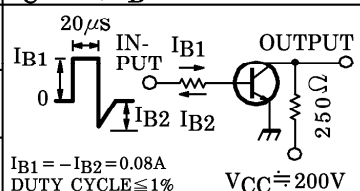


961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.


SWITCHING CHARACTERISTICS

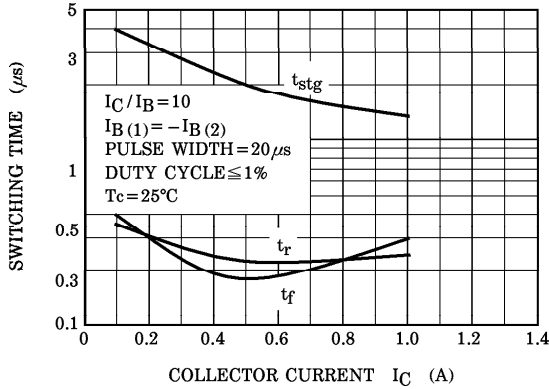


$I_C - V_{CE}$

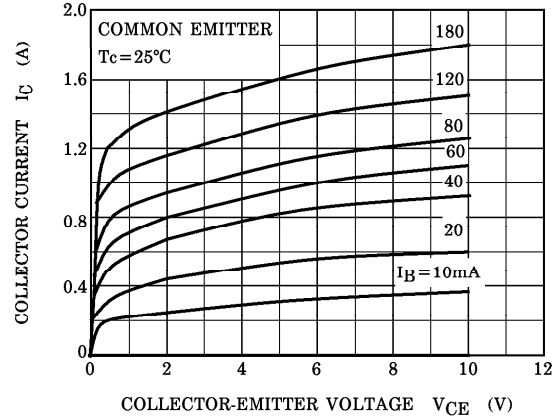


$h_{FE} - I_C$

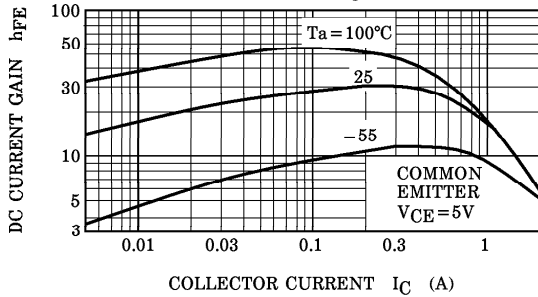



$V_{CE(sat)} - I_C$

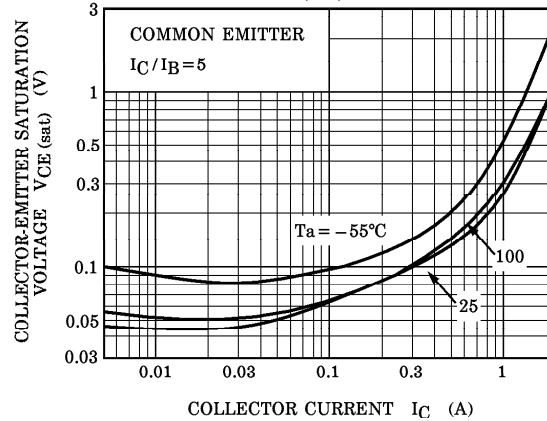

$V_{BE(sat)} - I_C$

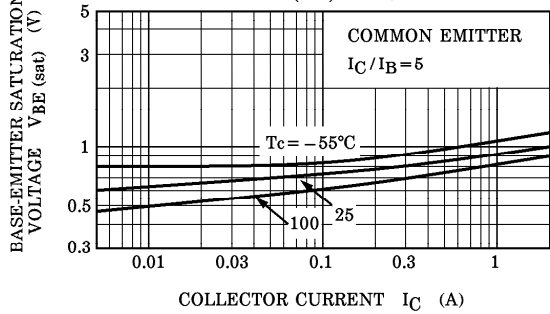

SAFE OPERATING AREA

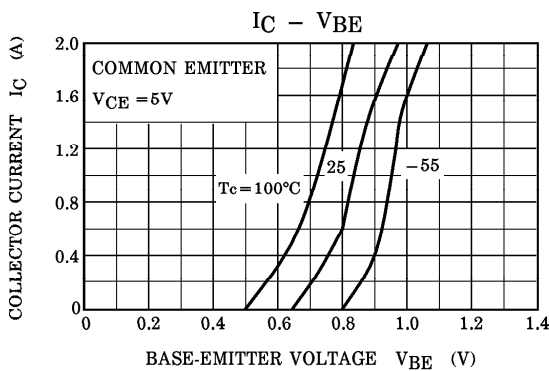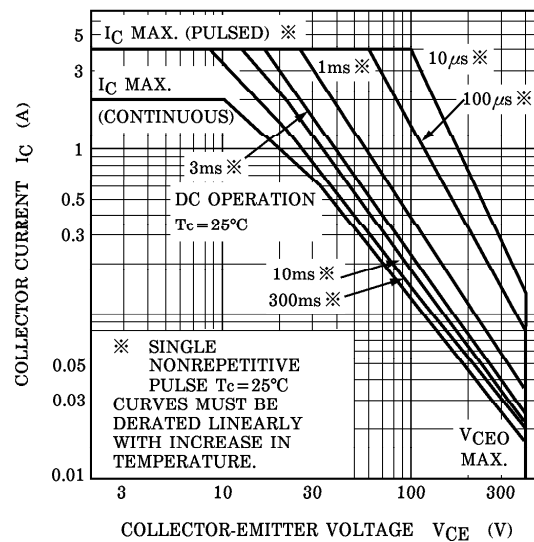

961001EAA2'

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.  
 ● The information contained herein is subject to change without notice.

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.