**Preferred Device** 

# POWERTAP™ II SWITCHMODE™ Power Rectifier

The SWITCHMODE Power Rectifier uses the Schottky Barrier principle with a platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction —
   May Be Paralleled for Higher Current Output
- Guardring for Stress Protection
- Low Forward Voltage Drop
- 150°C Operating Junction Temperature
- Recyclable Epoxy
- Guaranteed Reverse Avalanche Energy Capability
- Improved Mechanical Ratings

#### **Mechanical Characteristics**

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25–40 lb-in max
- Base Plate Torques:
  - See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: B60035L

#### **MAXIMUM RATINGS**


Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	35	V
Average Rectified Forward Current (At Rated V <sub>R</sub> , T <sub>C</sub> = 100°C) Per Leg Per Device	I <sub>F(AV)</sub>	300 600	A
Peak Repetitive Forward Current, (At Rated $V_R$ , Square Wave, 20 kHz, $T_C = 100^{\circ}C$ )	I <sub>FRM</sub>	300	A
Non–Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I <sub>FSM</sub>	4000	А
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I <sub>RRM</sub>	2.0	А
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	°C
Operating Junction Temperature	TJ	-55 to +150	°C
Voltage Rate of Change (Rated V <sub>R</sub> )	dv/dt	10,000	V/μs




# ON Semiconductor™

http://onsemi.com


# LOW V<sub>F</sub> SCHOTTKY BARRIER RECTIFIER 600 AMPERES 35 VOLTS





POWERTAP II CASE 357C PLASTIC

## MARKING DIAGRAM



## ORDERING INFORMATION

Device	Package	Shipping	
MBRP60035CTL	POWERTAP II	25 Units/Tray	

**Preferred** devices are recommended choices for future use and best overall value.

# THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal Resistance — Junction to Case	$R_{ heta JC}$	0.4	°C/W
ELECTRICAL CHARACTERISTICS			
Maximum Instantaneous Forward Voltage (Note 1.) ( $i_F = 300 \text{ Amps}, T_C = +25^{\circ}\text{C}$ ) ( $i_F = 300 \text{ Amps}, T_C = +100^{\circ}\text{C}$ )	V <sub>F</sub>	0.57 0.50	Volts
Maximum Instantaneous Reverse Current (Note 1.) (Rated dc Voltage, T <sub>C</sub> = +25°C)	I <sub>R</sub>	3.0	mA

<sup>1.</sup> Pulse Test: Pulse Width = 300  $\mu s$ , Duty Cycle  $\leq$  2%.


(Rated dc Voltage,  $T_C = +100^{\circ}C$ )

# **MAXIMUM MECHANICAL RATINGS**

Terminal Penetration:	0.235 max
Terminal Torque:	25-40 in-lb max
Mounting Torque — Outside Holes:	30–40 in-lb max
Mounting Torque — Center Hole:	8–10 in-lb max
Seating Plane Flatness	1 mil per in. (between mounting holes)

# POWERTAP MECHANICAL DATA APPLIES OVER OPERATING TEMPERATURE

250




Note: While the POWERTAP is capable of sustaining these vertical and levered tensions, the intimate contact between POWERTAP and heat sink may be lost. This could lead to thermal runaway. The use of very flexible leads is recommended for the anode connections. Use of thermal grease is highly recommended.

# **MOUNTING PROCEDURE**

The POWERTAP package requires special mounting considerations because of the long longitudinal axis of the copper heat sink. It is important to follow the proper tightening sequence to avoid warping the heat sink, which can reduce thermal contact between the POWERTAP and heat sink.


# STEP 1:

Locate the POWERTAP on the heat sink and start mounting bolts into the threads by hand (2 or 3 turns).




#### STEP 2:

Finger tighten the center bolt. The bolt may catch on the threads of the heat sink so it is important to make sure the face of the bolt or washer is in contact with the surface of the POWERTAP.




#### **STEP 3:**

Tighten each of the end bolts between 5 to 10 in-lb.




## **STEP 4:**

Tighten the center bolt between 8 to 10 in-lb.




# **STEP 5:**

Finally, tighten the end bolts between 30 to 40 in-lb.



#### PACKAGE DIMENSIONS

CASE 357C-03 POWERTAP PLASTIC PACKAGE ISSUE E

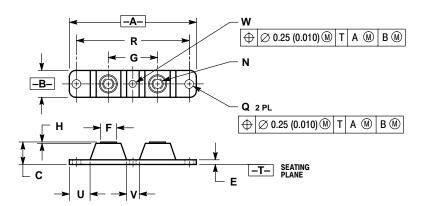

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI
  Y14 5M 1982
- 2. CONTROLLING DIMENSION: INCH.
- 3. TERMINAL PENETRATION: 5.97 (0.235) MAXIMUM.

	INCHES MIL		MILLIM	LIMETERS	
DIM	MIN	MAX	MIN	MAX	
Α	3.450	3.635	87.63	92.33	
В	0.700	0.810	17.78	20.57	
С	0.615	0.640	15.63	16.26	
Е	0.120	0.130	3.05	3.30	
F	0.435	0.445	11.05	11.30	
G	1.370	1.380	34.80	35.05	
Н	0.007	0.030	0.18	0.76	
N	1/4-20	1/4-20UNC-2B		1/4-20UNC-2B	
Q	0.270	0.285	6.86	7.23	
R	3.150	BSC	80.01 BSC		
U	0.600	0.630	15.24	16.00	
٧	0.330	0.375	8.39	9.52	
W	0.170	0.190	4.32	4.82	

POWERTAP and SWITCHMODE are trademarks of Semiconductor Components Industries, LLC.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

#### **PUBLICATION ORDERING INFORMATION**

## NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

**Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

#### N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor - European Support

German Phone: (+1) 303–308–7140 (Mon–Fri 2:30pm to 7:00pm CET)

Email: ONlit-german@hibbertco.com

French Phone: (+1) 303–308–7141 (Mon–Fri 2:00pm to 7:00pm CET)

Email: ONlit-french@hibbertco.com

English Phone: (+1) 303–308–7142 (Mon–Fri 12:00pm to 5:00pm GMT)

Email: ONlit@hibbertco.com

#### EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781

\*Available from Germany, France, Italy, UK, Ireland

# CENTRAL/SOUTH AMERICA:

Spanish Phone: 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)

Email: ONlit-spanish@hibbertco.com

Toll-Free from Mexico: Dial 01-800-288-2872 for Access -

then Dial 866-297-9322

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 1-303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)

Toll Free from Hong Kong & Singapore:

001-800-4422-3781 Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031

Phone: 81–3–5740–2700

Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local

Sales Representative.