


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.



FEATURES

- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT



EQUIVALENT CIRCUIT (TOP VIEW)

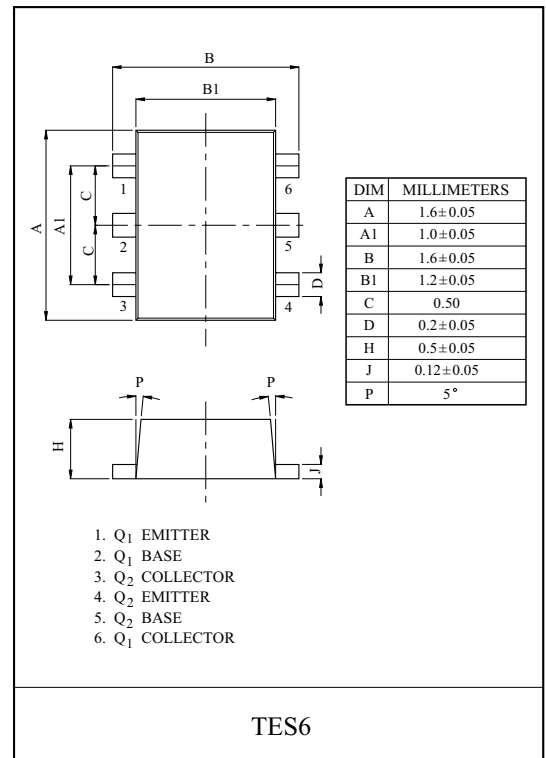

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-100	mA

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector Power Dissipation	P_C^*	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

* Total Rating.


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current	I_{CBO}	$V_{CB}=-50V, I_E=0$	-	-	-100	nA	
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-5V, I_C=0$	-	-	-100	nA	
DC Current Gain	h_{FE}	$V_{CE}=-5V, I_C=-1mA$	120	-	-		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-10mA, I_B=-0.5mA$	-	-0.1	-0.3	V	
Transition Frequency	f_T^*	$V_{CE}=-10V, I_C=-5mA$	-	250	-	MHz	
Input Resistor	KRA760E	R_1		-	4.7	-	kΩ
	KRA761E			-	10	-	
	KRA762E			-	100	-	
	KRA763E			-	22	-	
	KRA764E			-	47	-	

Note : * Characteristic of Transistor Only.

MARK SPEC

TYPE	KRA760E	KRA761E	KRA762E	KRA763E	KRA764E
MARK	PK	PM	PN	PO	PP









KRA760E~KRA764E

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA760E	V _O =-5V V _{IN} =-5V R _L =1k Ω	-	0.2	-	μS
		KRA761E		-	0.065	-	
		KRA762E		-	0.4	-	
		KRA763E		-	0.1	-	
		KRA764E		-	0.15	-	
	Storage Time	KRA760E		-	2.0	-	
		KRA761E		-	1.7	-	
		KRA762E		-	3.0	-	
		KRA763E		-	2.0	-	
		KRA764E		-	1.5	-	
	Fall Time	KRA760E		-	0.3	-	
		KRA761E		-	0.3	-	
		KRA762E		-	1.7	-	
		KRA763E		-	0.8	-	
		KRA764E		-	1.5	-	

KRA760E~KRA764E

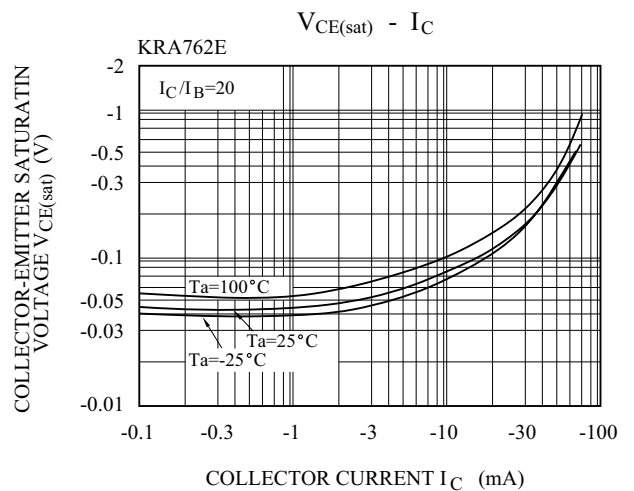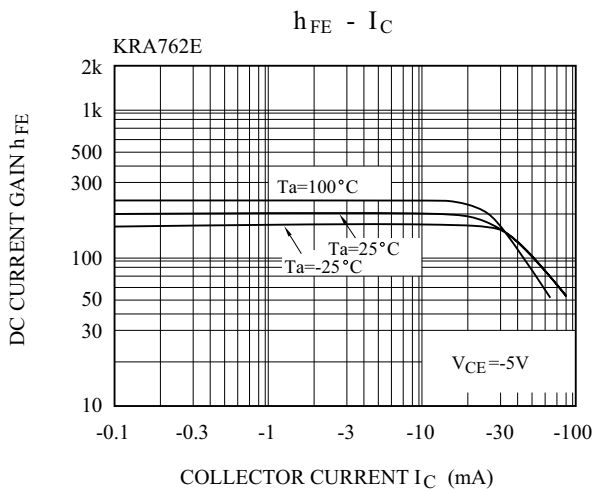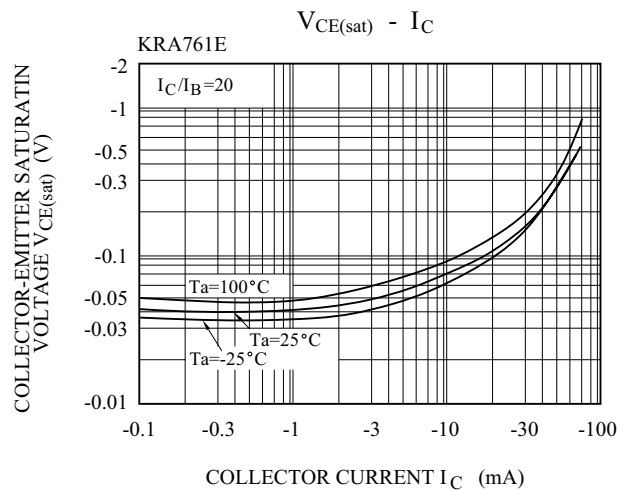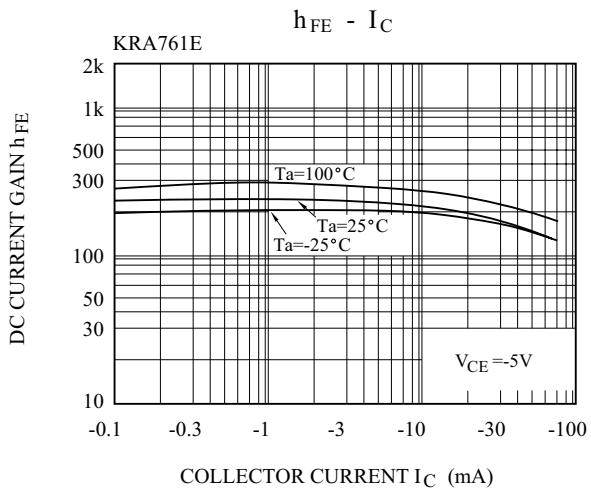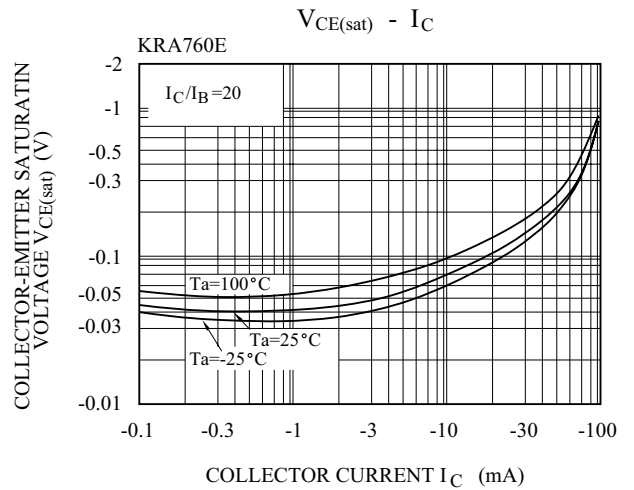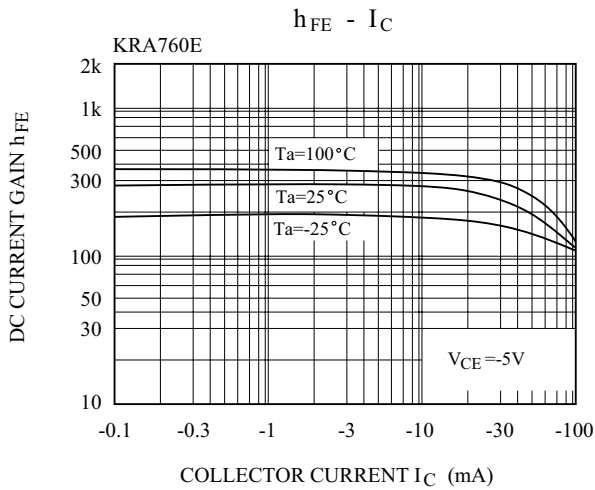

KRA760E~KRA764E

