

TOSHIBA Schottky Barrier Rectifier Stack Trench Schottky Barrier Type


U30FWJ2C53M

Low Forward Voltage Schottky Barrier Type
 Switching Mode Power Supply Application
 Converter&Chopper Application

- Repetitive peak reverse voltage: $V_{FM} = 0.47 \text{ V (max)}$
- Peak forward voltage: $V_{RRM} = 30 \text{ V}$
- Average output rectified current: $I_O = 30 \text{ A}$
- Low switching losses and output noise.
- Power surface mount device for thin flat package.
 “TFP” (Toshiba package name)


Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	30	V
Average output rectified current	I_O	30	A
Peak one cycle surge forward current (non-repetitive, sine wave)	I_{FSM}	300 (50 Hz)	A
		330 (60 Hz)	
Junction temperature	T_j	-40 to 125	°C
Storage temperature range	T_{stg}	-40 to 150	°C

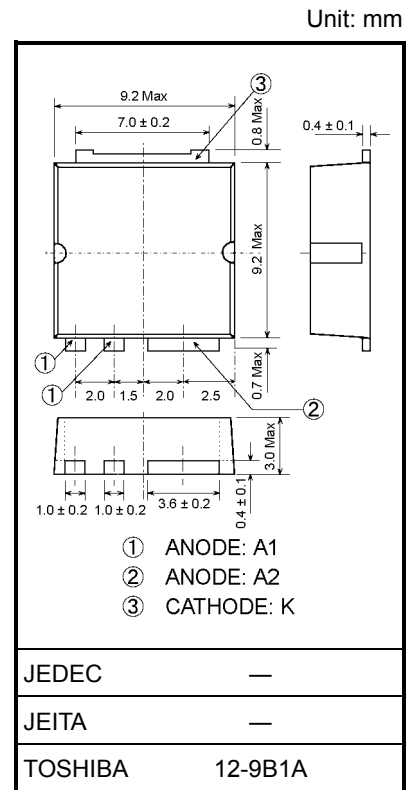

Weight: 0.74 g (typ.)

Polarity



*: Common Terminal

Handling Precaution


Schottky barrier diodes are having large reverse current leakage characteristic compare to other rectifier products. This current leakage and not proper operating temperature or voltage may cause thermal runaway. Please take forward and reverse loss into consideration when you design.

Electrical Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Peak forward voltage	V_{FM}	$I_{FM} = 15 \text{ A}$	—	—	0.47	V
Repetitive peak reverse current	I_{RRM}	$V_{RRM} = 30 \text{ V}$	—	—	15	mA
Junction Capacitance	C_j	$V_R = 10 \text{ V}, f = 1.0 \text{ MHz}$	—	880	—	pF
Thermal resistance	$R_{th(j-c)}$	DC Total, Junction to Case	—	—	1.2	°C/W


Note: V_{FM} , I_{RRM} , C_j : A value of one cell.







Marking





※1	MARK	30FWJ2C	TYPE	U30FWJ2C53M
※2	M			
※3	Lot Number □□ — Month (starting from alphabet A) — Year (last number of the christian era)			

Standard Soldering Pad

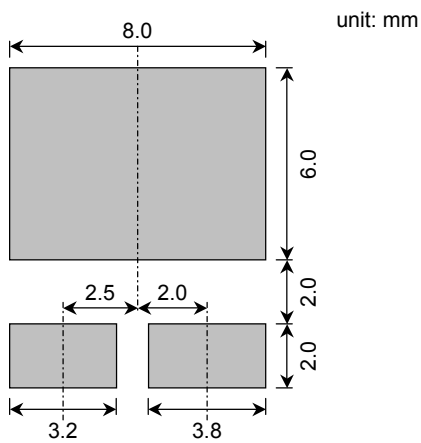

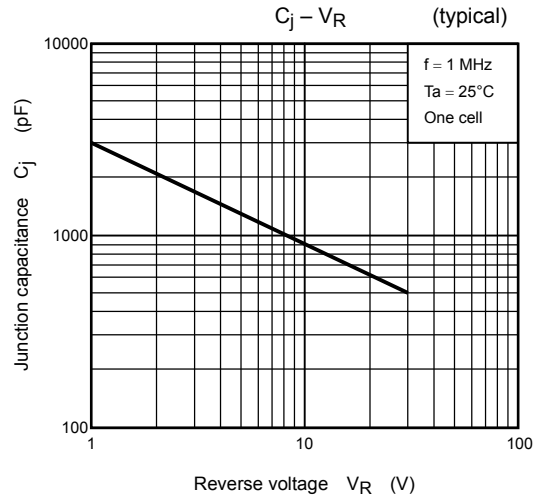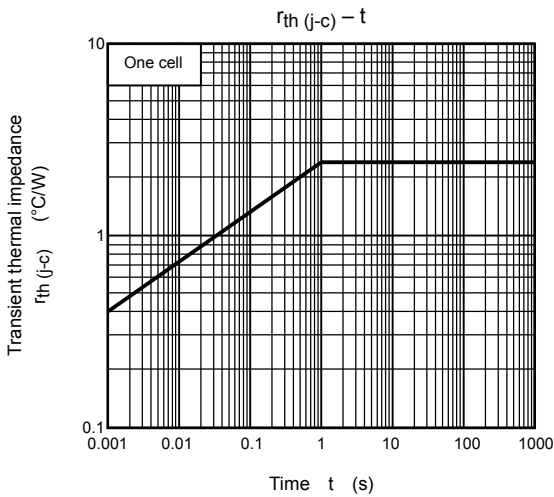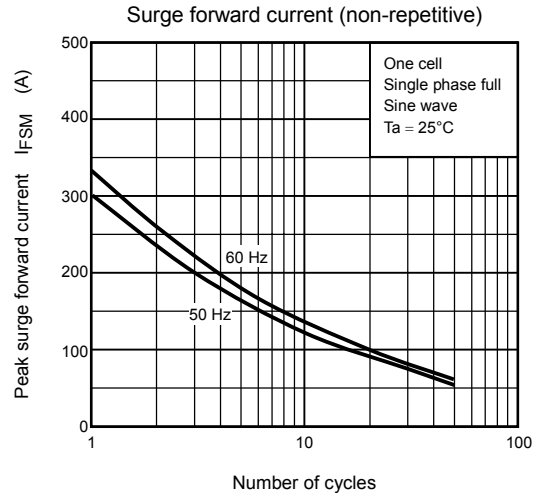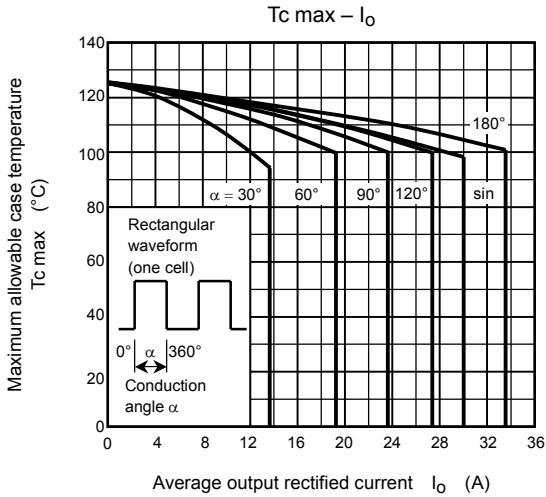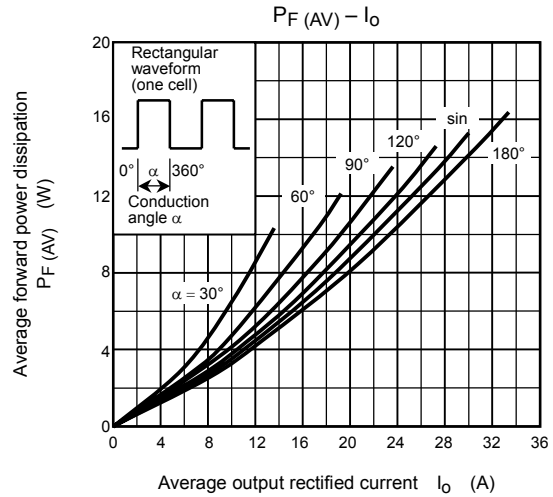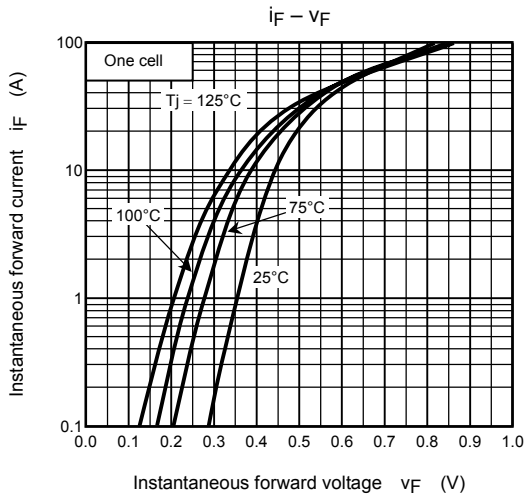

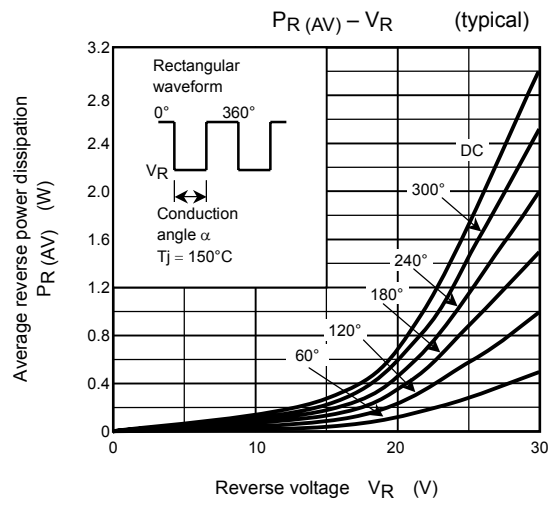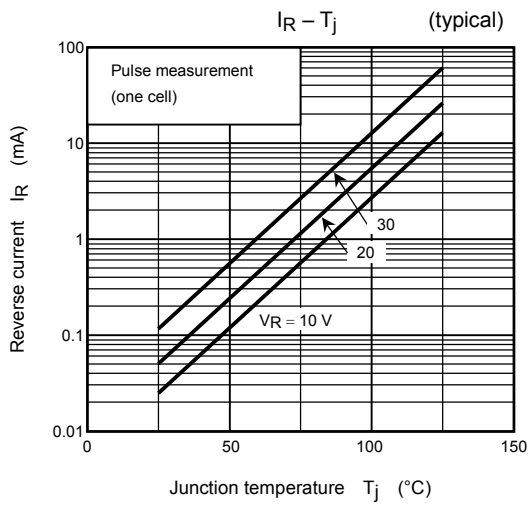

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.