

December 2013

# **FCP104N60F**

# N-Channel SuperFET<sup>®</sup> II FRFET<sup>®</sup> MOSFET 600 V, 37 A, 104 m $\Omega$

#### **Features**


- 650 V @ T<sub>J</sub> = 150°C
- Typ.  $R_{DS(on)} = 91 \text{ m}\Omega$
- Ultra Low Gate Charge (Typ.  $Q_g = 110 \text{ nC}$ )
- Low Effective Output Capacitance (Typ. C<sub>oss(eff.)</sub> = 313 pF)
- · 100% Avalanche Tested
- · RoHS Compliant


# **Applications**

- Lighting
- · Solar Inverter
- · AC-DC Power Supply

# Description

SuperFET® II MOSFET is Fairchild Semiconductor's brand-new high voltage super-junction (SJ) MOSFET family that is utilizing charge balance technology for outstanding low on-resistance and lower gate charge performance. This technology is tailored to minimize conduction loss, provide superior switching performance, dv/dt rate and higher avalanche energy. Consequently, SuperFET II MOSFET is very suitable for the switching power applications such as PFC, server/telecom power, FPD TV power, ATX power and industrial power applications. SuperFET II FR-FET® MOSFET's optimized body diode reverse recovery performance can remove additional component and improve system reliability.





# Absolute Maximum Ratings T<sub>C</sub> = 25°C unless otherwise noted.

Symbol		Parameter		FCP104N60F	Unit	
V <sub>DSS</sub>	Drain to Source Voltage			600	V	
.,	Cata ta Cauraa Maltaga	- DC		±20	V	
$V_{GSS}$	Gate to Source Voltage	- AC	(f > 1Hz)	±30	V	
	Dania Cumant	- Continuous (T <sub>C</sub> = 25°C)		37	^	
ID	Drain Current	- Continuous (T <sub>C</sub> = 100°C)		24	A	
I <sub>DM</sub>	Drain Current	- Pulsed	- Pulsed (Note 1)		Α	
E <sub>AS</sub>	Single Pulsed Avalanche En	ergy	(Note 2)	809	mJ	
I <sub>AR</sub>	Avalanche Current		(Note 1)	6.8	Α	
E <sub>AR</sub>	Repetitive Avalanche Energ	у	(Note 1)	3.57	mJ	
	MOSFET dv/dt			100	1//20	
dv/dt	Peak Diode Recovery dv/dt		(Note 3)	50	V/ns	
n	Davies Dissination	(T <sub>C</sub> = 25°C)		357	W	
$P_{D}$	Power Dissipation	- Derate Above 25°C		2.85	W/°C	
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temp	perature Range		-55 to +150	°C	
T <sub>L</sub>	Maximum Lead Temperature 1/8" from Case for 5 Second	•		300	°C	

### **Thermal Characteristics**

Symbol	Parameter	FCP104N60F	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	0.35	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient ,Max.	62.5	C/VV

# **Package Marking and Ordering Information**

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FCP104N60F	FCP104N60F	TO-220	Tube	N/A	N/A	50 units

# **Electrical Characteristics** $T_C = 25^{\circ}C$ unless otherwise noted.

Symbol	Parameter	lest Conditions	Min.	ıyp.	мах.	Unit
Off Chara	cteristics					
D\/	Drain to Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 10 \text{ mA}, T_J = 25^{\circ}\text{C}$	600	-	-	V
BV <sub>DSS</sub> Drain to Source	Drain to Source Breakdown voltage	$V_{GS} = 0 \text{ V}, I_D = 10 \text{ mA}, T_J = 150^{\circ}\text{C}$	650	-	-	] <b>'</b>
ΔBV <sub>DSS</sub> / ΔT <sub>J</sub>	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> = 10 mA, Referenced to 25°C	-	0.67	-	V/°C
BV <sub>DS</sub>	Drain to Source Avlanche Breakdown Voltage	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 18.5 A	-	700	-	V
1	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 480 V, V <sub>GS</sub> = 0 V	-	-	10	
I <sub>DSS</sub>	Zero Gale vollage Drain Current	$V_{DS} = 480 \text{ V}, T_{C} = 125^{\circ}\text{C}$	-	-	100	μA
I <sub>GSS</sub>	Gate to Body Leakage Current	V <sub>GS</sub> = ±20 V, V <sub>DS</sub> = 0 V	-	-	±100	nA

#### On Characteristics

V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu\text{A}$	3	-	5	V
R <sub>DS(on)</sub>	Static Drain to Source On Resistance	$V_{GS} = 10 \text{ V}, I_D = 18.5 \text{ A}$	-	91	104	mΩ
9 <sub>FS</sub>	Forward Transconductance	$V_{DS} = 20 \text{ V}, I_{D} = 18.5 \text{ A}$	-	33	1	S

# **Dynamic Characteristics**

Input Capacitance	V 05 V V 0 V	- \	4610	6130	pF
Output Capacitance	V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V, f = 1 MHz		3255	4330	pF
Reverse Transfer Capacitance			155	235	pF
Output Capacitance	$V_{DS} = 380 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$	-	74	-	pF
Effective Output Capacitance	V <sub>DS</sub> = 0 V to 480 V, V <sub>GS</sub> = 0 V	-	313	-	pF
Total Gate Charge at 10V	V <sub>DS</sub> = 380 V. I <sub>D</sub> = 18.5 A.	-	110	145	nC
Gate to Source Gate Charge	V <sub>GS</sub> = 10 V	-	24	-	nC
Gate to Drain "Miller" Charge	(Note 4)	-	44	-	nC
Equivalent Series Resistance	f = 1 MHz	-	0.9	-	Ω
	Output Capacitance Reverse Transfer Capacitance Output Capacitance Effective Output Capacitance Total Gate Charge at 10V Gate to Source Gate Charge Gate to Drain "Miller" Charge	Output Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ Reverse Transfer Capacitance $V_{DS} = 380 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ Effective Output Capacitance $V_{DS} = 380 \text{ V}, V_{GS} = 0 \text{ V}$ Total Gate Charge at 10V $V_{DS} = 380 \text{ V}, V_{DS} = 380 \text{ V}, V_{DS} = 18.5 \text{ A}, V_{CS} = 10 \text{ V}$ Gate to Drain "Miller" Charge (Note 4)	Output Capacitance $V_{DS} = 25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ - Output Capacitance $V_{DS} = 380 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ - Effective Output Capacitance $V_{DS} = 0 \text{ V} \text{ to } 480 \text{ V}, V_{GS} = 0 \text{ V}$ - Total Gate Charge at 10V $V_{DS} = 380 \text{ V}, V_{DS} = 380 \text{ V}, V_{DS} = 18.5 \text{ A}, V_{CS} = 10 \text{ V}$ - Gate to Drain "Miller" Charge $V_{CS} = 10 \text{ V}$ -	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$

### **Switching Characteristics**

t <sub>d(on)</sub>	Turn-On Delay Time		-	34	78	ns
t <sub>r</sub>		$V_{DD} = 380 \text{ V}, I_{D} = 18.5 \text{ A},$	/ -	20	50	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{GS}$ = 10 V, $R_{G}$ = 4.7 $\Omega$	-	102	214	ns
t <sub>f</sub>	Turn-Off Fall Time	(Note 4)	-	5.7	21.4	ns

#### **Drain-Source Diode Characteristics**

$I_S$	Maximum Continuous Drain to Source Diode Forward Current			-	37	Α
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	114	Α
$V_{SD}$	Drain to Source Diode Forward Voltage	V <sub>GS</sub> = 0 V, I <sub>SD</sub> = 18.5 A	-	-	1.2	V
t <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> = 0 V, I <sub>SD</sub> = 18.5 A,	-	143	-	ns
Q <sub>rr</sub>	Reverse Recovery Charge	$dI_F/dt = 100 A/\mu s$	-	885	-	nC

#### Notes:

- 1. Repetitive rating: pulse-width limited by maximum junction temperature.
- 2. I<sub>AS</sub> = 6.8 A, V<sub>DD</sub> = 50 V, R<sub>G</sub> = 25  $\Omega$ , starting T<sub>J</sub> = 25°C.
- 3. I\_{SD}  $\leq$  18.5 A, di/dt  $\leq$  200 A/µs, V\_DD  $\leq$  BV\_DSS, starting T\_J = 25°C.
- 4. Essentially independent of operating temperature typical characteristics.

# **Typical Characteristics**

Figure 1. On-Region Characteristics




Figure 3. On-Resistance Variation vs.

Drain Current and Gate Voltage




Figure 5. Capacitance Characteristics




Figure 2. Transfer Characteristics






Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature



**Figure 6. Gate Charge Characteristics** 



# Typical Characteristics (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 9. Maximum Safe Operating Area




Figure 8. On-Resistance Variation vs. Temperature




Figure 10. Maximum Drain Current vs. Case Temperature


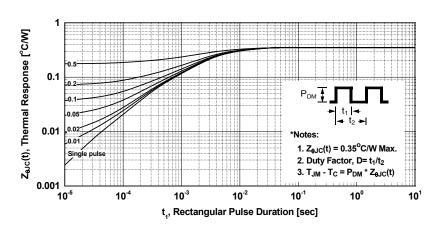


Figure 11. Transient Thermal Response Curve



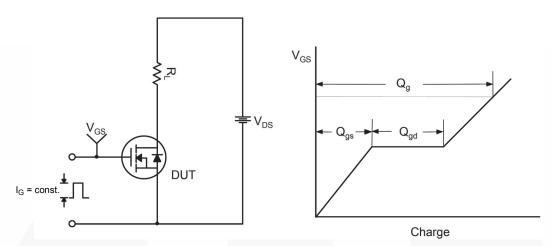


Figure 12. Gate Charge Test Circuit & Waveform

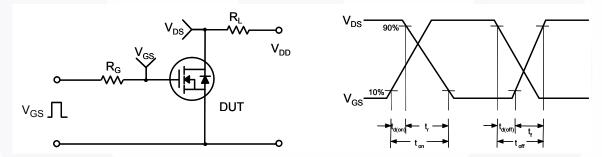


Figure 13. Resistive Switching Test Circuit & Waveforms

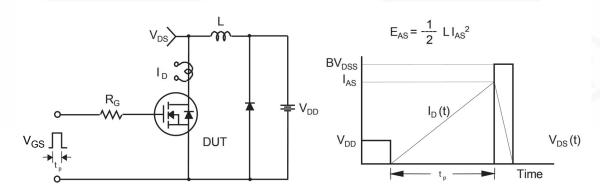


Figure 14. Unclamped Inductive Switching Test Circuit & Waveforms

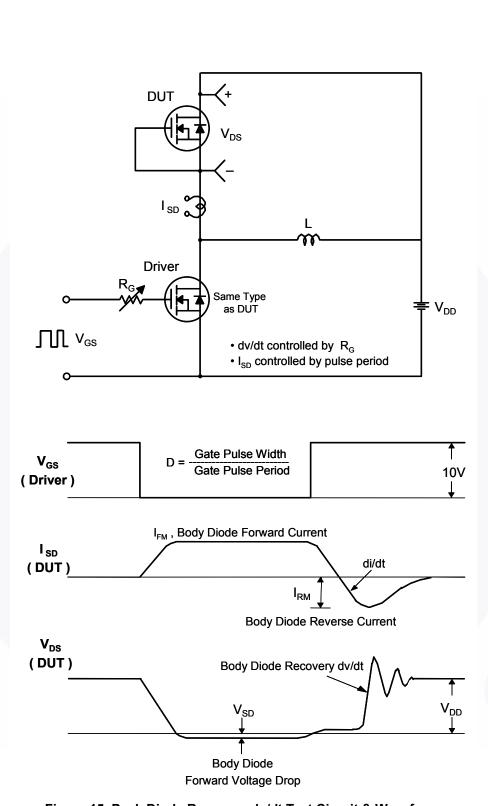


Figure 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

### **Mechanical Dimensions**

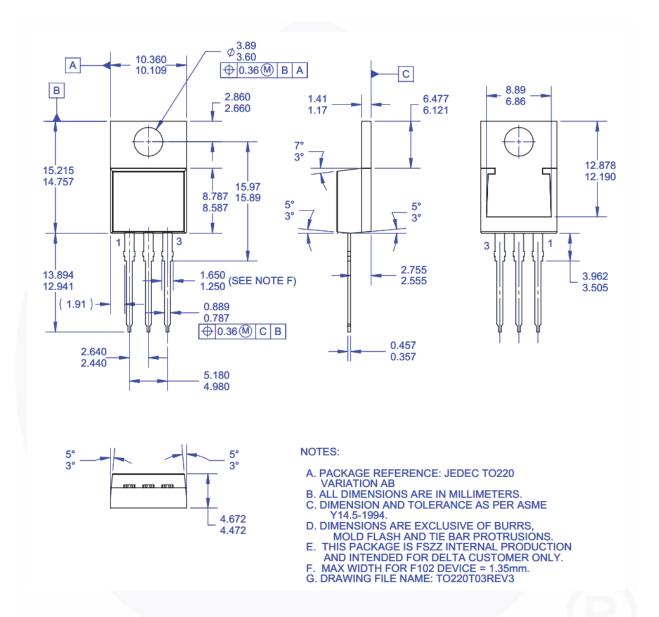


Figure 16. TO-220, Molded, 3-Lead, Jedec Variation AB (Delta)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN\_TT220-0I3





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ AX-CAP® BitSiC™ Build it Now™ CorePLUS™ CorePOWER™  $CROSSVOLT^{\text{TM}}$ 

CTI ™ Current Transfer Logic™ DEUXPEED® Dual Cool™ EcoSPARK®

EfficentMax™ ESBC™

Fairchild<sup>®</sup> Fairchild Semiconductor® FACT Quiet Series™ FACT® FAST® FastvCore™ FETBench™

F-PFS™ FRFET®

Global Power Resource<sup>SM</sup> GreenBridge™ Green FPS™

Green FPS™ e-Series™

G*max*™ GTO™ IntelliMAX™ ISOPLANAR™

Marking Small Speakers Sound Louder

and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™

MillerDrive™ MotionMax™ mWSaver® OptoHiT™ OPTOLOGIC® OPTOPLANAR® PowerTrench® PowerXS™

Programmable Active Droop™

**QFET** QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3

SuperSOT™-6 SuperSOT™-8 SupreMOS® SvncFET™

SYSTEM ®\* TinyBoost<sup>®</sup> TinyBuck<sup>®</sup> TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™

Sync-Lock™

TinvPower™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™ TRUECURRENT®\* μSerDes™

UHC<sup>®</sup> Ultra FRFET™ UniFFT™ VCX™ VisualMax™ VoltagePlus™ XS™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FPS™

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE
EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification Product Status		Definition
Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev 166