




MF2M thru MF10M / MF2S thru MF10S

Miniature Glass Passivated Single-Phase Bridge Rectifiers
Reverse Voltage 200 to 1000 Volts Forward Current 1.0 Ampere


Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 40A peak
- ◆ Saves space on printed circuit boards
- ◆ Recommended for non-automotive applications



Mechanical Data

- ◆ Case: MFxM (MBM), MFxS (MBS)
Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ Mounting Position: Any
- ◆ Weight: 0.078 oz., 0.22 g



Maximum Ratings and Electrical Characteristics

(T_A=25°C unless otherwise noted)

Parameter	Symbols	MF2M MF2S	MF4M MF4S	MF6M MF6S	MF8M MF8S	MF10M MF10S	Units
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	Volts
Maximum average forward output rectified current (see Fig.1)	I _{F(AV)}	1.0					Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	40.0					Amps
Rating for fusing (t < 8.3ms)	I ² t	5.0					A ² sec
Maximum instantaneous forward voltage drop per leg at 0.4A	V _F	1.1					Volt
Maximum DC reverse current at rated DC blocking voltage per leg	I _R	5.0 100					µA
Typical thermal resistance per leg	R _{MA}	85 ⁽¹⁾					°C/W
	R _{MA}	70 ⁽²⁾					
	R _{NIL}	20 ⁽¹⁾					
Typical junction capacitance per leg ⁽³⁾	C _J	13					pF
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150					°C

- Notes:**
1. On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads
 2. On aluminum substrate P.C.B. with an area of 0.8 x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad
 3. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

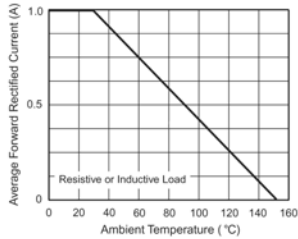


Figure 1. Derating Curve for Output Rectified Current

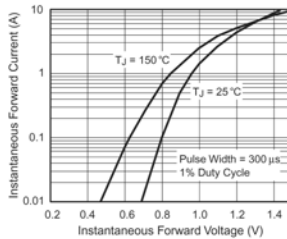


Figure 3. Typical Forward Voltage Characteristics Per Leg

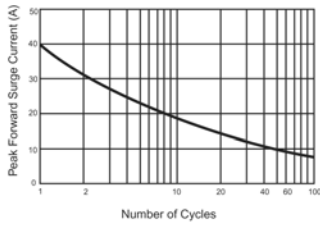


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

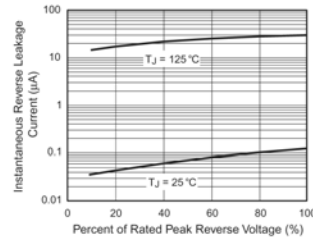


Figure 4. Typical Reverse Leakage Characteristics Per Leg



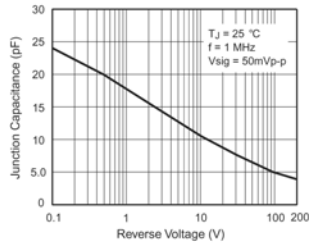


Figure 5. Typical Junction Capacitance Per Leg

MBM

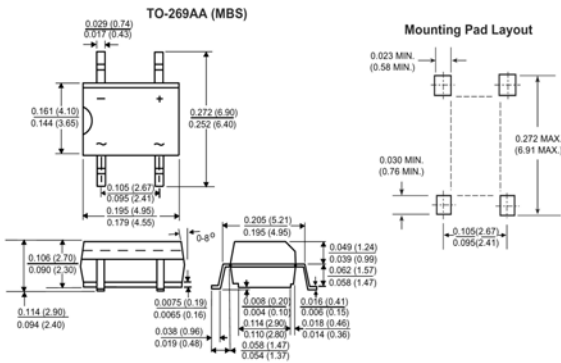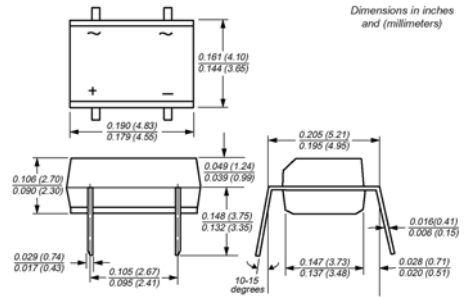

Package outline dimensions in inches (millimeters)