

# SHINDENGEN

## Schottky Rectifiers (SBD)

SBD Bridges


**D15XBS6**

**60V 15A**

### FEATURES

- Thin Single In-Line Package
- SBD Bridge
- Low VF

### OUTLINE DIMENSIONS

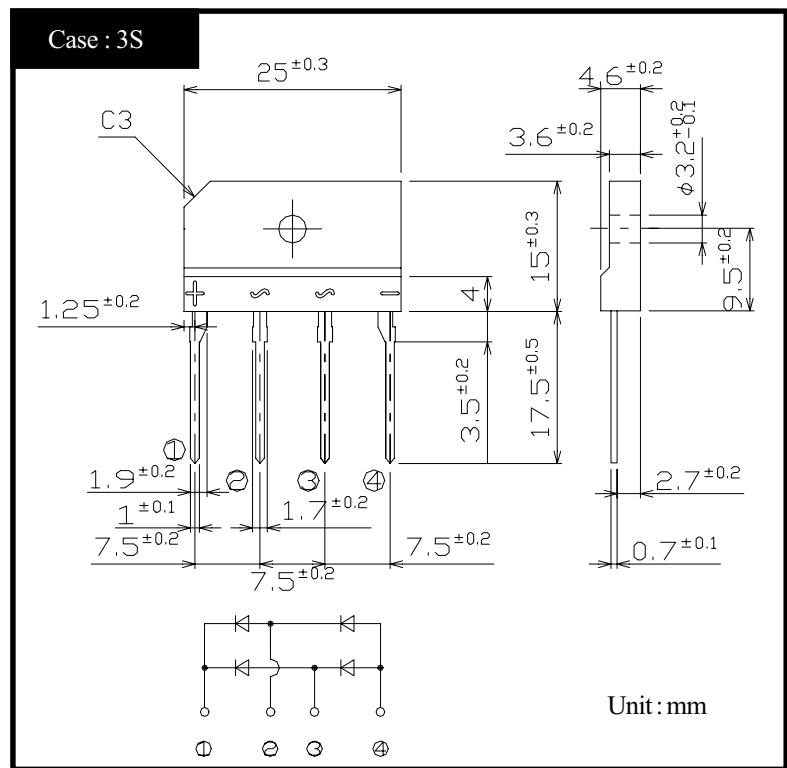

### RATINGS

#### ● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$ )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-55~150	$^\circ\text{C}$
Operating Junction Temperature	$T_j$		150	$^\circ\text{C}$
Maximum Reverse Voltage	$V_{RM}$		60	V
Repetitive Peak Surge Reverse Voltage	$V_{RRSM}$	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	$I_O$	50Hz sine wave, R-load With heatsink $T_c=5^\circ\text{C}$	15	A
		50Hz sine wave, R-load Without heatsink $T_a=25^\circ\text{C}$	2.1	
Peak Surge Forward Current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1cycle peak value, $T_j=25^\circ\text{C}$	150	A
Repetitive Peak Surge Reverse Power	$P_{RRSM}$	Pulse width 10is, Rating of per diode, $T_j=25^\circ\text{C}$	330	W
Dielectric Strength	$V_{dis}$	Terminals to case, AC 1 minute	2	kV
Mounting Torque	$T_{OR}$	( Recommended torque: 0.5N·m)	0.8	N·m

#### ● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$ )

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	$V_F$	$I_F=7.5\text{A}$ , Pulse measurement, Rating of per diode	Max.0.63	V
Reverse Current	$I_R$	$V_R=60\text{V}$ , Pulse measurement, Rating of per diode	Max.6	mA
Junction Capacitance	$C_J$	$f=1\text{MHz}$ , $V_R=10\text{V}$ , Rating of per arm	TYP 410	pF
Thermal Resistance	$\theta_{jc}$	junction to case With heatsink	Max.3.5	$^\circ\text{C}/\text{W}$
	$\theta_{jl}$	junction to lead	Max.6	
	$\theta_{ja}$	junction to ambient	Max.30	


# D15XBS6

## Forward Voltage

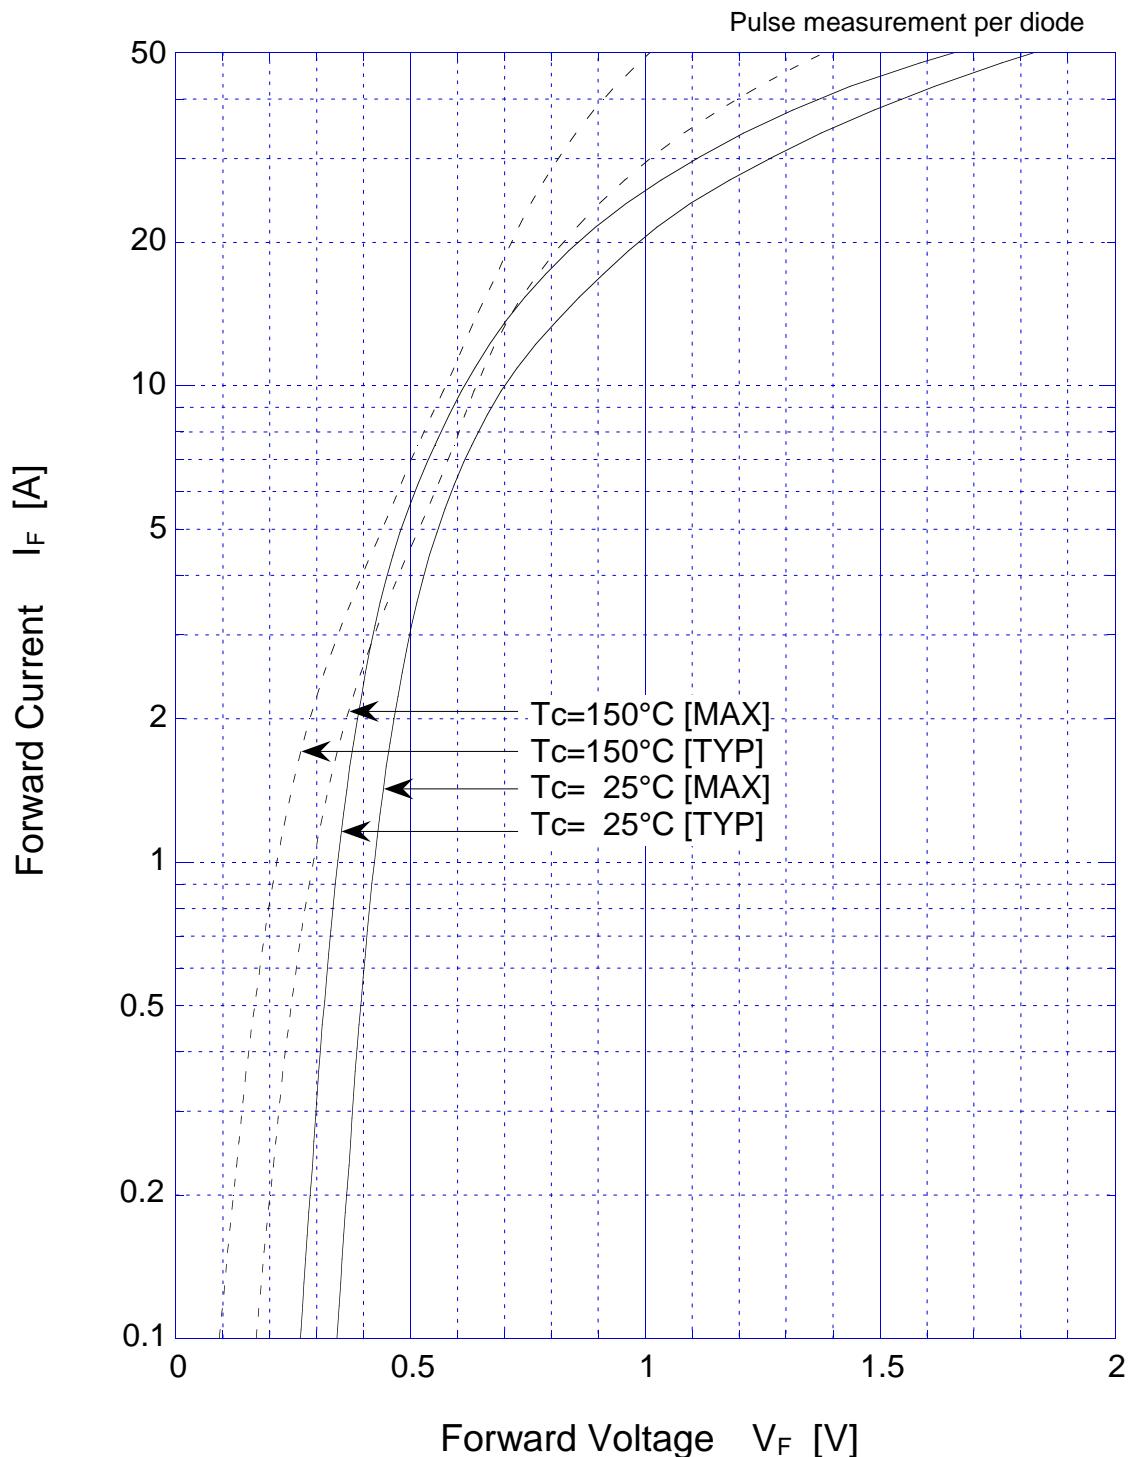


## D15XBS6


## Forward Power Dissipation

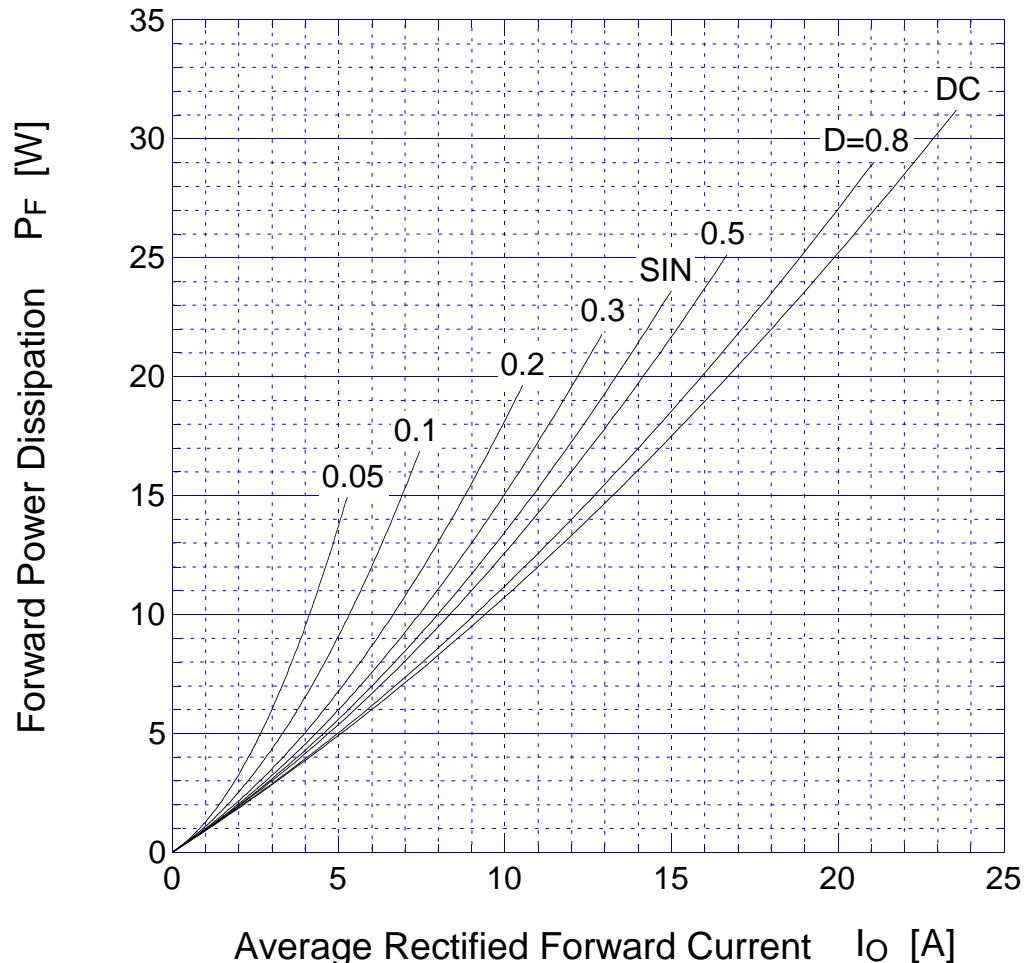


$T_j = 150^\circ\text{C}$

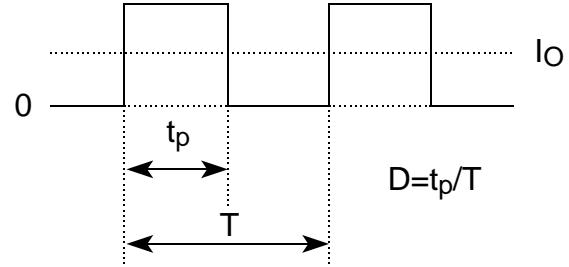


## D15XBS6 Peak Surge Forward Capability

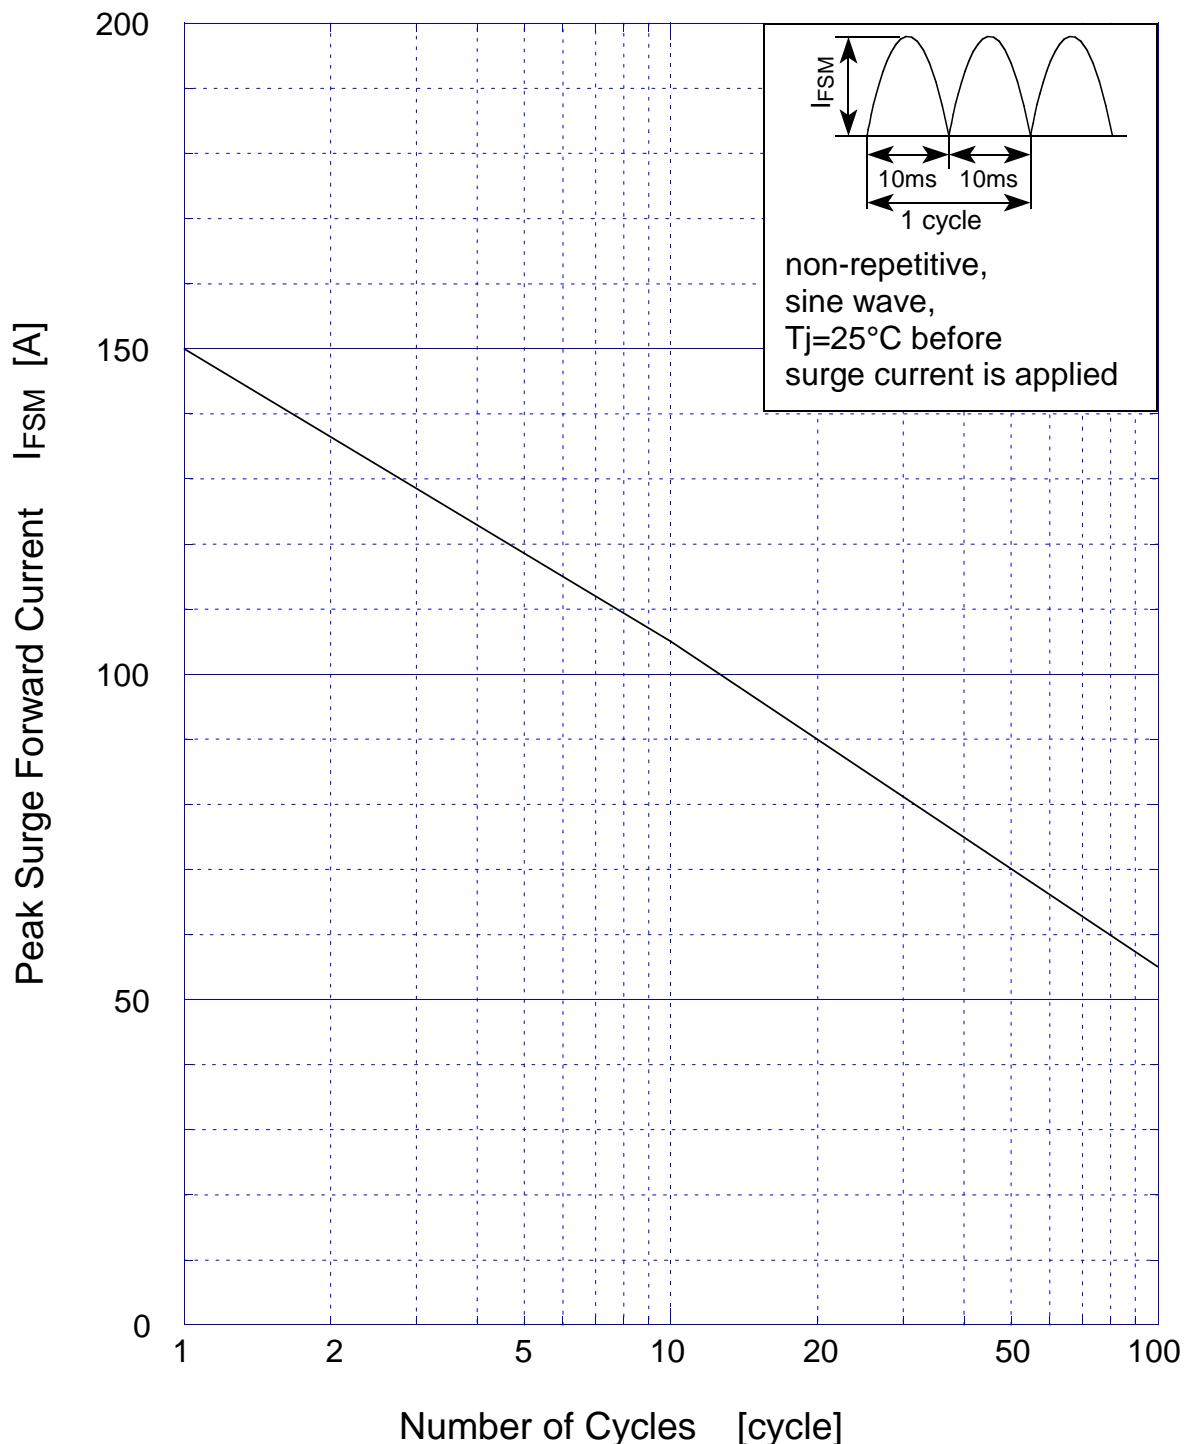


## D15XBS6 Reverse Current

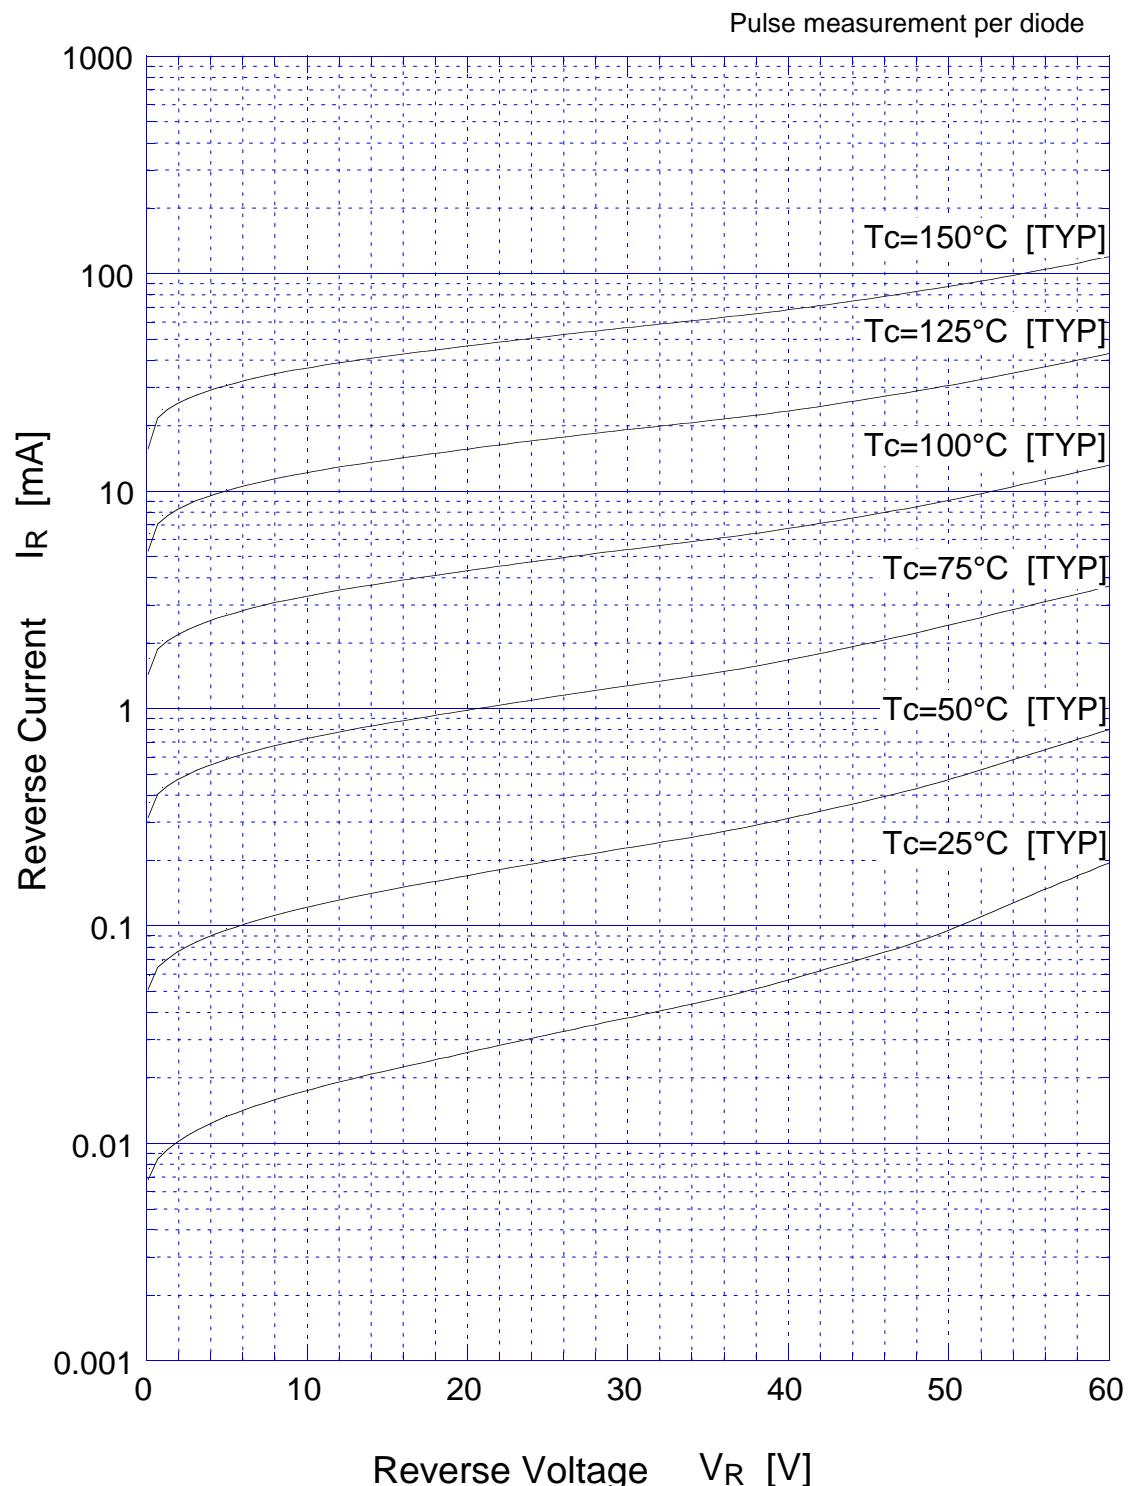


## D15XBS6 Reverse Power Dissipation

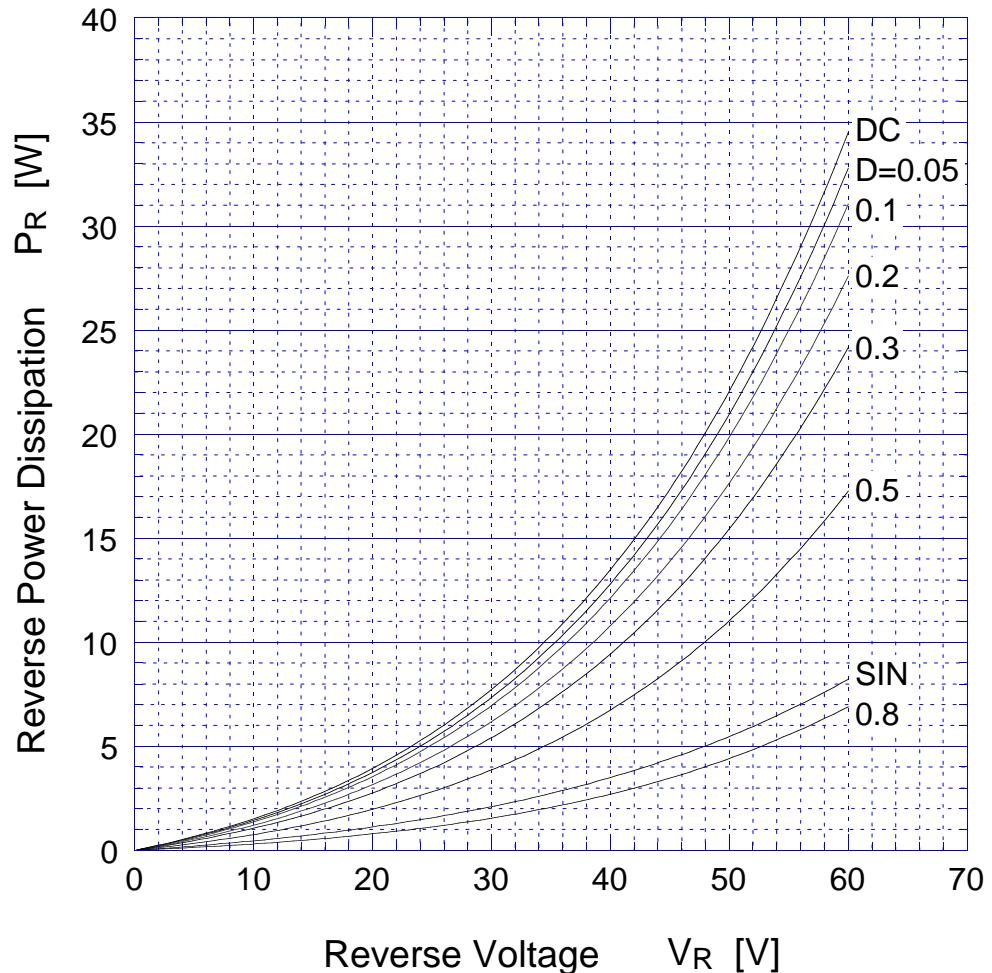

$T_j = 150^\circ\text{C}$


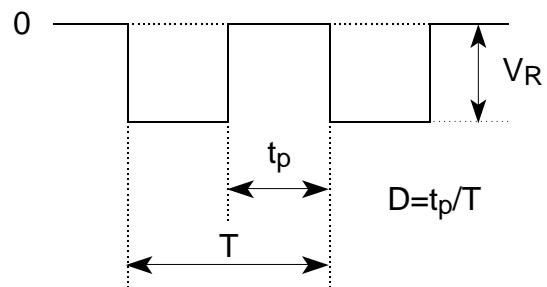


## D15XBS6 Peak Surge Forward Capability

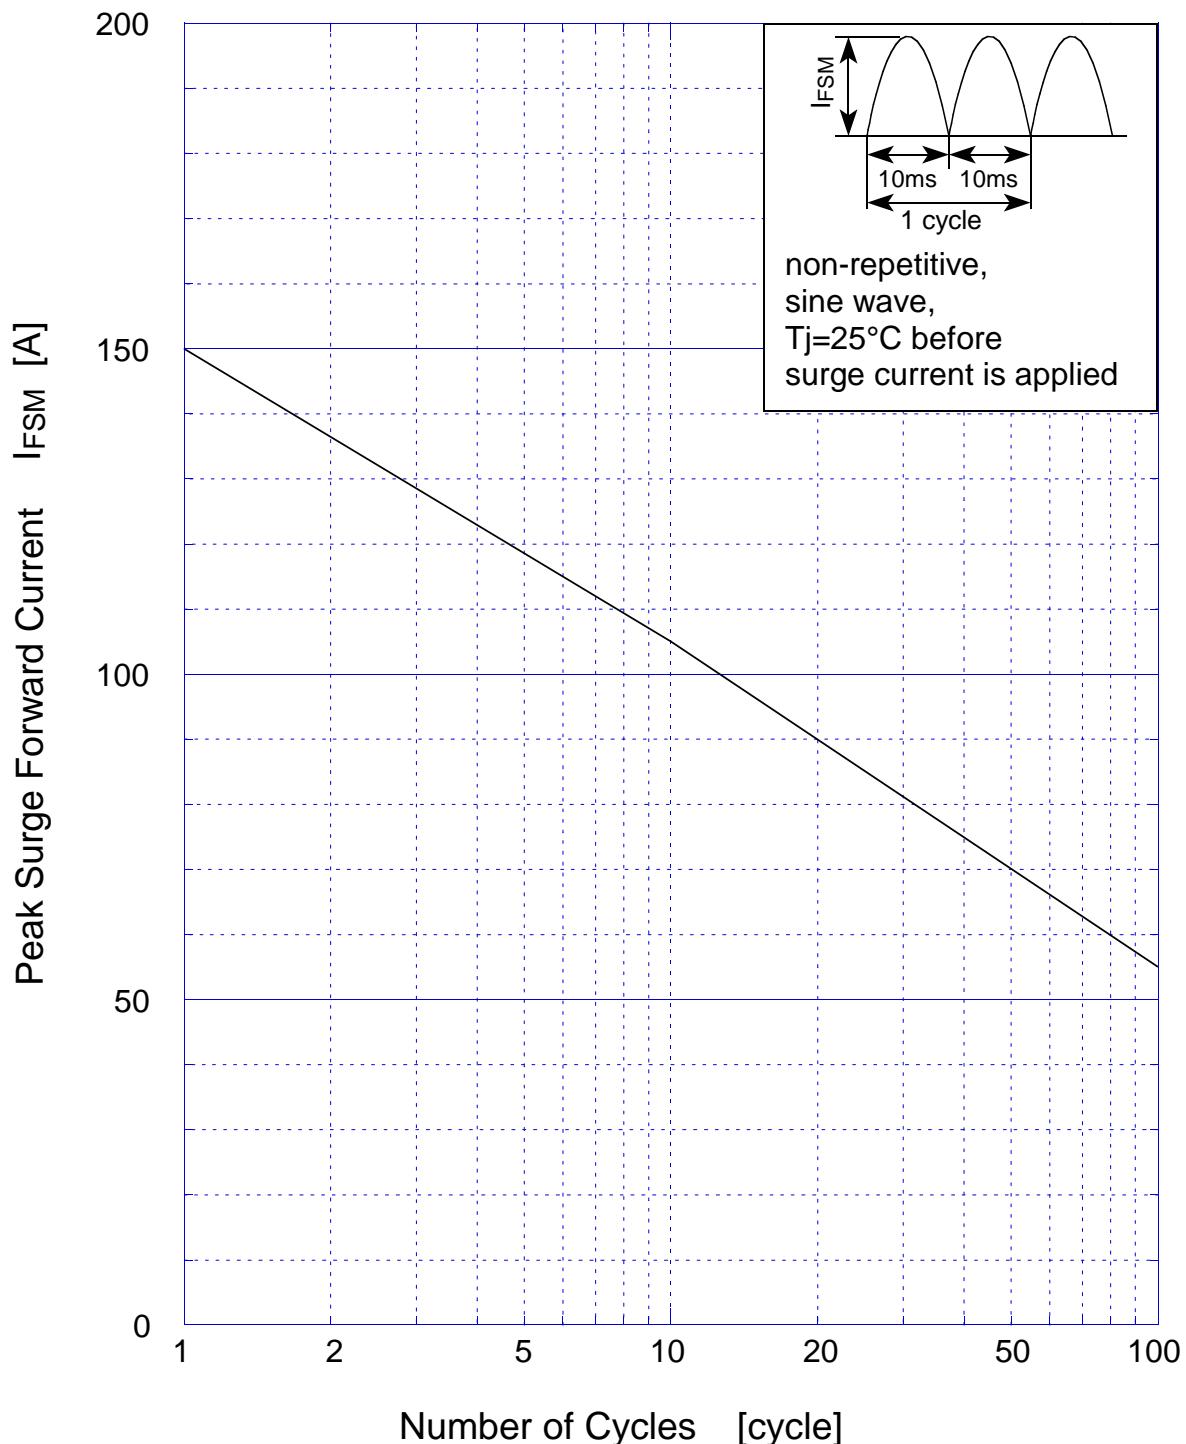



# D15XBS6

## Derating Curve

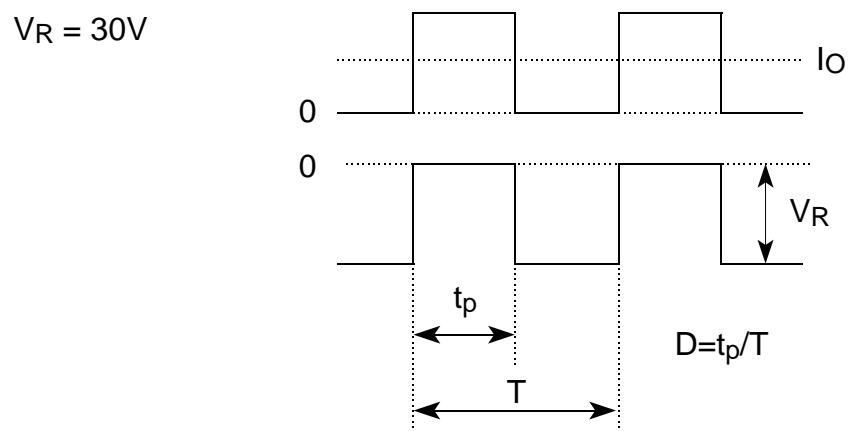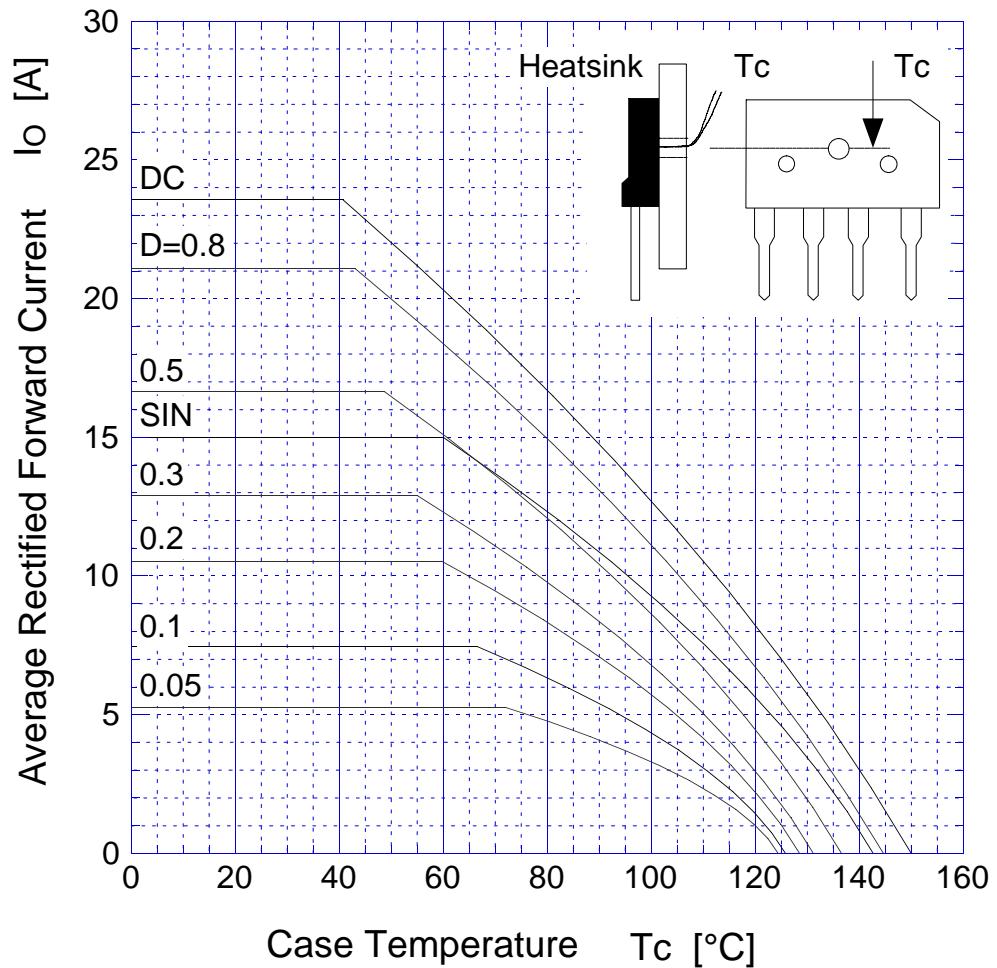



# D15XBS6

## Derating Curve

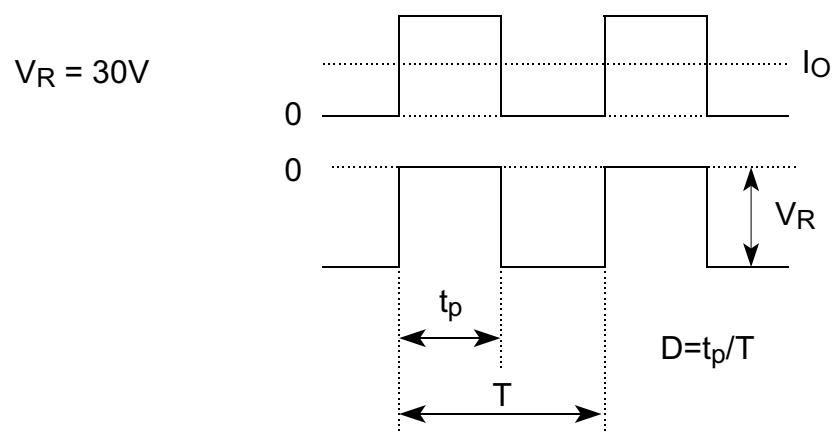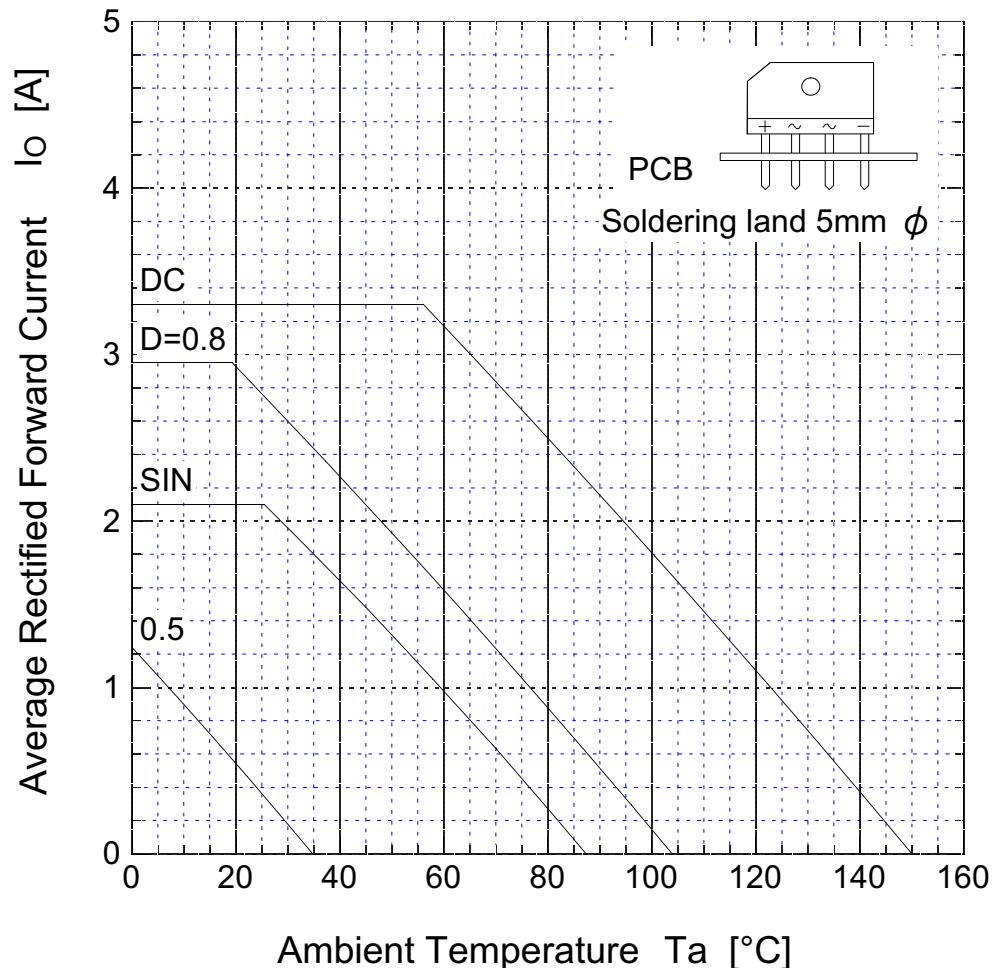

# D15XBS6

Repetitive Surge Reverse Power Capability

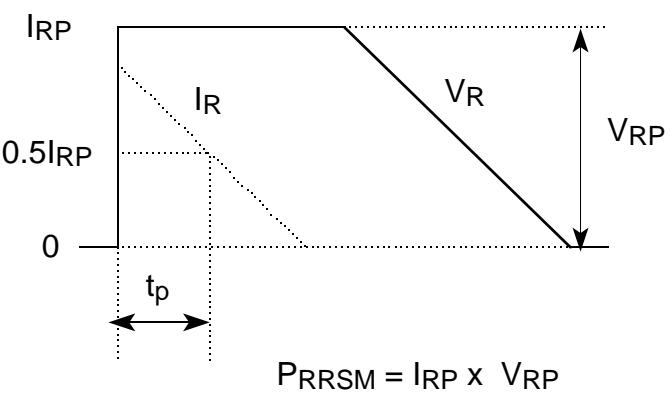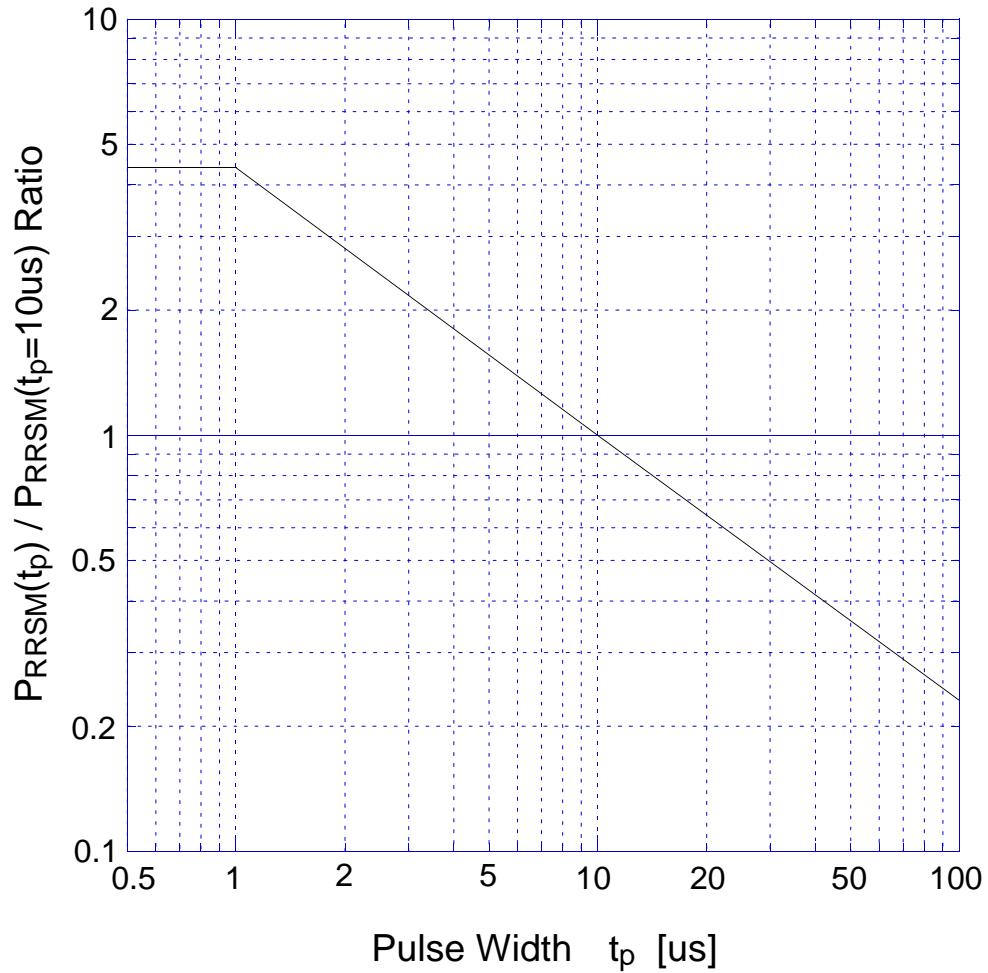

## D15XBS6 Repetitive Surge Reverse Power Derating Curve

