

**LB1450****LED Tuning Indicator****Use**

Indicates tuning condition of FM receiver by means of 5 mode – 3 LEDs.

Features




- 3 LEDs display 5 mode tuning condition.
Since the LEDs are driven under constant current supply, the LED current varies as shown below when two LEDs are lighted on simultaneously. This causes their brightness to vary, and enables the dynamic indication.
- Desired tuning width can be set as the threshold width of window comparator is variable externally.
- No switching radiation can be made as LED current changes over linearly.
- Blanking at station interval and AM reception is easy to set by blanking pin.
- Direct interface can be made to IF IC using quadrature detector (ex. LA1231, LA1140, etc.)
- Single-ended 9 pin package with small mounting area.

mode	LED light- ing mode	tuning condition
(1)	▶ ○ ◁	(-) detuned
(2)	▶ ◐ ◁	semituned
(3)	▶ ● ◁	tuned
(4)	▶ ◐ ◂	semi tuned
(5)	▶ ○ ◂	(+) detuned
(6)	▶ ○ ◁	lighted off

Package Dimensions

unit:mm

3017D-SIP9

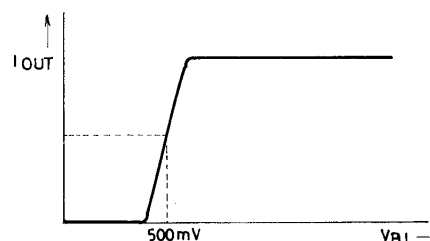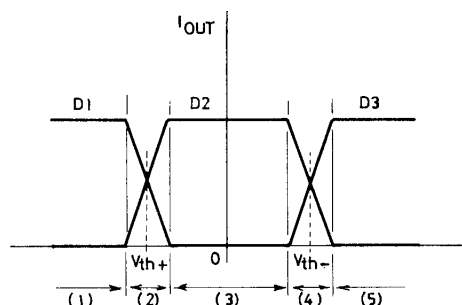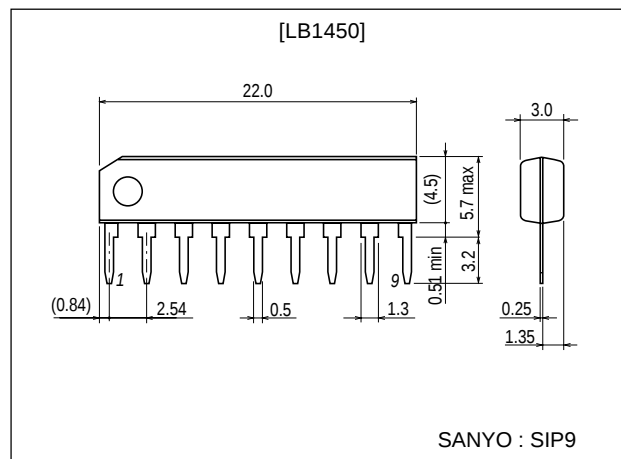

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

22801TN (KT)/20295HK/7097KI/7213KI/D190KI No.730-1/4

Specifications

Absolute Maximum Ratings at $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		18	V
Maximum input voltage	V_{INR}	$V_{CC} > V_{INR}$	-0.3 to +16	V
	V_{IN}	$V_{CC} > V_{IN}$	-0.3 to +16	V
	V_{cont}		-0.3 to +4	V
	V_{BL}	$V_{CC} > V_{BL}$	-0.3 to +16	V
Maximum output voltage	V_{OUT}	Pin 2, 3, 4	16	V
Allowable power dissipation	P_d max	$T_a = 60^{\circ}\text{C}$	500	mW
Operating temperature	T_{opr}		-20 to +70	$^{\circ}\text{C}$



Allowable Operating Ranges at $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		8 to 16	V
Tuning indicaiton voltage width	V_T		200	mV

Electrical Characteristics at $T_a = 25^{\circ}\text{C}$, $V_{CC} = 12\text{V}$



Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Input bias current	I_{IN}		-2		0	μA
	I_{INR}		-20		+20	μA
	I_{INBL}		-2		0	μA
Threshold voltage	V_{th+}	$V_{IN} - V_{INR}$	150	200	250	mV
	V_{th-}	$V_{IN} - V_{INR}$	-250	-200	-150	mV
Simultaneous lighting width	V_w		30	50	100	mV
Output current	$I_{OUT1}, I_{OUT2}, I_{OUT3}$		11	18	25	mA
Blanking threshold voltage	$V_{BL(L)}$		360	430	500	mV
	$V_{BL(H)}$		410	500	550	mV
Output leak current	I_{OFF}				10	μA
Current drain	I_{CC}	LED current excluded	3.0	3.8	5.6	mA

Equivalent Circuit Block Diagram and Pin Assignment

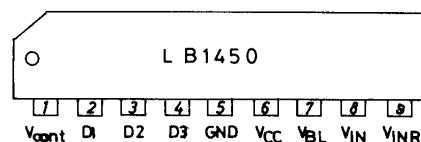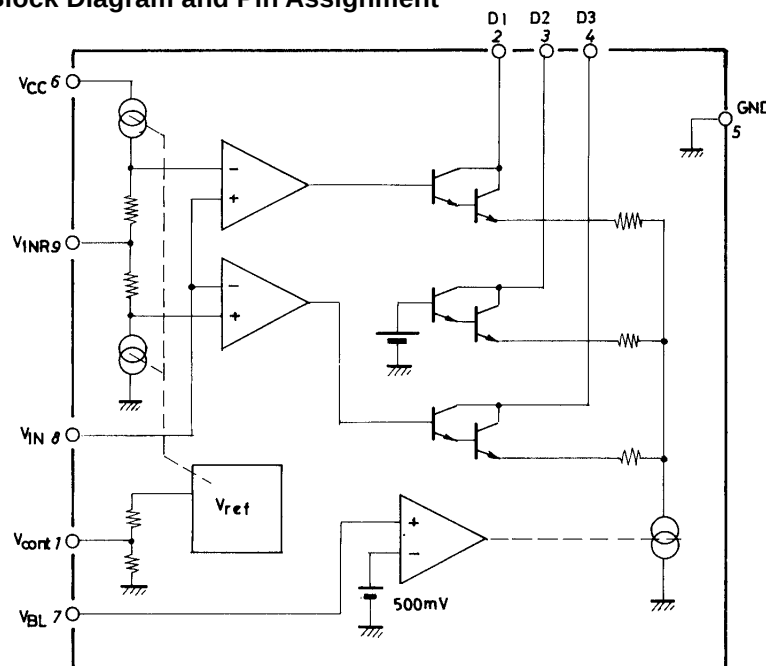

LB1450

Application : The case of window width 400mV typ. ($\pm 200\text{mV}$) and interstation blanking.

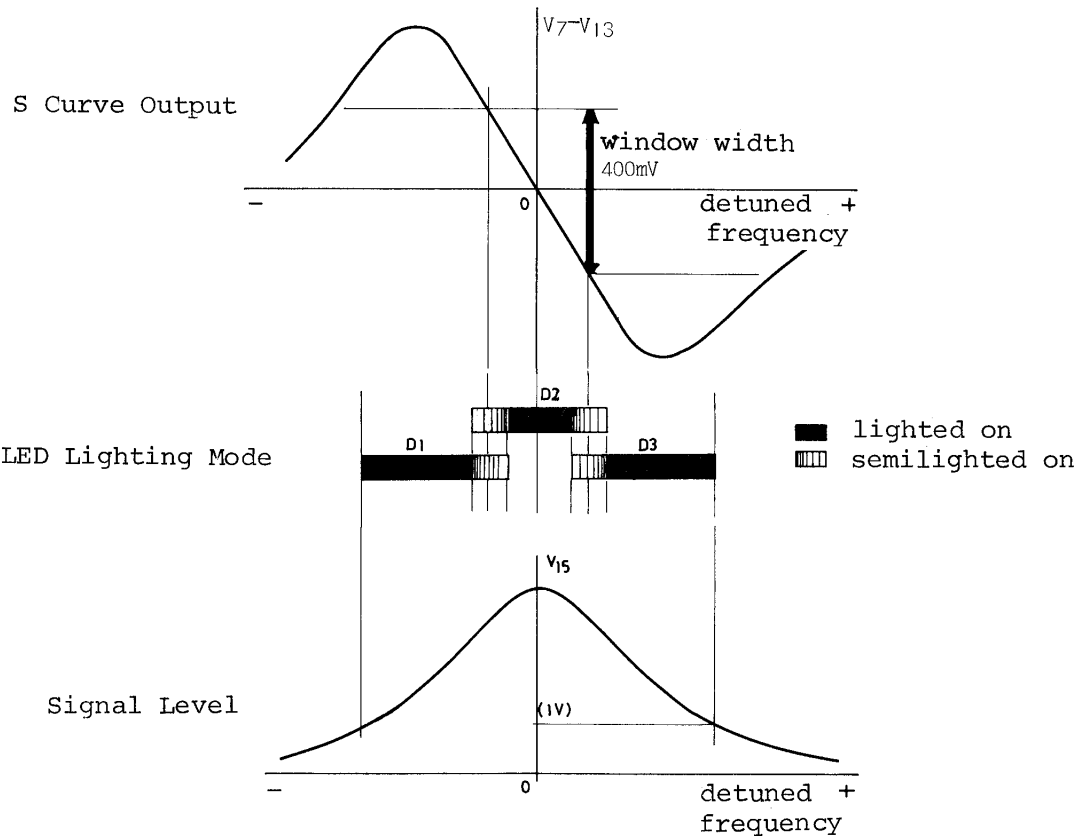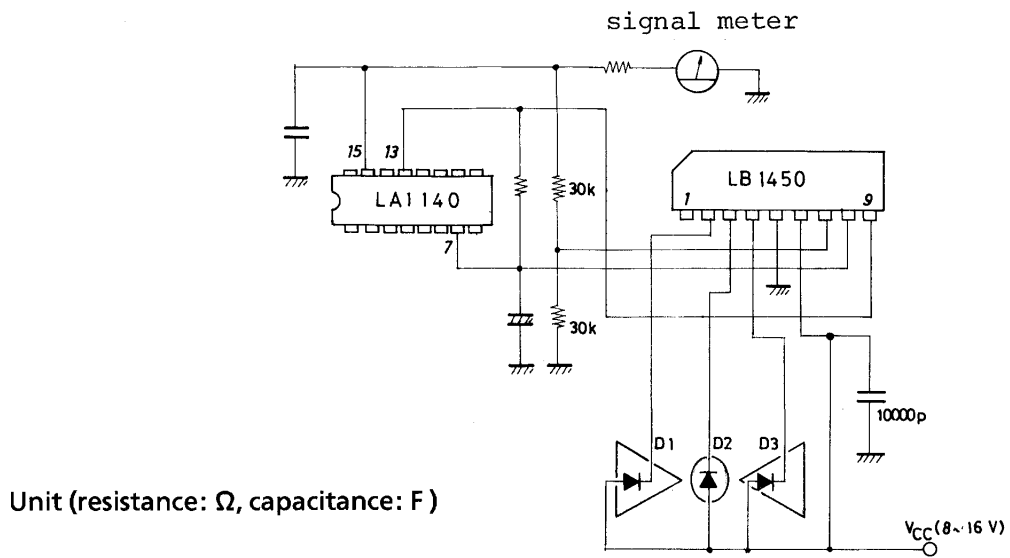

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 2001. Specifications and information herein are subject to change without notice.