

CNZ1215

Photo Interrupter

For contactless SW, object detection

■ Overview


CNZ1215 is a photocoupler in which a visible light emitting diode is used as the light emitting element, and a high sensitivity Darlington phototransistor is used as the light detecting element. The two elements are arranged so as to face each other, and objects passing between them are detected.

■ Features

- Highly precise position detection : 0.3 mm
- Large output current : IC = 2 mA (min.)
- High resolution

■ Absolute Maximum Ratings (Ta = 25°C)

Parameter		Symbol	Ratings	Unit
Input (Light emitting diode)	Reverse voltage (DC)	V _R	3	V
	Forward current (DC)	I _F	25	mA
	Power dissipation	P _D ^{*1}	70	mW
Output (Photo transistor)	Collector current	I _C	30	mA
	Collector to emitter voltage	V _{CEO}	20	V
	Emitter to collector voltage	V _{ECO}	5	V
Temperature	Collector power dissipation	P _C ^{*2}	100	mW
	Operating ambient temperature	T _{opr}	-25 to +80	°C
	Storage temperature	T _{stg}	-30 to +100	°C

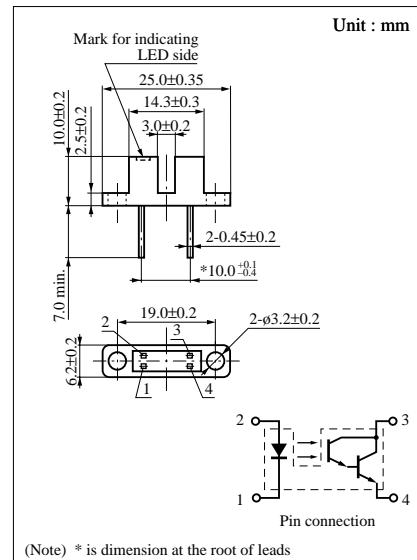

(Note) * is dimension at the root of leads


^{*1} Input power derating ratio is 0.93 mW/°C at Ta ≥ 25°C.

^{*2} Output power derating ratio is 1.33 mW/°C at Ta ≥ 25°C.

■ Electrical Characteristics (Ta = 25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit	
Input characteristics	Forward voltage (DC)	V _F	I _F = 20mA			2.1	2.8	V
	Reverse current (DC)	I _R	V _R = 3V			5		μA
Output characteristics	Collector cutoff current	I _{CEO}	V _{CE} = 10V			100	600	nA
	Collector to emitter capacitance	C _C	V _{CE} = 10V, f = 1MHz			5		pF
Transfer characteristics	Collector current	I _C	V _{CE} = 10V, I _F = 5mA, R _L = 300Ω	2			mA	
	Response time	t _r , t _f [*]	V _{CC} = 10V, I _C = 5mA, R _L = 100Ω		100		μs	
	Collector to emitter saturation voltage	V _{CE(sat)}	I _F = 10mA, I _C = 1mA		0.7	1.5	V	

* Switching time measurement circuit

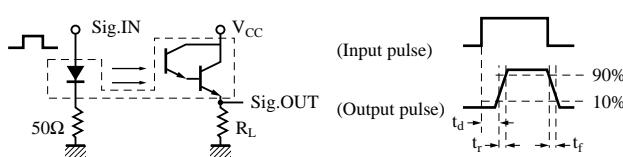

t_d: Delay time

t_r: Rise time (Time required for the collector current to increase from 10% to 90% of its final value)

t_f: Fall time (Time required for the collector current to decrease from 90% to 10% of its initial value)

