

NON-ISOLATED DC/DC CONVERTERS

4.75 – 15V Input / 3.3V Output / 16A



BP06SRDC-16D330

SRDC-16D330 Module

RoHS Compliant

- Nonisolated
- Industry standard pinout
- Fixed frequency
- High efficiency means less power dissipation
- High power density
- Optimized for cost
- Remote on/off
- Programmable undervoltage lockout (UVLO)
- Over current and short circuit protection
- Two phase operation
- Non-latching over temperature shutdown protection



Description

The Bel SRDC-16D330 module is one in a series of non-isolated, DC/DC power converters that operate from a wide input range of 3V minimum to 15V maximum. This converter is available with 3.3V output. It uses a low profile, surface mount DIP package for ease of layout and space savings. 16A maximum output is also provided. Standard features include remote on/off, over current and short circuit protection, programmable UVLO and output voltage adjust. Optional features include two-wire remote sense or single-ended remote sense with a good power signal. This module also makes use of adaptive positioning to improve transient response performance. It may be used almost anywhere low voltage silicon is employed and a 4.75 to 15V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Telecommunications
- Networking
- Computers and peripherals

Options

- Double-ended remote sense
- Power good signal and single-ended sense

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number	Part Number Power Good Signal & Remote Sense	Part Number Double-ended Remote Sense
3.3V	4.75 - 15V	16A	53W	91%	SRDC-16D330	SRDC-16D33S	SRDC-16D33D

BP06SRDC-16D330

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		15	V
Output Enable Terminal Voltage ¹	Vouten	-0.3		6	V
Ambient Temperature	Tamb	0		70	°C
Storage Temperature	Tstor	-40		105	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

- The enable pin performs two functions, remote on/off and programmable under voltage lockout. The factory set UVLO point is 4.25V typical, but can be adjusted upward with the addition of a single external resistor located from the enable pin to ground. Turning the converter on and off is accomplished using an open collector/drain device as a switch. The enable pin is internally pulled up to Vin through a 11.5K resistor and the pin's logic is active high.

Input Specifications

Parameter	Symbol	Min	Typical	Max	Units
Operating Input Voltage	Vin	4.75		15	V
Input Current (Vin=5.0V)	Iin			12	A
Input Current (Vin=12.0V)	Iin			5.1	A
No Load Input Current (Vin=5.0V)	Iin			250	mA
No Load Input Current (Vin=12.0V)	Iin			200	mA
Input Reflected Ripple Current ¹				50	mA _{rms}
Input Reflected Ripple Current (P-P) ¹				100	mApk
I ² t Inrush Current Transient				0.1	A ² s
Turn On Voltage Threshold ²			3.1		V
Turn Off Voltage Threshold		2.8	2.9	3	V

Note: Input capacitance 100µF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

2. UVLO is adjustable by terminating on/off pin to ground per the termination resistance table on page 6.

NON-ISOLATED DC/DC CONVERTERS

4.75 – 15V Input / 3.3V Output / 16A



BP06SRDC-16D330

Output Specifications

Parameter	Symbol	Min	Typical	Max	Units
Output Voltage Set Point	Vout	3.29	3.35	3.4	V
Load Regulation (Droop Impedance)	Rout	2	2.5	3	mΩ
Line Regulation Input Voltage 4.75V to 15V			15	25	mV
Line Regulation Input Voltage 12V ±20%			3	10	mV
Regulation Over Temperature 0° - 70° C			10	25	mV
Output Ripple and Noise ¹			25	40	mVp-p
Output Ripple and Noise ¹			10	20	mVrms
Output Current Range	Iout	0		16	A
Output DC Current Limit	Ioutlim	18		22	A
Turn on Time Vin to Vout or on/off to Vout	Ton		8	10	ms
Overshoot at Turn On			0	1	%
Output Capacitance	Cout	100		2200	μF
Transient Response ² (Vin=5.0V)					
ΔV 50% to 100% of Max Load			150	200	mV
Settling Time	Ts		100	120	μs
ΔV 100% to 50% of Max Load			150	200	mV
Settling Time	Ts		100	120	μs
Transient Response ² (Vin=12.0V)					
ΔV 50% to 100% of Max Load			120	150	mV
Settling Time	Ts		100	120	μs
ΔV 100% to 50% of Max Load			120	150	mV
Settling Time	Ts		100	120	μs

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

- 0 - 20MHz BW, 0.1μF ceramic cap on output.
- di/dt = 1A/1μS, Ta = 25° C with a 560μF oscon cap on output.

BP06SRDC-16D330

General Specifications

Parameter	Symbol	Min	Typical	Max	Units
Efficiency ¹ (Vin=5.0V)	η	90	91		%
Efficiency ² (Vin=12.0V)	η	87.5	89		%
Switching Frequency	Fsw	495	550	605	kHz
Output Voltage Trim Range ³		90		110	%
Remote Sense Compensation (when option specified)				300	mV
Weight			16		g

1. Vin=5V, full load and Ta=25° C.
2. Vin=12V, full load and Ta=25° C.
3. See graph on page 6.

Control Specifications

Parameter	Symbol	Min	Typical	Max	Units
Remote On/Off Open Circuit Voltage (Vin=5.0V)	Vouten			2.1	V
Remote On/Off Open Circuit Voltage (Vin=12.0V)	Vouten			5.1	V
Remote On/Off Impedance Limitation (pin pulled up to +Vin)	Renable			11.5	k Ω
Signal Low (Unit Off)		-0.3		0.3	V
Signal High (Unit On)		1.5		5.5	V
Power Good Levels (when option specified)	Vpg				
Signal Low			0.18	0.4	V
Current Sink				4	mA
Signal High (signal is open collector)				5	V
Under Voltage Threshold Vout rising			3.04		V
Under Voltage Threshold Vout falling			2.97		V

Note: On/off pin designed to work with an open collector/drain switch.


NON-ISOLATED DC/DC CONVERTERS

4.75 – 15V Input / 3.3V Output / 16A



BP06SRDC-16D330

Efficiency Data

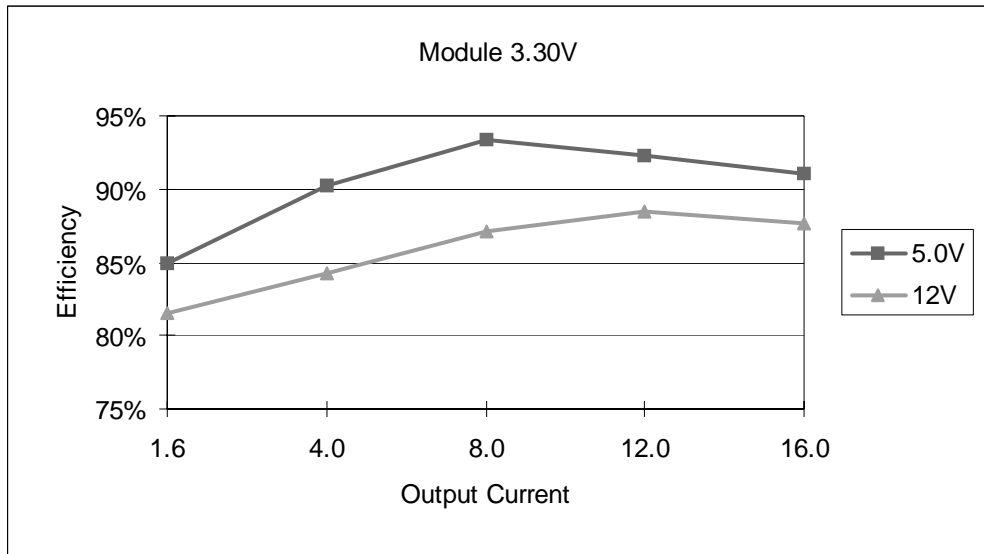


BP06SRDC-16D330


Termination Resistance

Termination Resistance	Rising Vin UVLO	Falling Vin UVLO
Open Circuit	3.93V	3.73V
21K Ω	4.50V	4.33V
5.90K Ω	6.06V	5.86V
4.99K Ω	6.48V	6.24V
3.06K Ω	8.10V	7.65V
2.61K Ω	9.09V	8.56V
2.10K Ω	10.54V	9.55V
2.05K Ω	10.72V	9.69V

UVLO

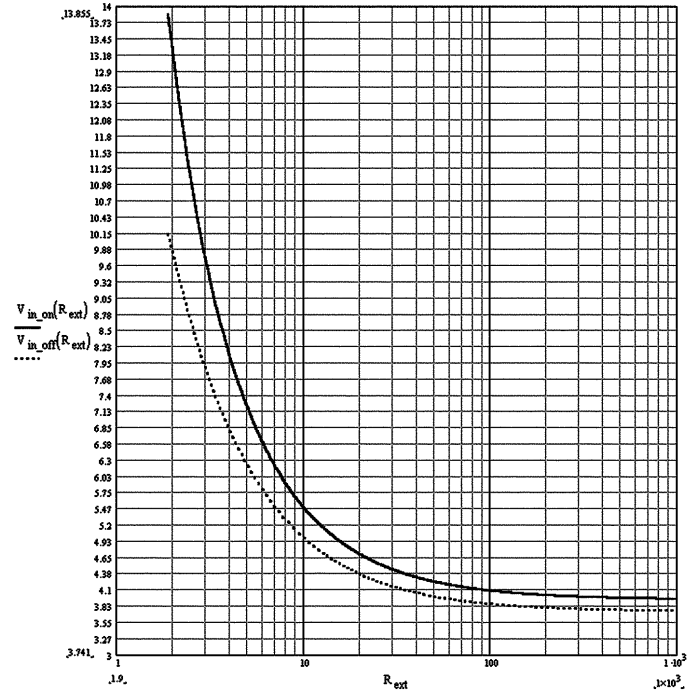

Output Voltage Trim Range

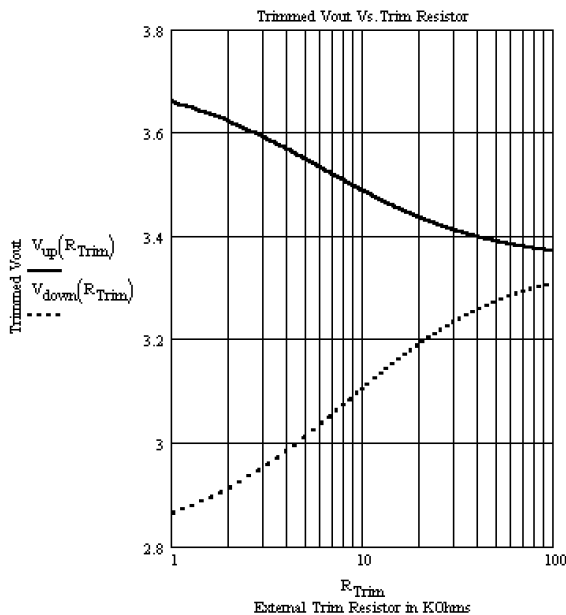

$$V_{up}(10^0) = 3.35 \quad V_{down}(10^0) = 3.35$$

Trimmed Vout for Various K-Ohm E96 Resistor Values

$V_{up}(30.1) = 3.412$	$V_{down}(30.1) = 3.233$
$V_{up}(12.1) = 3.472$	$V_{down}(12.1) = 3.13$
$V_{up}(10) = 3.488$	$V_{down}(10) = 3.104$
$V_{up}(5.11) = 3.548$	$V_{down}(5.11) = 3.014$
$V_{up}(4.32) = 3.562$	$V_{down}(4.32) = 2.993$
$V_{up}(3.83) = 3.573$	$V_{down}(3.83) = 2.978$
$V_{up}(3.01) = 3.593$	$V_{down}(3.01) = 2.951$
$V_{up}(2.87) = 3.597$	$V_{down}(2.87) = 2.946$
$V_{up}(2.67) = 3.602$	$V_{down}(2.67) = 2.939$
$V_{up}(2.00) = 3.623$	$V_{down}(2.00) = 2.912$
$V_{up}(1.00) = 3.661$	$V_{down}(1.00) = 2.864$
$V_{up}(0) = 3.711$	$V_{down}(0) = 2.805$


NON-ISOLATED DC/DC CONVERTERS

4.75 – 15V Input / 3.3V Output / 16A




BP06SRDC-16D330

Ripple and Noise

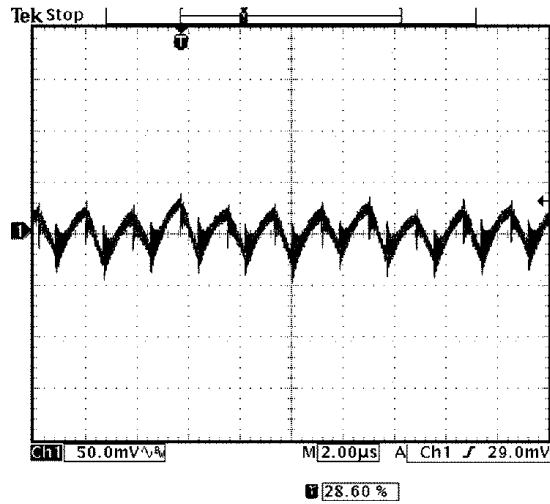

Ripple and noise at full load and 12.0Vdc input, and $T_a=25^\circ\text{C}$

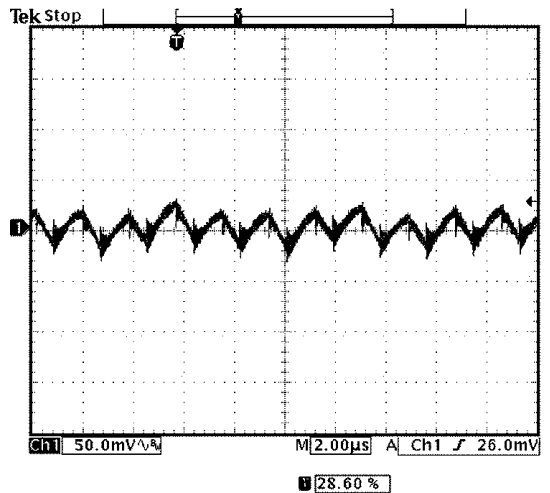


Ripple and noise at full load and 12.0Vdc input, and $T_a=25^\circ\text{C}$ with 560 μF external cap


BP06SRDC-16D330

Transient Response

Transient response: $di/dt = 1.0A/\mu S$

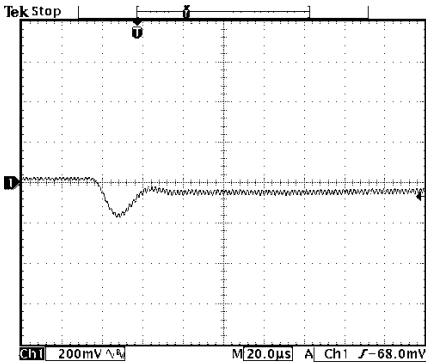

5 Mar 2002
12:37:40

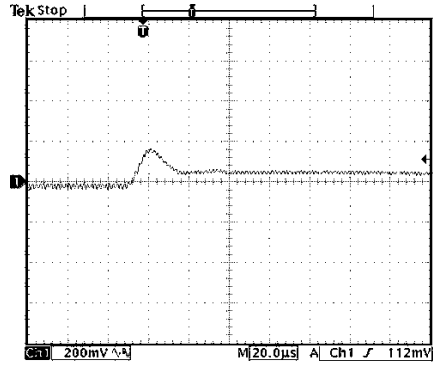


5 Mar 2002
12:30:41


Vout=3.3V
50% to 100% load transients at 12.0V input and Ta=25° C

Vout=3.3V
100% to 50% load transients at 12.0V input and Ta=25° C

Transient response: $di/dt = 1.0A/\mu S$, external load capacitance 560µF

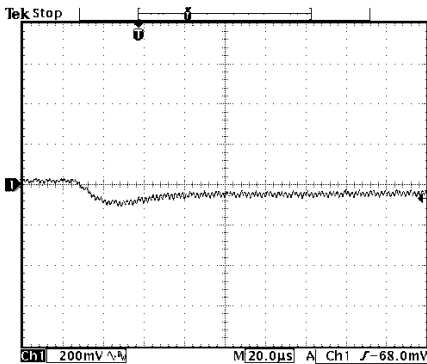

5 Mar 2002
12:36:37

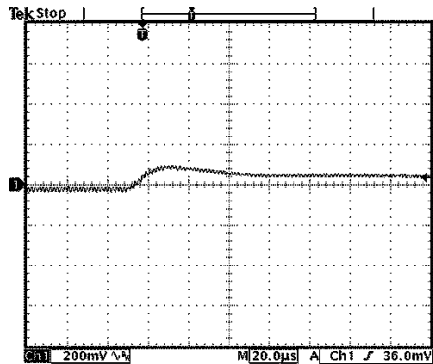

5 Mar 2002
12:34:22

Vout=3.3V
50% to 100% load transients at 12.0V input and Ta=25° C

Vout=3.3V
100% to 50% load transients at 12.0V input and Ta=25° C



NON-ISOLATED DC/DC CONVERTERS

4.75 – 15V Input / 3.3V Output / 16A




BP06SRDC-16D330

Thermal Considerations

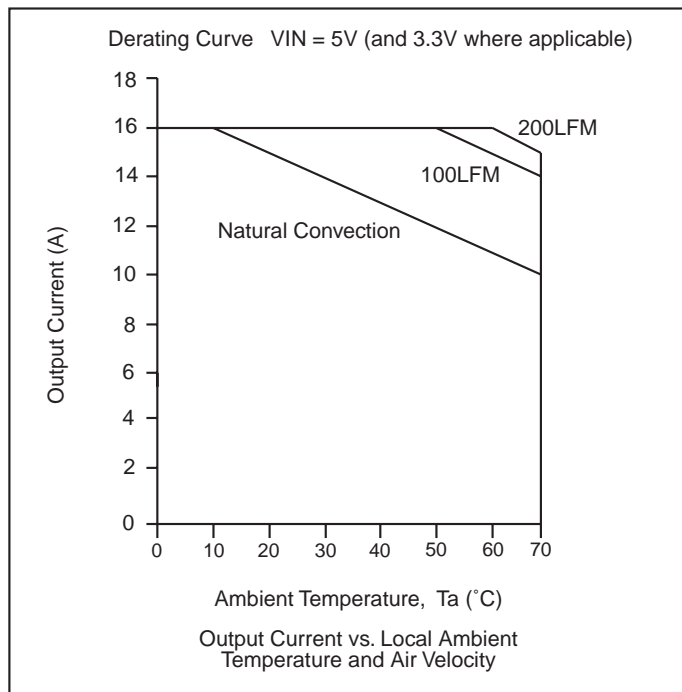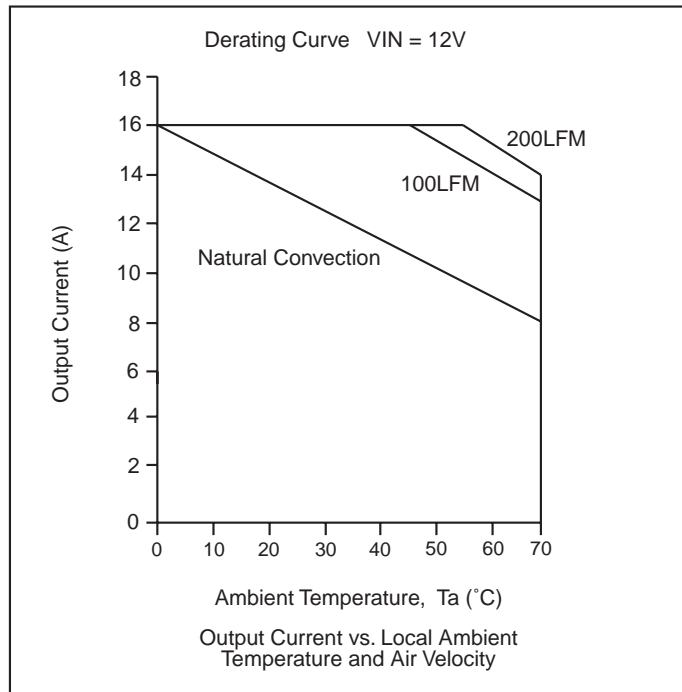

BP06SRDC-16D330

Mechanical

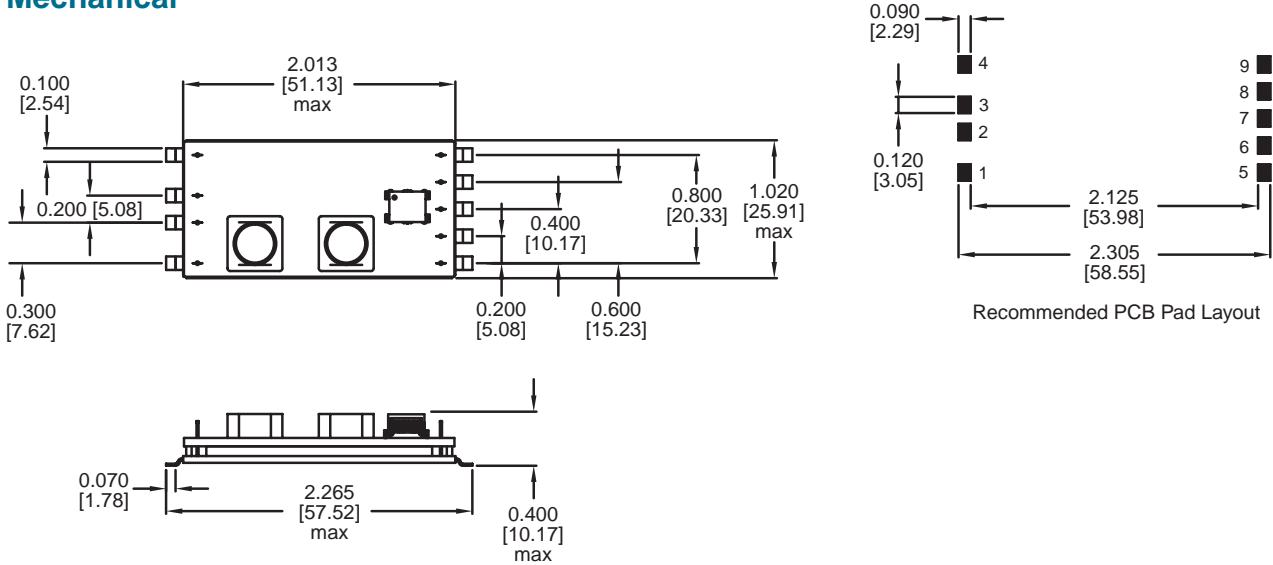

Dimensions are in inches [millimeters].

Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	Control Ground
2	On/Off Control
3 ¹	No Connection
4 ²	No Connection
5	+Vo
6	Trim
7	Power Ground
8	Power Ground
9	+Vin

- Pin 3 not used on module S7DC-16D330, used for - sense on S7DC-16D33D and used for power good signal on the S7DC-16D33S module.
- Pin 4 not used on module S7DC-16D330, used for + sense on both the S7DC-16D33S and S7DC-16D33D modules.

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240°C.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 06.06

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com