

# MS906C3 (20A)

(300V / 20A)

## Low loss fast recovery diode

### Major characteristics

Characteristics	MS906C3	Units	Condition
$V_{RRM}$	300	V	
$V_F$	0.89	V	$T_j=125^{\circ}\text{C}$ , typ
$I_o$	20	A	

### Features

- Low  $V_F$
- Low height : 2.8mm
- Small mounting area
- High reverse voltage
- Center tap connection

### Applications

- High frequency operation
- DC-DC converters
- AC adapter

### Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		300	V
Repetitive peak surge reverse voltage	$V_{RSM}$	$tw=500\text{ns}$ , $duty=1/40$	300	V
Average output current	$I_o$	Square wave, $duty=1/2$ $T_c=95^{\circ}\text{C}$	20 *	A
Surge current	$I_{FSM}$	Sine wave 10ms	80	A
Operating junction temperature	$T_j$		+150	$^{\circ}\text{C}$
Storage temperature	$T_{stg}$		-40 to +150	$^{\circ}\text{C}$

\* Average output current at centertap full wave connection


- Electrical characteristics ( $T_c=25^{\circ}\text{C}$  Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_{FM}$	$I_{FM}=10\text{A}$	1.2	V
Reverse current	$I_{RRM}$	$V_R=V_{RRM}$	200	$\mu\text{A}$
Reverse recovery time	$t_{rr}$	$I_F=0.1\text{A}$ , $I_R=0.2\text{A}$ , $I_{rec}=0.05\text{A}$	35	ns


- Electrical characteristics ( $T_c=25^{\circ}\text{C}$  Unless otherwise specified)

Item	Symbol	Condition	Max.	Unit
Thermal resistance	$R_{th(j-c)}$	Junction to case	2	$^{\circ}\text{C}/\text{W}$







### Outline drawings, mm

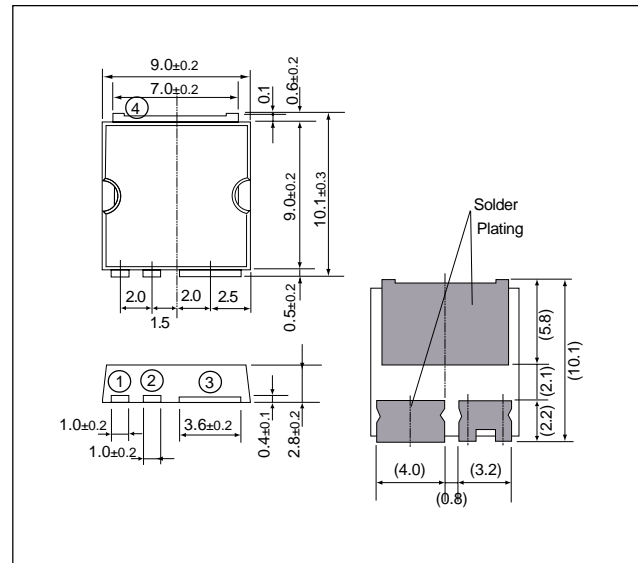


### Connection diagram

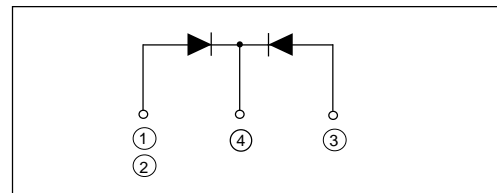

■ Characteristics

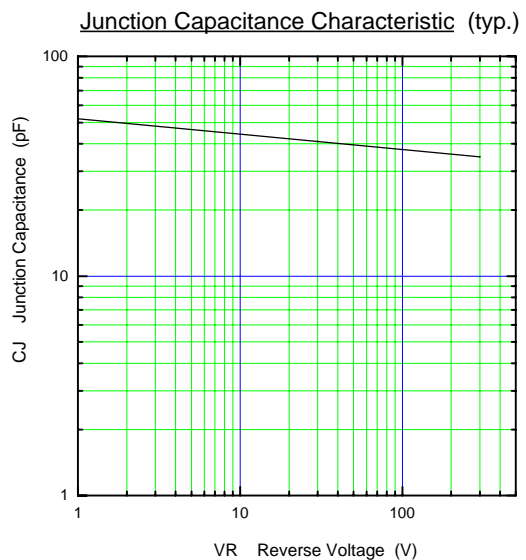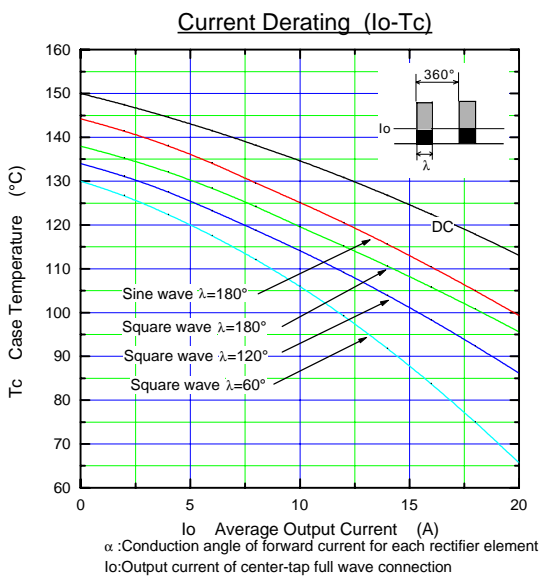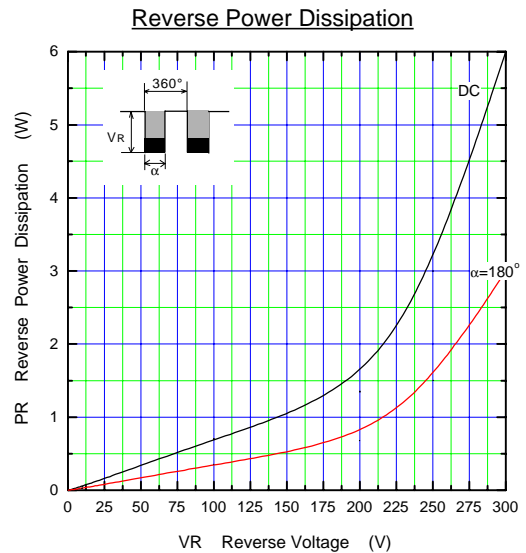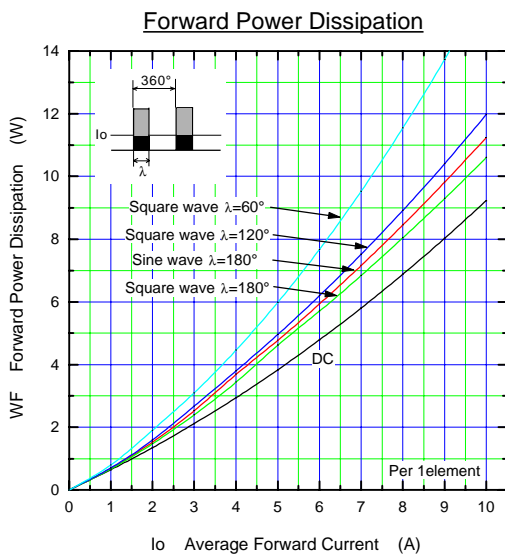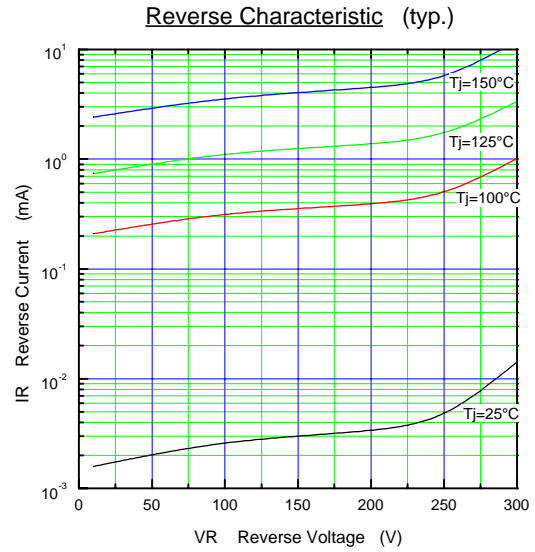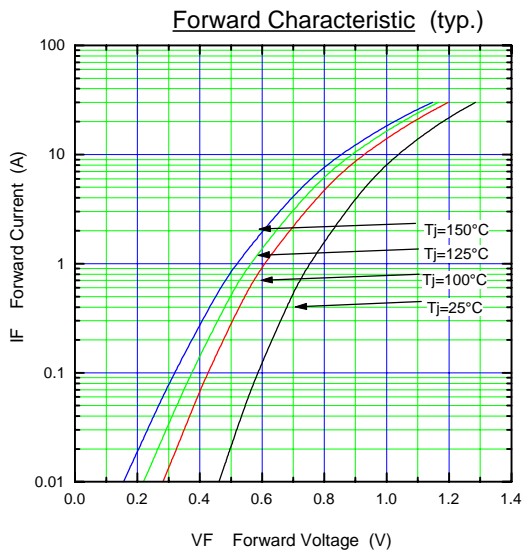

Surge Capability

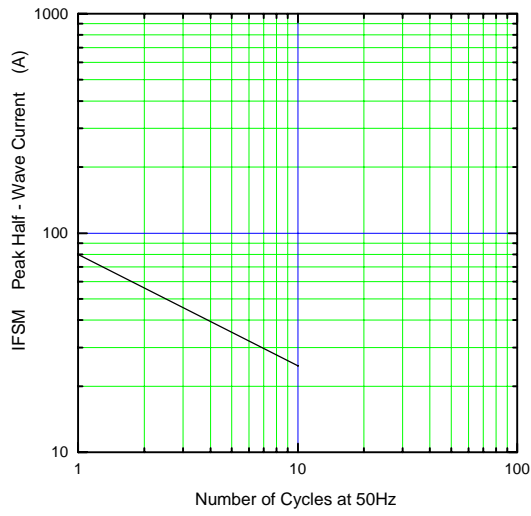

Transient Thermal Impedance

