


Low Profile Miniature Single Phase Surface Mount Bridge Rectifiers Reverse Voltage 100~1000V Output Current 2.0A

#### **Features**

- · Case:ABF
- · Glass passivated standard bridge rectifiers
- · Ideal for automated placement
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 260 °C, 10 s
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Halogen-free according to IEC 61249-2-21 definition



### **Typical Applications**

For use of general purpose AC to DC bridge rectification in power supply, charger, office appliance, home appliance and telecome device.

Maximum Ratings (TA = 25 °C unless otherwise noted)								
Parameter	Symbol	LB201S	LB202S	LB204S	LB206S	LB208S	LB2010S	Unit
Maximum repetitive peak reverse voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS voltage	VRMS	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	100	200	400	600	800	1000	V
Maximum average output rectified current	lo(AV)	V) 2.0		Α				
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	IFSM	SM 60			Α			
Rating for fusing(t<8.3ms)	I <sup>2</sup> t	<sup>2</sup> t 15			A <sup>2</sup> sec			
Operating junction and storage temperature range	TJ, TSTG	- 55 to + 150 °C			°C			

Electrical Characteristics (TA = 25 °C unless otherwise noted)									
Parameter	Test Conditions	Symbol	LB201S	LB202S	LB204S	LB206S	LB208S	LB2010S	Unit
Maximum instantaneous forward voltage	IF=2.0A TA=25℃	V <sub>F</sub>	V <sub>F</sub> 1.1				Volts		
Maximum DC reverse current at rated DC blocking voltage	TA=25℃ TA=125℃	I <sub>R</sub>	5.0 100					μΑ	
Typical junction capacitance	4.0 V, 1 MHz	С	10				pF		

Thermal Characteristics								
Parameter	Symbol	LB201S	LB202S	LB204S	LB206S	LB208S	LB2010S	Unit
T 1 4b 1 (1)	R <sub>eJA</sub>	80						°C/W
Typical thermal resistance <sup>(1)</sup>	R <sub>eJL</sub>	25					C/VV	


Notes: 1. Mounted on FR-4 P.C.B Board

www.goodark.com 1/5 2016.01-Rev.B

Low Profile Miniature Single Phase Surface Mount Bridge Rectifiers
Reverse Voltage 100~1000V Output Current 2.0A

### **Ratings and Characteristics Curves**

 $(TA = 25^{\circ}C \text{ unless otherwise noted})$ 






Fig. 3 Typical Instantaneous Forward

Characteristics

10

T<sub>i</sub> = 150 °C

T<sub>i</sub> = 25 °C


Pulse Width = 300 µs = 1 % Duty Cycle

0.01

0.2

0.4

Instantaneous Forward Voltage(V)




Average Rectified Forward Current (A)

0.8

1

1.2

Fig.5 Typical Reverse Charateristics




www.goodark.com 2/5 2016.01-Rev.B

0




Low Profile Miniature Single Phase Surface Mount Bridge Rectifiers
Reverse Voltage 100~1000V Output Current 2.0A


# **Package Outline Dimensions**



DIM	Unit	: mm	Unit: inch		
	MIN	MAX	MIN	MAX	
Α	1.25	1.35	0.049	0.053	
A1	0.00	0.15	0.000	0.006	
В	0.50	0.70	0.020	0.028	
С	0.15	0.30	0.006	0.012	
D	3.80	4.20	0.150	0.165	
E1	4.40	4.60	0.173	0.181	
E2	5.00	5.20	0.197	0.205	
L	0.25	0.65	0.010	0.026	
HE	6.00	6.40	0.236	0.252	
Н	1.20	1.30	0.047	0.051	




### **TAPING ORIENTATION**

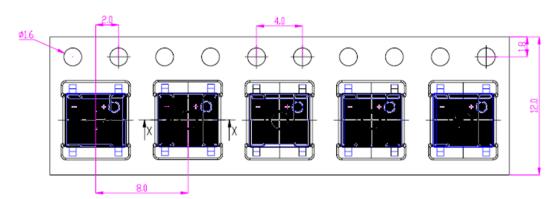

www.goodark.com 3/5 2016.01-Rev.B

Low Profile Miniature Single Phase Surface Mount Bridge Rectifiers
Reverse Voltage 100~1000V Output Current 2.0A

## **Soldering Parameters**

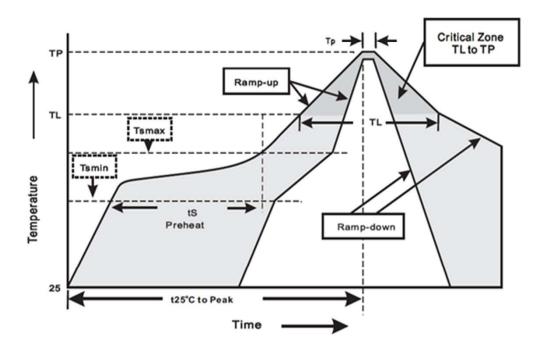

Reflow Soldering		Sn-Pb Eutectic Assembly	Pb-Free assembly	
	- Temperature Min (Ts(min))	100°C	150°C	
Pre Heat	- Temperature Max (Ts(max))	150°C	200°C	
	- Time (min to max) (ts)	60 - 120  secs	60 - 180  secs	
Average ramp up rate (Liqu	idus Temp (TL) to peak)	3°C/second max	3°C/second max	
TS(max) to TL - Ramp-up Rate		3°C/second max	3°C/second max	
Reflow	- Temperature (TL) (Liquidus)	183°C	217°C	
	- Time (min to max) (ts)	60 – 150 seconds	60 – 150 seconds	
Peak Temperature (TP)		240+0/-5 °C	240+0/-5°C	
Time within 5°C of actual peak Temperature (tp)		10 –30 seconds	20-40 seconds	
Ramp-down Rate		6°C/second max	6°C/second max	
Time 25°C to peak Temperature (TP)		6 minutes Max.	8 minutes Max.	
Do not exceed		260°C	260°C	

Wave Soldering					
Peak Temperature:	260+0/-5°C				
Dipping Time :	10 seconds				
Soldering:	1 time				

www.goodark.com 4/5 2016.01-Rev.B



Low Profile Miniature Single Phase Surface Mount Bridge Rectifiers Reverse Voltage 100~1000V Output Current 2.0A

#### **Disclaimers**

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.

www.goodark.com 5/5 2016.01-Rev.B