


OptoMOS®

AC/DC Solid State Switches

AC/DC Solid State Switches



Part Number	LBB110	LBB120	LCC110	LCC120	OAA160
Peak Blocking (V)	350	250	350	250	250
Continuous Rated Load (mA)*	120	170	120	170	50
Peak Load/10msec (mA)	350	400	350	350	100
On Resistance (Ohms)					
Typical	23	12	23	16	50
Maximum	35	20	35	20	100
Switching Time (Max)					
I _{CONTROL} (mA)	5	5	8	10	10
T _{ON} (msec)	3	5	4	5	.125
T _{OFF} (msec)	3	5	4	5	.125
Off State Leakage (Max) at Full Rated Voltage (μA)	1	1	1	1	.025
Typical Capacitance at 0 Volts f = 1MHz (pF)	25	50	25	50	5

Part Number	LBB110	LBB120	LCC110	LCC120	OAA160
Peak Blocking (V)	350	250	350	250	250
Continuous Rated Load (mA)*	120	170	120	170	50
Peak Load/10msec (mA)	350	400	350	350	100
On Resistance (Ohms)					
Typical	23	12	23	16	50
Maximum	35	20	35	20	100
Switching Time (Max)					
I _{CONTROL} (mA)	5	5	8	10	10
T _{ON} (msec)	3	5	4	5	.125
T _{OFF} (msec)	3	5	4	5	.125
Off State Leakage (Max) at Full Rated Voltage (μA)	1	1	1	1	.025
Typical Capacitance at 0 Volts f = 1MHz (pF)	25	50	25	50	5

Min	Max	Units
2500	—	V _{RMS}
3750	—	V _{RMS}
-40	85	°C
-40	125	°C
—	260	°C

When ordering CP Clare solid state switches, a suffix may be added to the part number to specify the following options:

Suffix	Option
E	3,750 Isolation Voltage
S	Gull-Wing Package*
T/R	Tape and Reel Package*
L	Current Limiting Version

Note: Special part numbers are available on an application/request basis.

Engineering Specifications	LAA110	LAA120	LBA110	LBA120
Peak Blocking (V)	350	250	350	250
Continuous Rated Load (mA)*	120	170	120	170
Peak Load/10msec (mA)	350	400	350	400
On Resistance (Ohms)				
Typical	23	12	23	16
Maximum	35	20	35	20
Switching Time (Max)				
I _{CONTROL} (mA)	5	5	5	5
T _{ON} (msec)	3	5	3	5
T _{OFF} (msec)	3	5	3	5
Off State Leakage (Max) at Full Rated Voltage (μA)	1	1	1	1
Typical Capacitance at 0 Volts f = 1MHz (pF)	25	50	25	50

*I_{LOAD} derates to 80% if both poles are operated simultaneously.

Input Characteristics	LAA110	LAA120	LBA110	LBA120
Control Current (mA)*				
Minimum	5	5	5	5
Maximum	100	100	100	100
Voltage Drop (V)				
Minimum	0.9	0.9	0.9	0.9
Maximum	1.4	1.4	1.4	1.4
Reverse Voltage (max V)	5	5	5	5
Reverse Leakage (max μA)	10	10	10	10
Input/Output (Capacitance, pF)	3	3	3	3

*I_{CONTROL} represents the forward LED current used to activate the switch.

Features:

- Rated to 350V AC or DC
- Load current to 170 mA
- Optical isolation to 3750V
- No EMI/RFI generation
- 100% dv/dt immunity
- Machine insertable/wave solderable
- SMD versions available
- UL recognized
- No minimum load voltage or current

Absolute Maximum Rating

Parameter
Input/Output Isolation
Optional "E" Suffix
Operating Temperature
Storage Temperature
Soldering Temperature (10 seconds on leads)


*For a complete listing of CP Clare Solid State Products ask for our SSP15

OptoMOS®


AC/DC Operating Specifications

Performance


Load vs. Temperature

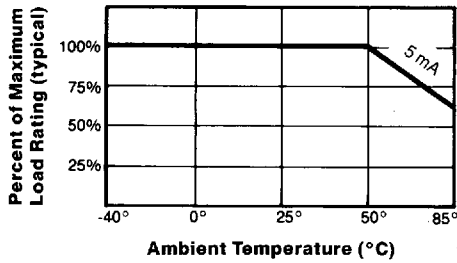


On Resistance vs. Temperature

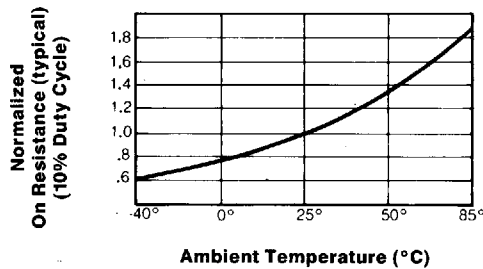


Energy Rating

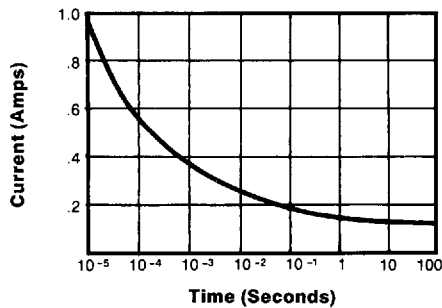


Switching Time vs. Temperature (LCC Series)

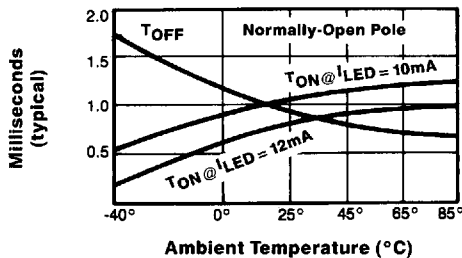


Switching Time vs. Temperature (LCC Series)

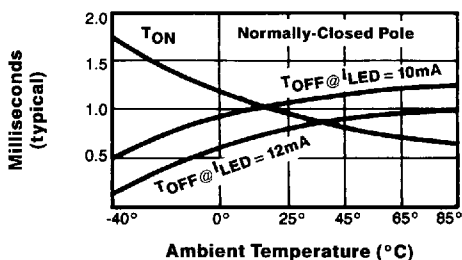

Switching Time vs. Temperature (LBA Series)

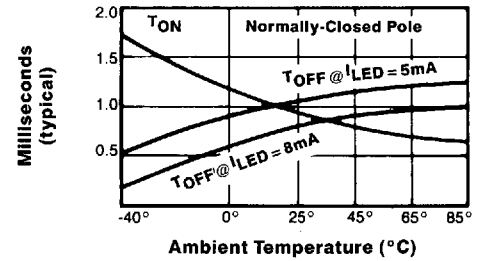

Switching Time vs. Temperature (LBA Series)

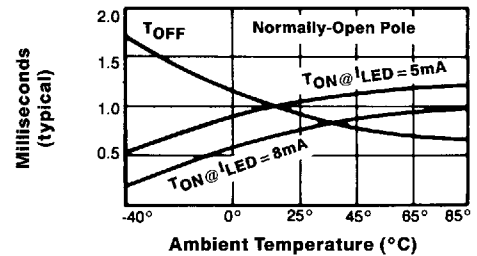


Equivalent Circuit

LAA/OAA

LAA/OAA 110/120 PIN

CONNECTIONS:

- 1, 2 Control, Pole 1
- 3, 4 Control, Pole 2
- 5, 6 Normally-Open Pole 2
- 7, 8 Normally-Open Pole 1




LBA

LBA 110/120 PIN

CONNECTIONS:

- 1, 2 Normally-Closed Control
- 3, 4 Normally-Open Control
- 5, 6 Normally-Open Pole
- 7, 8 Normally-Closed Pole




LBB

LBB 110/120 PIN

CONNECTIONS:

- 1, 2 Control, Pole 1
- 3, 4 Control, Pole 2
- 5, 6 Normally-Closed Pole 2
- 7, 8 Normally-Closed Pole 1




LCC


LCC 110/120 PIN

CONNECTIONS:


- 1 N/C
- 2 + Control
- 3 - Control
- 4 Do Not Use
- 5, 6 Normally-Open Pole
- 7, 8 Normally-Closed Pole




6 Pin Through Hole (Standard)

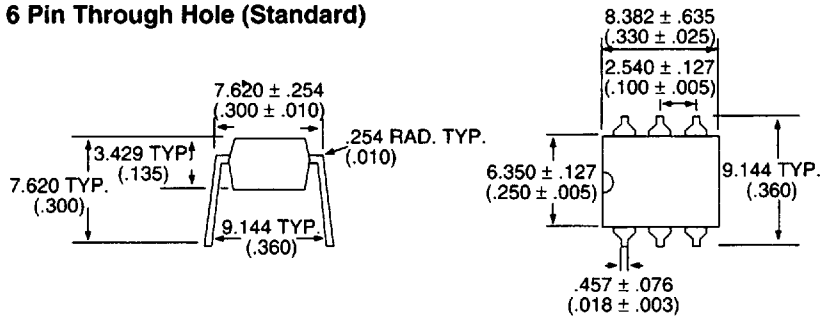


6 Pin PC Board Pattern (Bottom View)

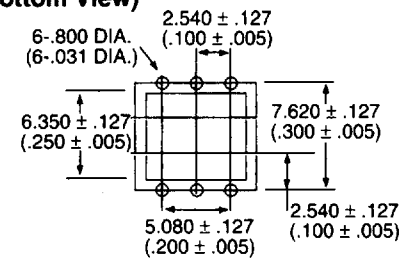


6 Pin Surface Mount ("S" Suffix)

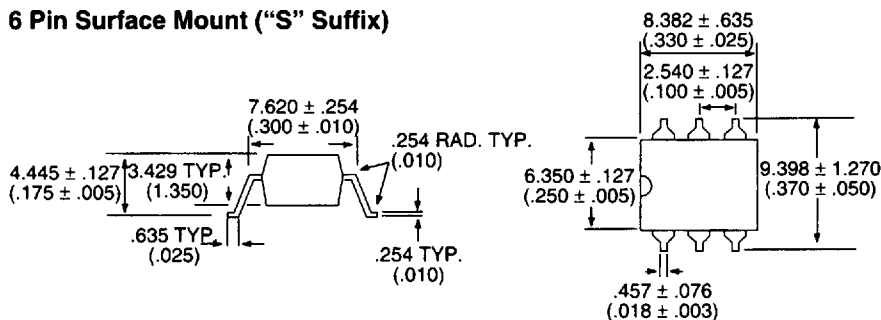


6 Pin Mounting Pad (Top View)

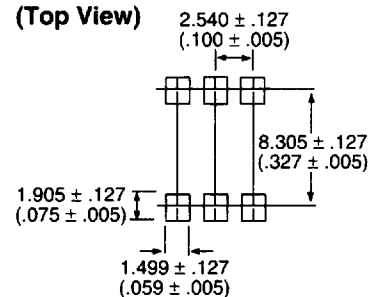


8 Pin Through Hole (Standard)

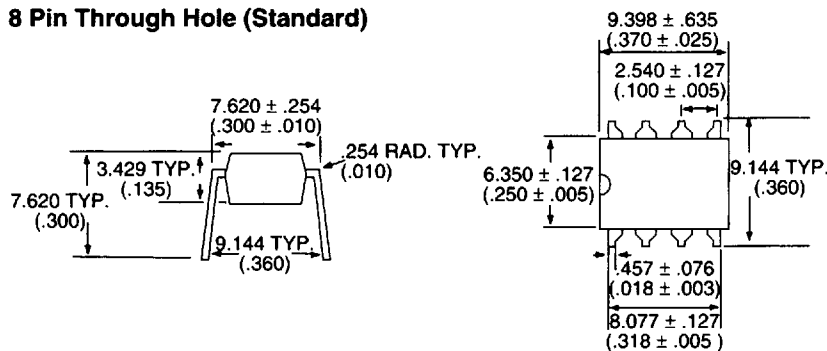


8 Pin PC Board Pattern (Bottom View)

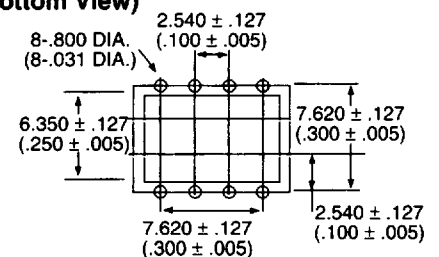

8 Pin Surface Mount ("S" Suffix)

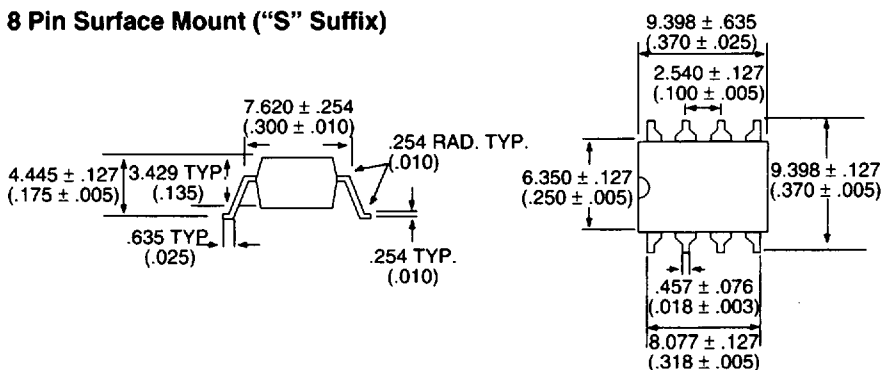


8 Pin Mounting Pad (Top View)

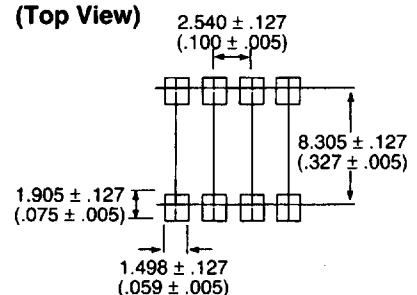


DIMENSIONS
mm
(Inches)


8 Pin Flatpack ("P" Suffix)

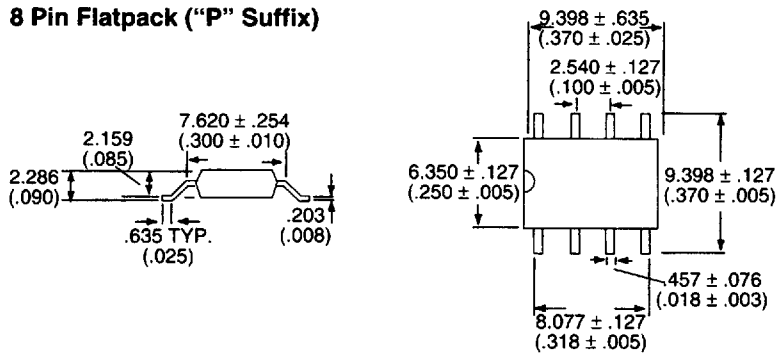


8 Pin Flatpack Mounting Pad (Top View)

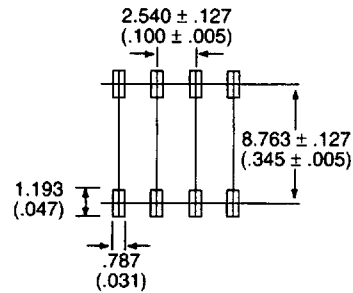


16 Pin SOIC ("P" Suffix)

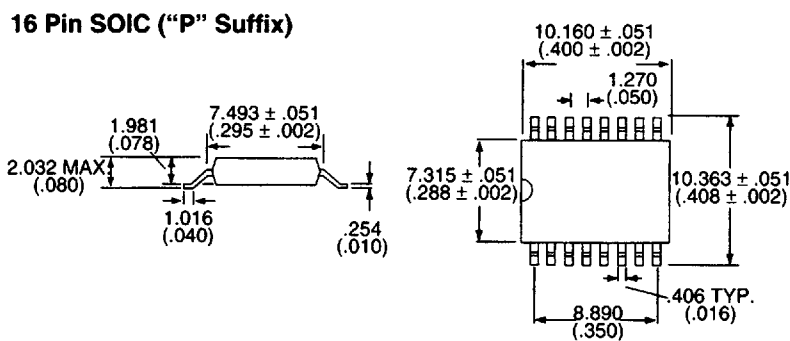


16 Pin SOIC Mounting Pad (Top View)

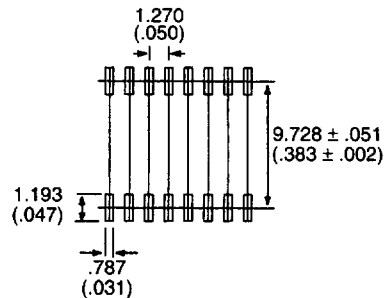


16 Pin Through Hole (Standard)

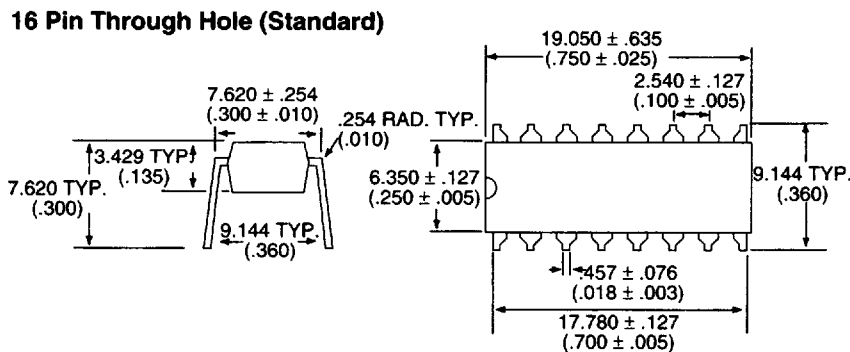

16 Pin PC Board Pattern (Bottom View)

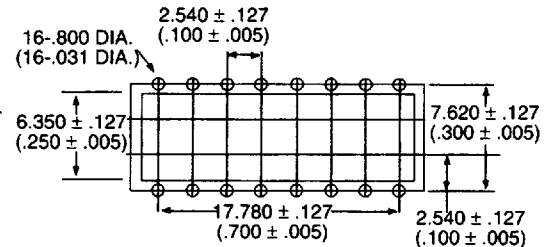


8 Pin SIP

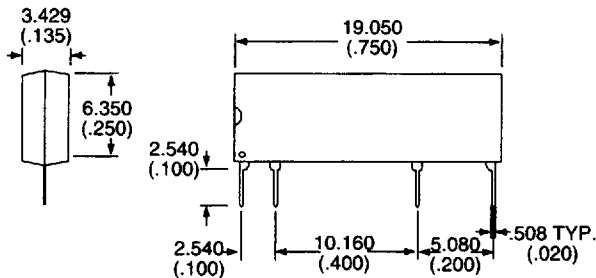


DIMENSIONS
mm
(Inches)


16 Pin DIP

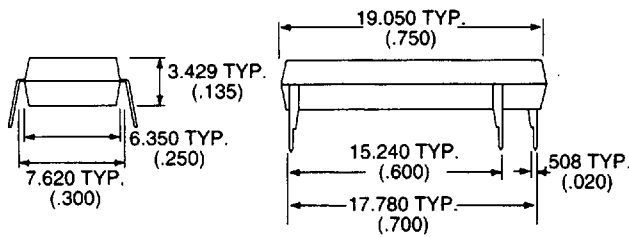


Thermal Clip

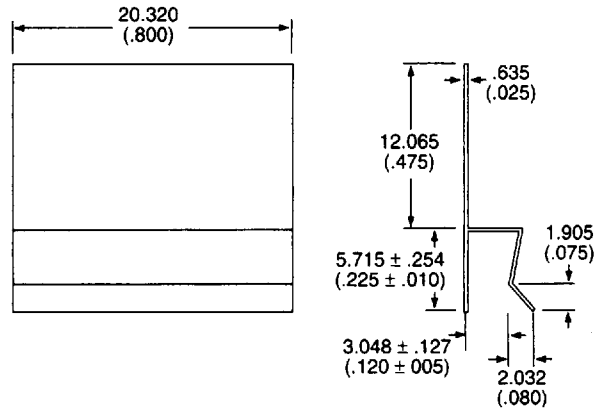


OptoFILM® 10A Series, Pins

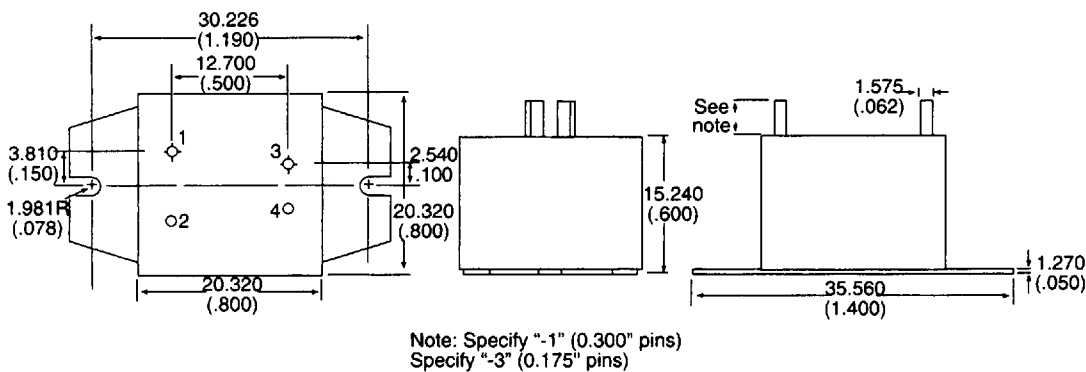


OptoFILM® 10A Series, Quick Connect

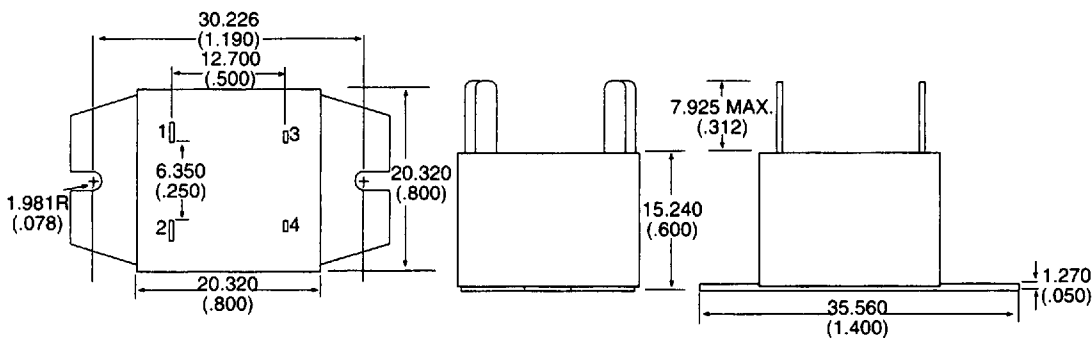


Tape and Reel Packaging for 6 Pin Surface Mount Package

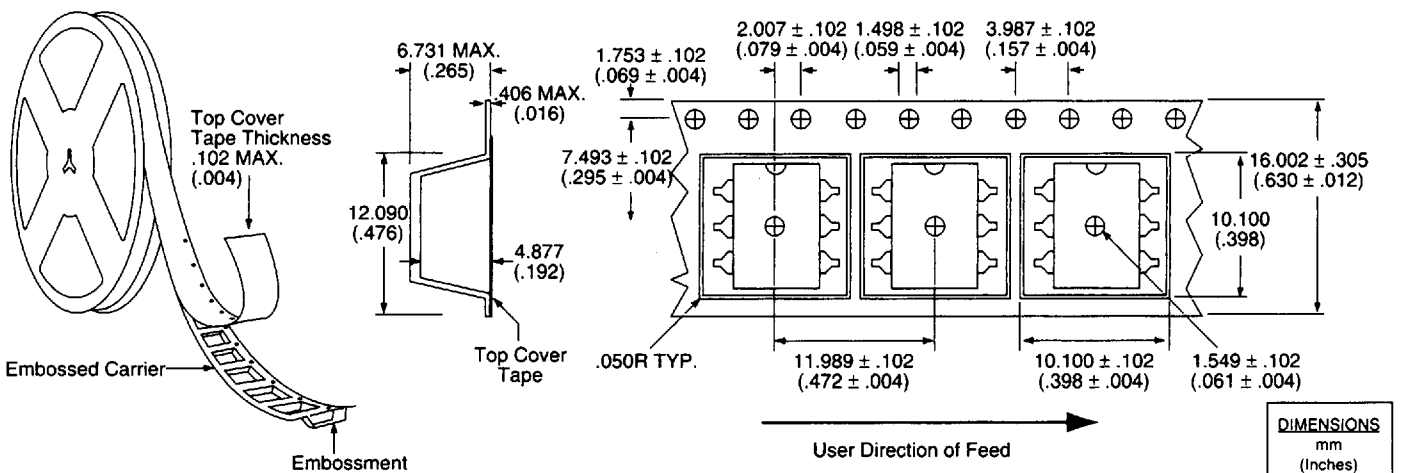

Tape and Reel Packaging for 8 Pin Surface Mount Package

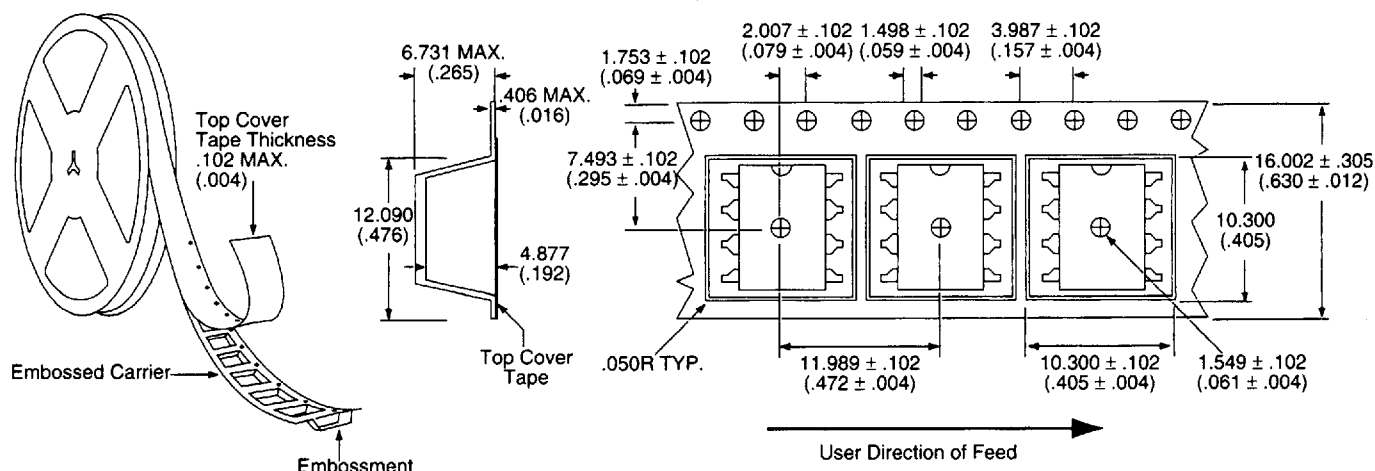

Tape and Reel Packaging for 8 Pin Flatpack Package

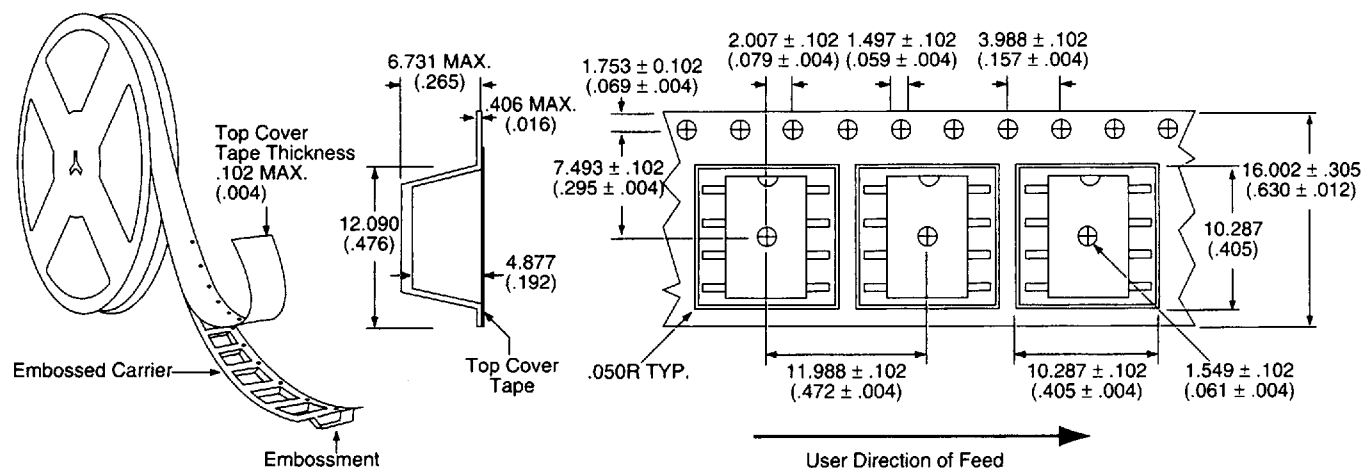

Tape and Reel Packaging for 16 Pin SOIC Package

