

HDSL2 & G.SHDSL Magnetics



TM02305

- Designed to comply with the requirements of UL1950 and EN60950 to provide a supplementary insulation barrier with a working voltage of 250V
- Minimum interwinding breakdown voltage of 1500 Vrms
- Minimum interwinding breakdown voltage of 600 Vrms between pin 9 and 10 for 1 minute
- Operating and storage temperature range: -40° to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ±2%	Inductance ¹ mH ±7%	Leakage Inductance ² µH max	DCR Ω max		Longitudinal Balance ³ dB max	Insertion Loss ³ dB max	Frequency Response ³ dB	Harmonic Distortion ³ dB max
	Chip : Line	Line Side	Line Side	Chip Side	Line Side	20 kHz - 300 kHz	100 kHz	40 kHz - 500 kHz	4 Vac 5 kHz Fundamental
S560-6600-H3	1 : 5.4	3.2	14	0.46	3.0	-55	0.5	±0.3	-78

All measurements are made with pins 2 and 3 connected and pins 6 and 7 connected


1. Inductance measured at 10 kHz, 0.1 Vac

2. Measured at 100 kHz, 0.1 Vac

3. Measured with line impedance of 135 Ω and chip impedance of 4.6 Ω

SCHEMATIC


S560-6600-H3

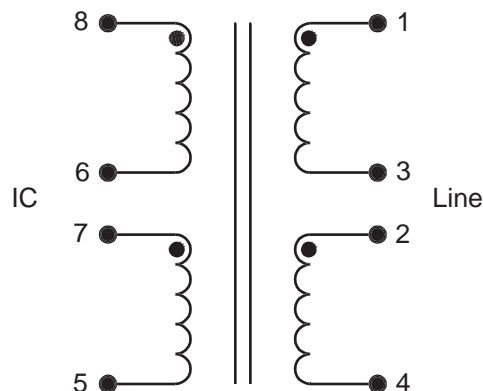


TM02305

MECHANICAL

S560-6600-H3

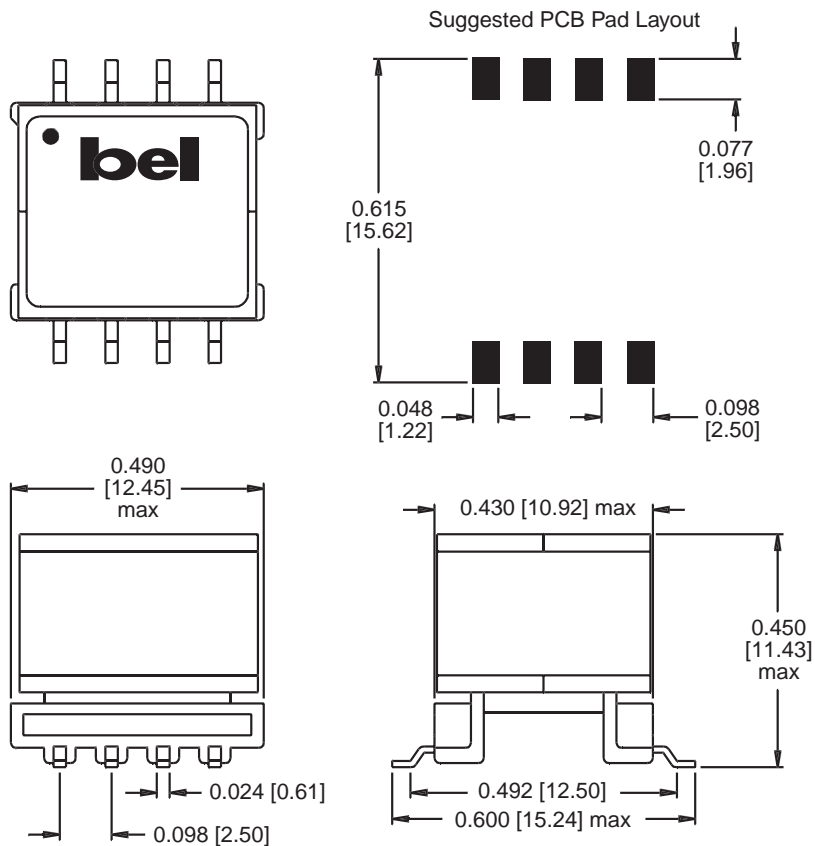

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

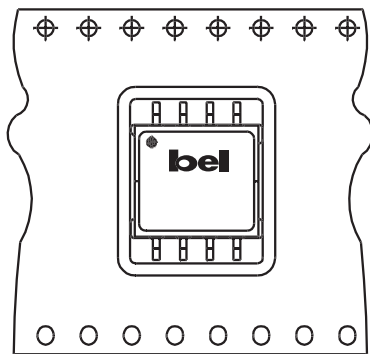

➔ User Feed Direction

Orientation of Component Inside Pocket

Tape and Reel Packaging

32 mm wide by 24 mm pitch; 13 inch OD, 4 inch ID
200 components per reel, maximum
Meets ANSI/EIA 481-2 Carrier Tape Standards

©2002 Bel Fuse Inc. Specifications subject to change without notice. 05.02

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com