



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


SSR4040CT

Designer's Data Sheet

- FEATURES:**
- Extremely Low Forward Voltage Drop
 - Hermetically Sealed Power Surface Mount Package
 - Guard ring for overvoltage protection
 - Eutectic Die Attach
 - 150°C Operating Junction Temperature

 - TX, TXV, and Space Level Screening Available

**40 AMP
40 VOLTS
POSITIVE CENTERTAP
SCHOTTKY RECTIFIER**

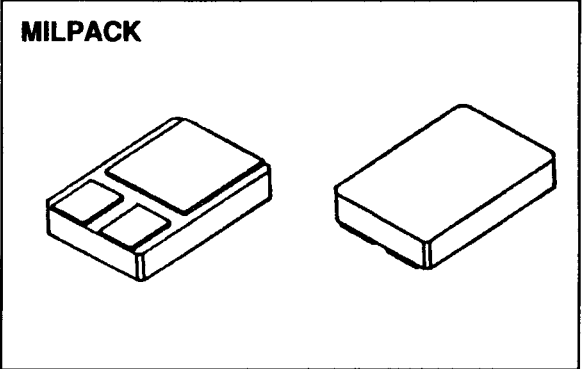

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	40	Volts
	VRWM		
	VR		
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	40	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	600	Amps
Operating and storage temperature	Top & Tstg	-65 to +150	°C
Maximum Thermal Resistance Junction to Case, both legs tied together	RθJC	1.0	°C/W

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0163 B

MED

SSR4040CT

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


ELECTRICAL CHARACTERISTICS (Per Leg)

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA=25°C, 300µs Pulse) (IF = 10 Adc, TA=25°C, 300µs Pulse) (IF = 20 Adc, TA=25°C, 300µs Pulse)	VF1	0.38 0.47 0.62	Vdc
Instantaneous Forward Voltage Drop (IF = 10 Adc, TA= - 55°C, 300µs Pulse)	VF2	0.52	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300µs pulse minimum)	IR1	5	mA
Reverse Leakage Current (Rated VR, TA=100°C, 300µs pulse minimum)	IR2	200	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	800	pf

CASE OUTLINE: MILPACK

PIN OUT:

- PIN 1: CATHODE**
- PIN 2: ANODE 1**
- PIN 3: ANODE 2**

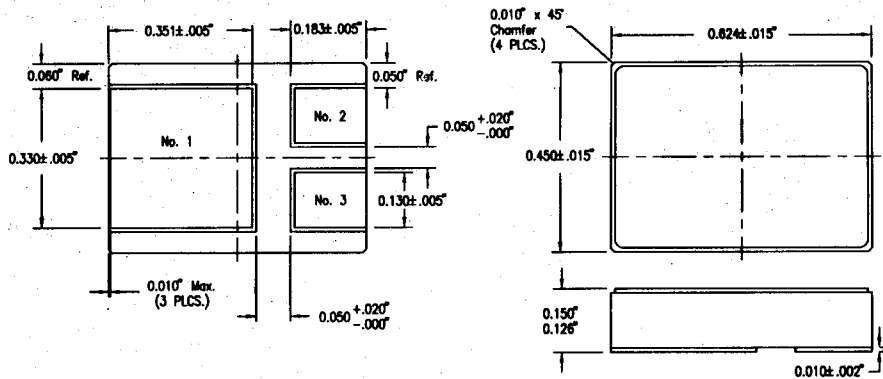

TYPICAL OPERATING CURVES

(TA=25°C Unless otherwise specified)

