

FEATURES


- Planar Structure
- Dielectric Passivation
- 100% Purge Burn-in
- High Responsivity

APPLICATIONS

- Communications
- Test and Measurement
- Sensing
- Optical Power Monitors



PD300-003-0xx
Ceramic Sub-Mount



PD300-003-1xx
TO can Package



PD300-003-3xx
SC/APC Pigtail



PD300-003-5xx
FC Receptacle

PRODUCT DESCRIPTION

The PD300 is an InGaAs photodiode with a photosensitive region 300 μ m in diameter. It is intended for use in moderate speed, low noise communication systems (up to 300Mb/s data rates) as well as applications in test and measurement and other optical power sensing devices. The large active area allows the use of multimode fiber.

Reliability is assured by hermetic sealing and 100% purge burn-in (200 $^{\circ}$ C, 15 hours, $V_r = 15V$). The device can be assembled on a ceramic sub-mount or in a TO can. It can be pigtailed with SC, FC or ST connectors (UPC or APC). It can also be mounted in an SC, ST or FC receptacle. Custom packages are an option.

ELECTRICAL CHARACTERISTICS

Table 1: Electrical Specifications

PARAMETER	MIN	TYP	MAX	UNIT
Dark Current (I_D)	-	0.5	5.0	nA
Capacitance (Ceramic sub-mount) ⁽¹⁾	-	4.0	4.2	pF
Capacitance (Receptacle, Pigtail, TO can) ⁽¹⁾	-	4.2	4.4	pF
Responsivity at 1310nm (Ceramic sub-mount)	0.80	0.90	-	A/W
Responsivity at 1550nm (Ceramic sub-mount)	0.85	0.95	-	A/W
Responsivity at 1310nm (Receptacle, Pigtail, TO can)	0.80	0.85	-	A/W
Responsivity at 1550nm (Receptacle, Pigtail, TO can)	0.85	0.90	-	A/W
3dB bandwidth (50 Ω) (Ceramic sub-mount) ⁽¹⁾	630	660	-	MHz
3dB bandwidth (50 Ω) (Receptacle, Pigtail, TO can) ⁽¹⁾	600	630	-	MHz
Optical Return Loss (Pigtail using SMF-28)	50	55	-	dB
Optical Return Loss (Receptacle, APC connector)	40	45	-	dB
Operating voltage	-	5	15	V


⁽¹⁾ 5V bias voltage

Table 2: Absolute Maximum Ratings

PARAMETER	MIN	MAX	UNIT
Forward Current	-	25	mA
Reverse Current	-	5000	μA
Reverse Voltage	-	20	V
Optical input power	-	5	mW
Operating Case Temperature	-40	+85	°C
Storage Temperature	-40	+85	°C
Soldering temperature (10 seconds)	-	+250	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

PACKAGE DIMENSIONS – PD300-003-100 and PD300-003-105

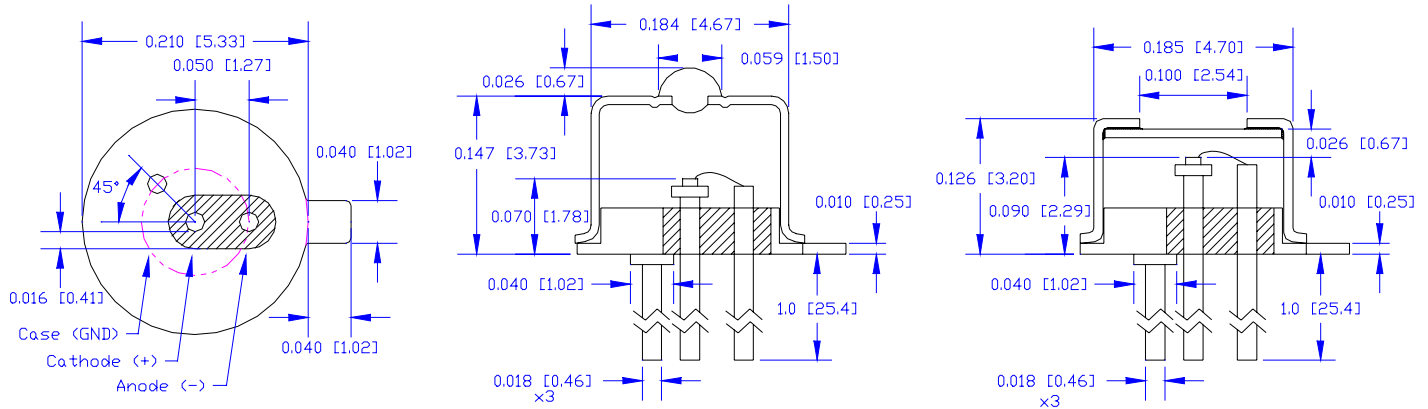

Dimensions: INCHES [mm]

ORDERING INFORMATION

Table 3: Standard

Part Number	Options
PD300-003-100	TO46, 3pin, non AR coated, gold plated lens cap
PD300-003-105	TO46, 3pin, non AR coated, gold plated flat window cap

Table 4: Custom

Part Number	Options
PD300-003-0xx	Custom defined size and electrical layout.
PD300-003-1xx	Package: TO46, TO56, 2 or 3 pin. Cap: Window or lens. AR or Non-AR coated. Gold or nickel plated.
PD300-003-3xx	Pigtailed: TO46, 2 or 3 pin. Fiber length, 0.5 meter, 1.0 meter Fiber type: Multimode, single mode (SMF-28) or custom supplied Connector Type: SC, ST or FC. APC or UPC
PD300-003-5xx	Receptacle, 2 or 3 pin. SC, ST or FC aligned

Please contact Anadigics for the specific part number and pinout that suits your needs

ANADIGICS, Inc.
 829 Flynn Road
 Camarillo, California 93012, U.S.A.
 Tel: +1 (805) 445-4500
 Fax: +1 (805) 445-4502
 URL: <http://www.anadigics.com>
 E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.