


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV	DESCRIPTION	DATE	APPROVED
A	RELEASED PER ECO E990181	GCK 5/19/99	RCM

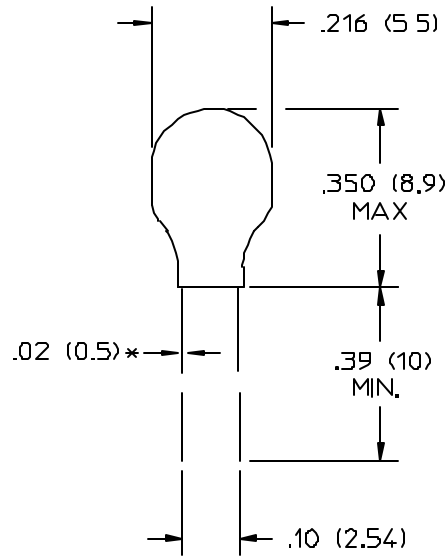




DIMENSIONS - INCHES (MM)  
 \* LEAD TOLERANCE = ±.015\*(±.38MM)

**ELECTRICAL CHARACTERISTICS**

TEMPERATURE RANGE: -55°C - +85°C  
 CAPACITANCE TESTED @ 120 Hz -  
 10µF, 25V, 20% @ 85°C, 16.5V @ 125°C  
 D.C. - . LEAKAGE @ 25°C = 2.0µA  
 MAX. DISSIPATION FACTOR = 6% @ 25°C, 120Hz

**CAPACITOR MARKINGS**

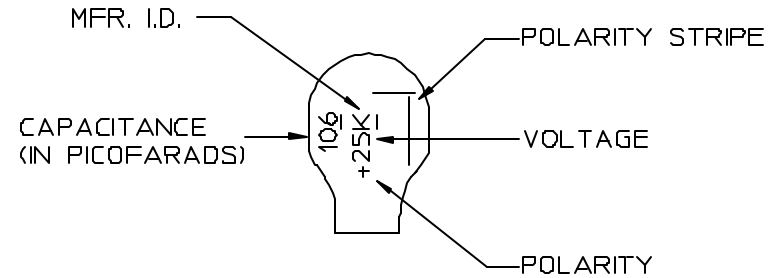

DRAWN BY GCK		DATE 5/19/99		 <b>CAP., SOLID TANTALUM</b> <b>10 µF, 20%, 25V</b>	
<small>UNLESS OTHERWISE SPECIFIED                  DIMENSIONS ARE IN INCHES-                  TOLERANCES ARE                  FRACTIONS DECIMALS ANGLES                  +1/64 .XX- +.01 .1°                  .XXX-.005</small>					
THIRD ANGLE PROJECTION 		SIZE B	FSCM NO. 67131	DWG NO 20641	REV A
DO NOT SCALE DRAWING		SCALE NONE	SHEET 1 OF 1		