

HIGH FREQUENCY MAGNETICS

T1/E1 Through Hole Shielded Transformer

TM00124


- Designed for DS1, DS1C, and CEPT applications
- Electrostatic shield provides improved longitudinal signal suppression
- 2741J has an internal connection to terminal 8; do not use
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ±2%	Primary Inductance ¹ mH min	DCR Ω max		Leakage Inductance ² μH max	Interwinding Capacitance ⁴ pF max	Minimum Interwinding Breakdown Voltage Vrms
	Pri : Sec		Pri	Sec			
2741J	1 CT ³ : 1.37	0.92 ³	0.8 ³	1.25	2.0 ³	8	850
2741K	1 : 1	1.25	0.7	0.85	2.0	3.5	500

1. measured at 10 kHz, 0.1 Vac
2. measured at 100 kHz, 0.1 Vac
3. connect 2 and 6
4. with pin 1 grounded

SCHEMATIC

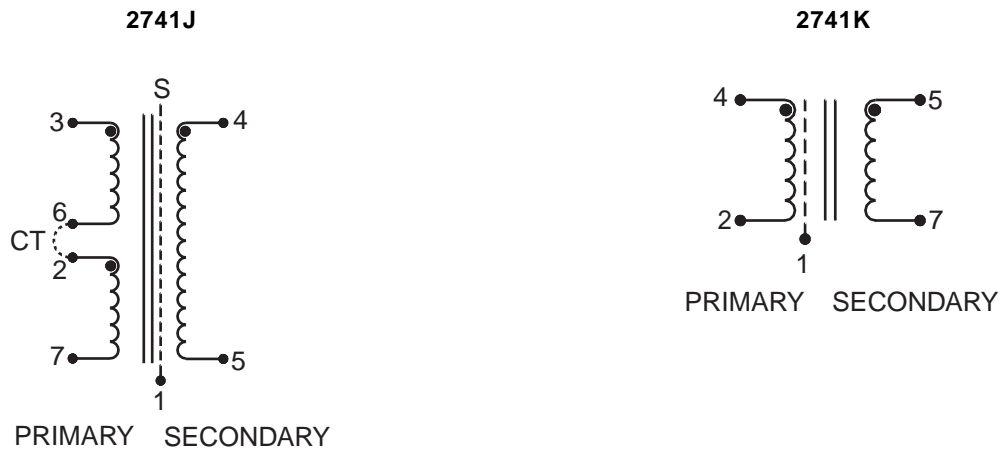


HIGH FREQUENCY MAGNETICS

T1/E1 Through Hole Shielded Transformer

MECHANICAL

2741J
2741K

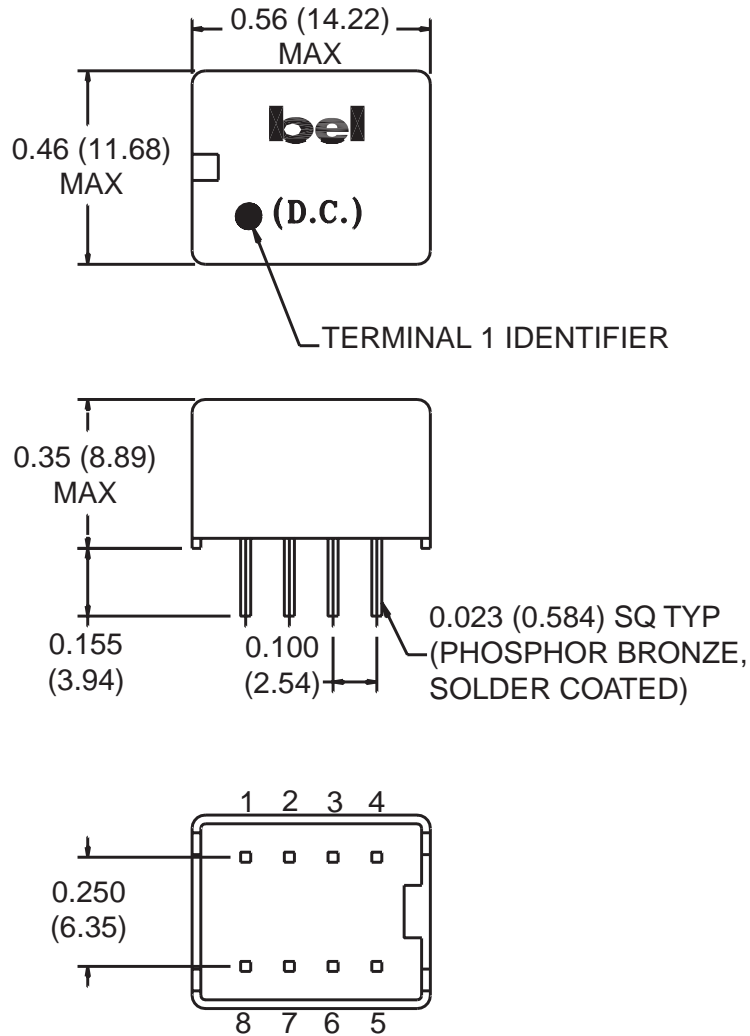

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com