

HIGH FREQUENCY MAGNETICS

T1/E1 Through Hole Shielded Transformers

TM00114

- Operate at the T1 rate of 1.544 Mb/s and the E1 rate of 2.084 Mb/s
- Interwinding Electrostatic Shield provides low capacitance and high EMI suppression
- There is an internal connection to Terminal 8; do not use
- Minimum interwinding breakdown voltage of 2200 Vdc
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias



ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ± 2%	Primary Inductance ¹ mH Min	DCR Ω max		Leakage Inductance ² μH max	Interwinding Capacitance ⁴ pF max	Inductance Unbalance ⁵ of CT windings	
	Pri : Sec		Pri	Sec			Winding	% max
2741S	1 CT : 2 CT	3.15	2.3	5.8	6.8	7.5	Pri & Sec	0.2
2741T	1 CT : 1.375 ³	0.92 ³	1.1 ³	1.7	1.6 ³	8 ³	Pri	0.1

1. measured at 10 kHz, 0.1 Vac
 2. measured at 100 kHz, 0.1 Vac
 3. connect 2 to 6

4. connect 1 to ground
 5. measured at 20 kHz

SCHEMATICS

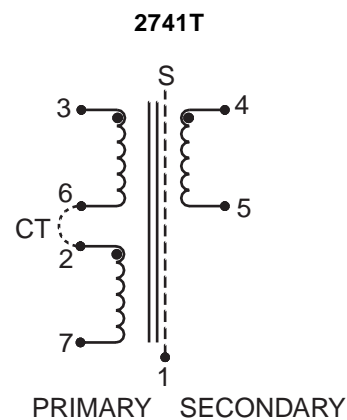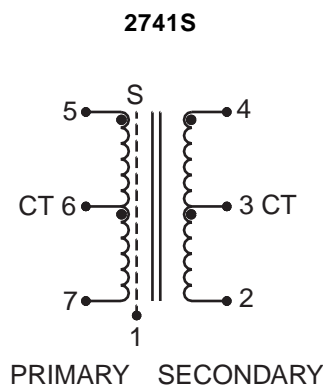


HIGH FREQUENCY MAGNETICS

T1/E1 Through Hole Shielded Transformers

MECHANICAL

2741S
2741T

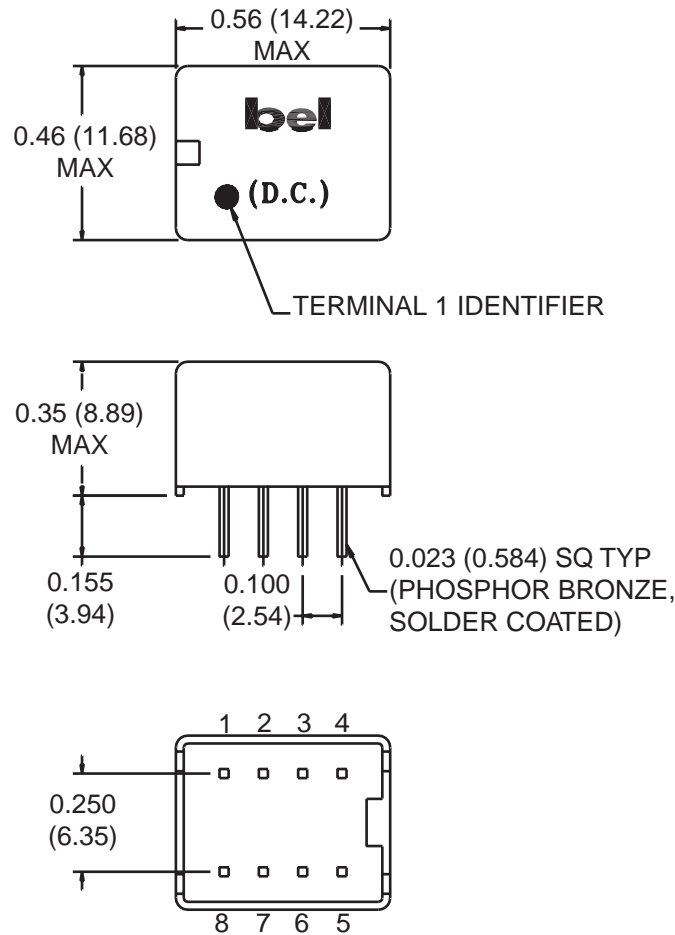

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com