


### Features

- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATION OF DIFFERENT ACROSS CURRENT.
- LONG LIFE.
- LOW CURRENT, POWER SAVINGS.
- LOW MAINTENANCE.
- SOLID STATE, HIGH VIBRATION RESISTANT.
- 6V INTERNAL RESISTOR.

### Description

The Super Bright Yellow source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

### Package Dimensions

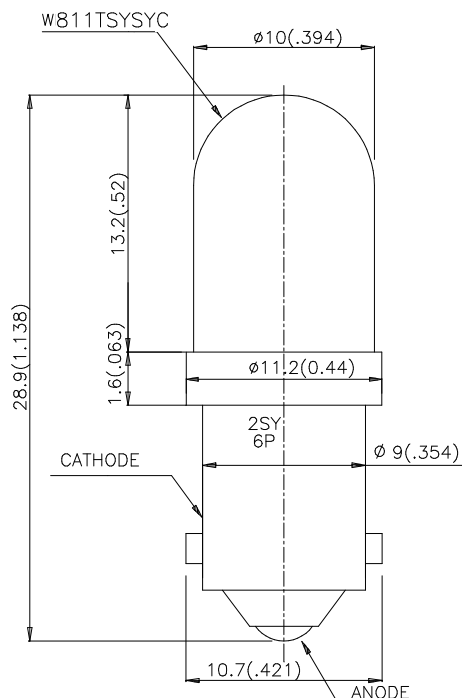

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.

## Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=6V		Viewing Angle
			Min.	Typ.	2θ1/2
BLB102SYC-6V-P	SUPER BRIGHT YELLOW (InGaAlP)	WATER CLEAR	650	1300	40°

Note:


1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ <sub>peak</sub>	Peak Wavelength	Super Bright Yellow	590	-	nm	V <sub>F</sub> =6V
λ <sub>D</sub>	Dominate Wavelength	Super Bright Yellow	588	-	nm	V <sub>F</sub> =6V
Δλ <sub>1/2</sub>	Spectral Line Half-width	Super Bright Yellow	28	-	nm	V <sub>F</sub> =6V
I <sub>F</sub>	Forward Current	Super Bright Yellow	21	-	mA	V <sub>F</sub> =6V
C	Capacitance	Super Bright Yellow	25	-	pF	V <sub>F</sub> =0V; f=1 MHz
I <sub>R</sub>	Reverse Current	Super Bright Yellow	-	10	μA	V <sub>R</sub> = 5V

## Absolute Maximum Ratings at T<sub>A</sub>=25°C

Parameter	Super Bright Yellow	Units
Power Dissipation	150	mW
Forward Voltage	7	V
Reverse Voltage	5	V
Operating Temperature	-40°C To +70°C	
Storage Temperature	-40°C To +85°C	

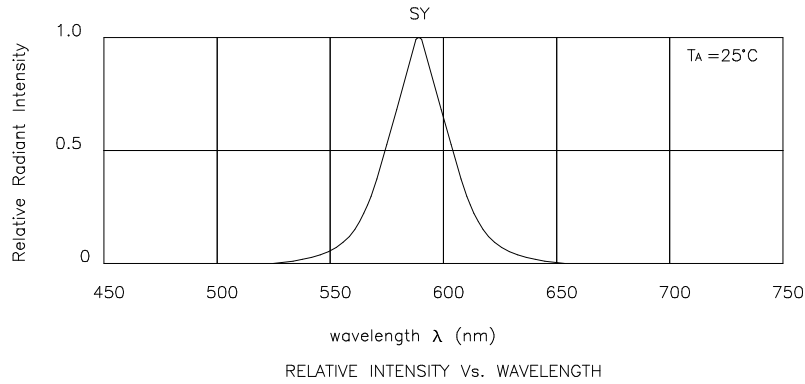

## Super Bright Yellow

## BLB102SYC-6V-P

