




JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

## TO-220 Plastic-Encapsulate Voltage Regulator

## CJ7805 Three-terminal positive voltage regulator

## FEATURES

- Maximum Output current  $I_{OM}$ : 1.5 A
- Output voltage  $V_o$ : 5V
- Continuous total dissipation  $P_D$ : 2 W ( $T_J = 25^\circ C$ )

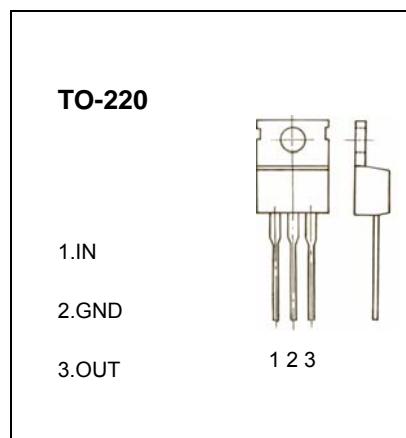

## ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

| Parameter                            | Symbol          | Value   | Unit |
|--------------------------------------|-----------------|---------|------|
| Input Voltage                        | $V_i$           | 35      | V    |
| Thermal resistance junction-air      | $R_{\theta JA}$ | 65      | °C/W |
| Thermal resistance junction-cases    | $R_{\theta JC}$ | 5       | °C/W |
| Operating Junction Temperature Range | $T_{OPR}$       | 0-150   | °C   |
| Storage Temperature Range            | $T_{STG}$       | -65-150 | °C   |

ELECTRICAL CHARACTERISTICS( $V_i=10V, I_o=500mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                | Symbol                | Test conditions                                 | MIN  | TYP  | MAX  | UNIT  |
|--------------------------|-----------------------|---|------|------|------|-------|
| Output voltage           | $V_o$                 | $T_J=25^\circ C$                                | 4.8  | 5.0  | 5.2  | V     |
|                          |                       | $7V \leq V_i \leq 20V, I_o=5mA-1A, P<15W$       | 4.75 | 5.00 | 5.25 | V     |
| Load Regulation          | $\Delta V_o$          | $T_J=25^\circ C, I_o=5mA-1.5A$                  |      | 15   | 100  | mV    |
|                          |                       | $T_J=25^\circ C, I_o=250mA-750mA$               |      | 5    | 50   | mV    |
| Line regulation          | $\Delta V_o$          | $7V \leq V_i \leq 25V, T_J=25^\circ C$          |      | 3    | 100  | mV    |
|                          |                       | $8V \leq V_i \leq 12V, T_J=25^\circ C$          |      | 1    | 50   | mV    |
| Quiescent Current        | $I_q$                 | $T_J=25^\circ C$                                |      | 4.2  | 8    | mA    |
| Quiescent Current Change | $\Delta I_q$          | $7V \leq V_i \leq 25V$                          |      |      | 1.3  | mA    |
|                          |                       | $5mA \leq I_o \leq 1A$                          |      |      | 0.5  | mA    |
| Output Noise Voltage     | $V_N$                 | $10Hz \leq f \leq 100KHz$                       |      | 40   |      | uV    |
| Output voltage drift     | $\Delta V_o/\Delta T$ | $I_o=5mA$                                       |      | -1.1 |      | mV/°C |
| Ripple Rejection         | $RR$                  | $8V \leq V_i \leq 18V, f=120Hz, T_J=25^\circ C$ | 62   | 78   |      | dB    |
| Dropout Voltage          | $V_d$                 | $T_J=25^\circ C, I_o=1A$                        |      | 2    |      | V     |
| Output resistance        | $R_o$                 | $f=1KHz$  |      | 10   |      | mΩ    |
| Short Circuit Current    | $I_{sc}$              | $V_i=35V, T_J=25^\circ C$                       |      | 750  |      | mA    |
| Peak Current             | $I_{pk}$              | $T_J=25^\circ C$                                |      | 2.2  |      | A     |

## TYPICAL APPLICATION

