

The CL - 1KL7 is a high - power GaAlAs IRED mounted in a durable, hermetically sealed TO - 18 metal can package. The output power is high compared to GaAs IREDS.

FEATURES


- TO - 18 can type with glass lens
- Peak emission wavelength $\lambda = 880\text{nm}$
- Narrow beam angle $\pm 8\text{deg.}$
- High output power
- High reliability

APPLICATIONS

- Optical switches

DIMENSIONS

(Unit : mm)

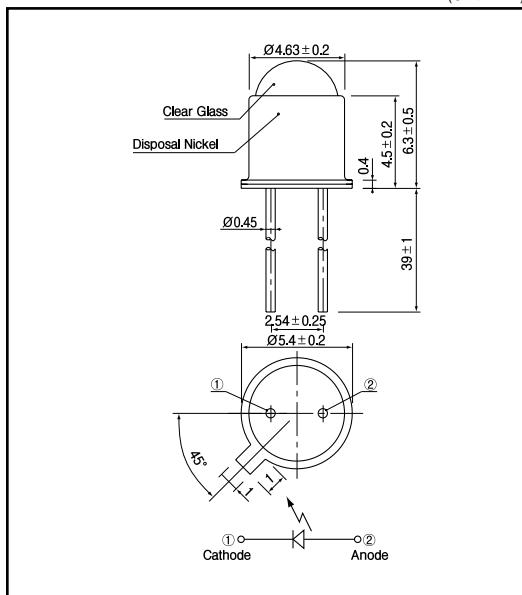

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Reverse voltage	V _R	5	V
Forward current	I _F	100	mA
Power dissipation	P _D	200	mW
Pulse forward current ^①	I _{FP}	1	A
Operating temp.	T _{opr.}	-30 +100	
Storage temp.	T _{stg.}	-55 +150	
Soldering temp. ^②	T _{sol.}	260	

^①1. pulse width : tw = 100 μsec, period : T = 10msec.

^②2. For MAX.5 seconds at the position of 2 mm from the package

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Forward voltage	V _F	I _F =100mA		1.6	2.0	V
Reverse current	I _R	V _R =5V			10	μA
Peak emission wavelength	λ	I _F =50mA		880		nm
Spectral bandwidth		I _F =50mA		50		nm
Radiant intensity	P _O	I _F =100mA		6.5		mW
Half angle				±8		deg.


Infrared Emitting Diodes(GaAlAs)

CL - 1KL7


**Power dissipation Vs.
Ambient temperature**

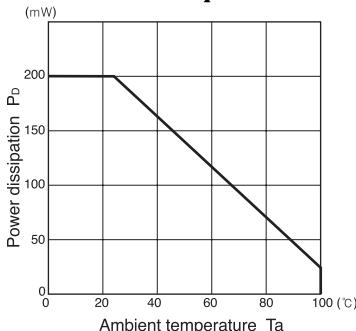


**Radiant intensity Vs.
Forward current**

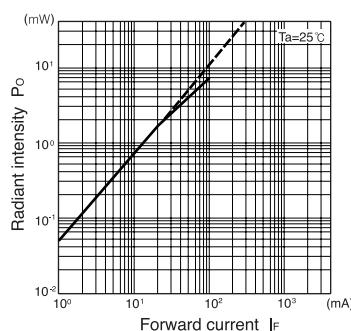


**Relative radiant intensity Vs.
Ambient temperature**

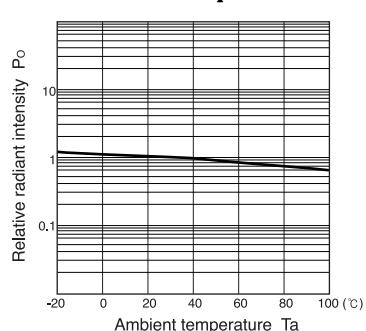


**Relative intensity Vs.
Wavelength**

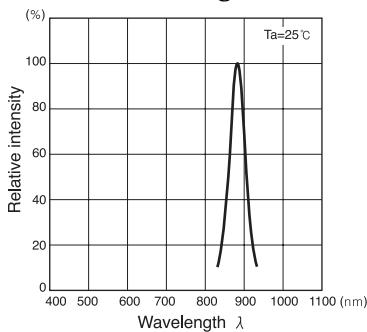


**Forward current Vs.
Forward voltage**

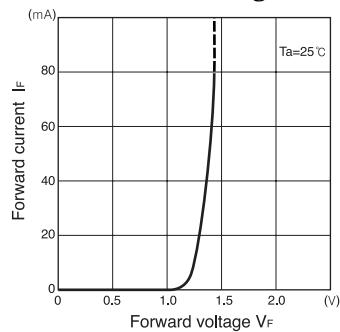

Radiant Pattern

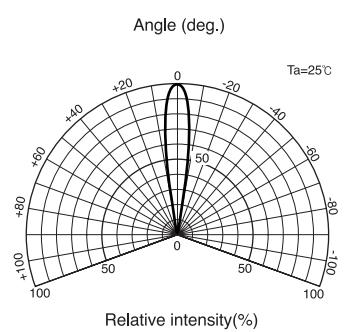

**Relative radiant intensity Vs.
Distance**

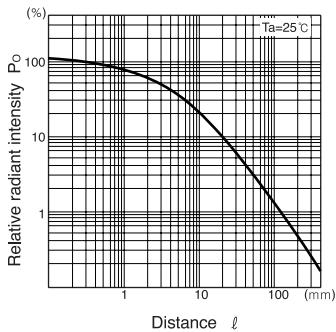

Relative radiant intensity Vs.
Distance test method

