

# SHINDENGEN

## Shottky Rectifiers (SBD)

Dual


**DF30JC6**

**60V 30A**

### OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

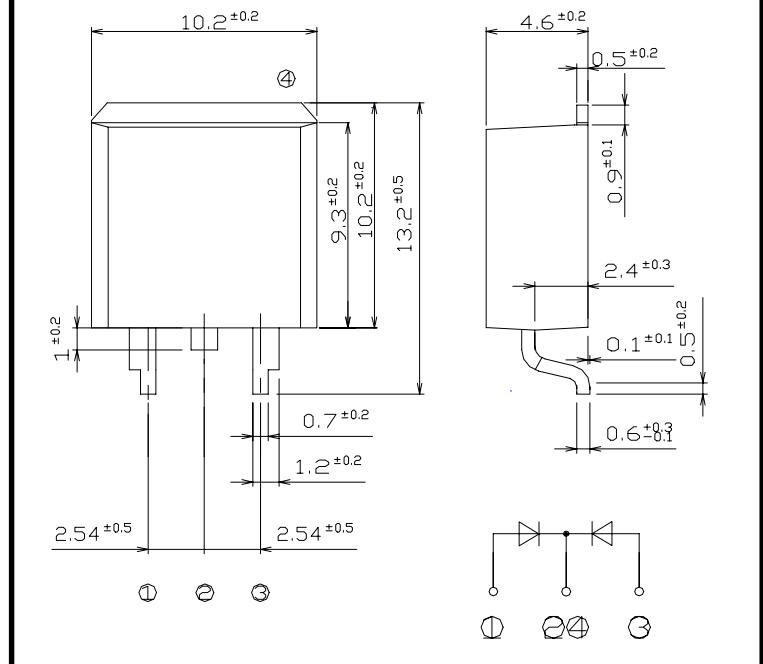

## RATINGS


### ● Absolute Maximum Ratings (Unless otherwise specified, Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V <sub>RM</sub>		60	V
Repetitive Peak Surge Reverse Voltage	V <sub>RRSM</sub>	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I <sub>o</sub>	50Hz sine wave, R-load, Rating for each diode I <sub>o</sub> /2, Tc=108°C	30	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	250	A


### ● Electrical Characteristics (Unless otherwise specified, Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =15A, Pulse measurement, Rating of per diode	Max 0.69	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max 0.7	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ 490	pF
Thermal Resistance	θ <sub>jc</sub>	junction to case	Max 1.6	°C/W

# DF30JC6 Forward Voltage

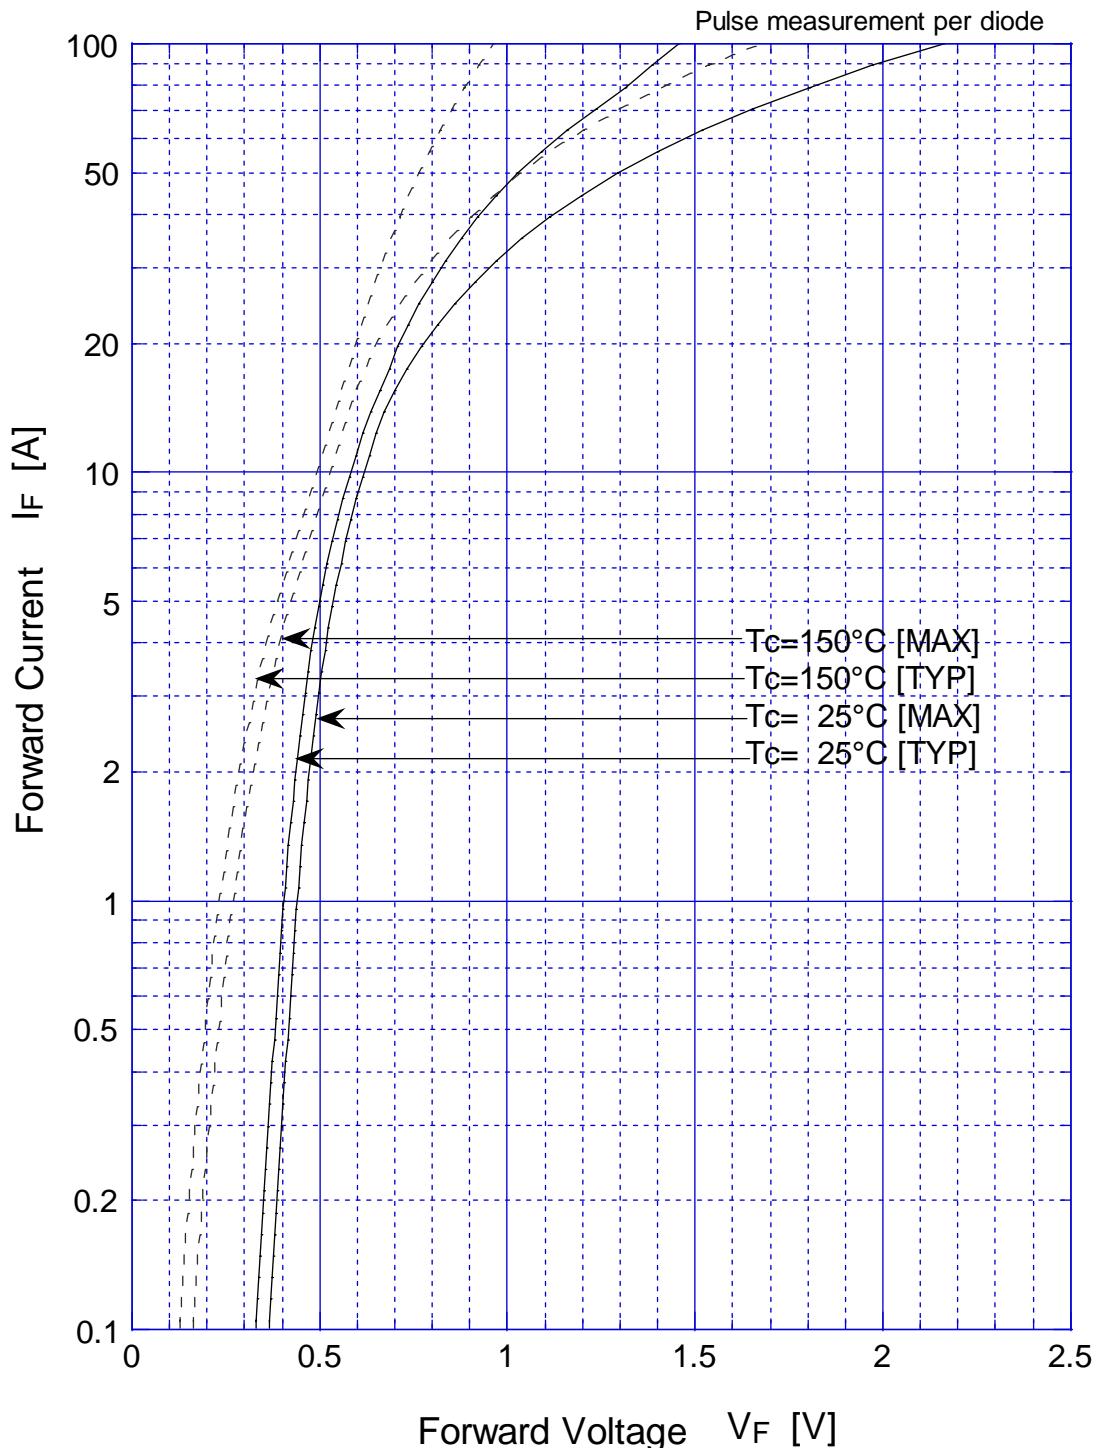


## DF30JC6 Reverse Current

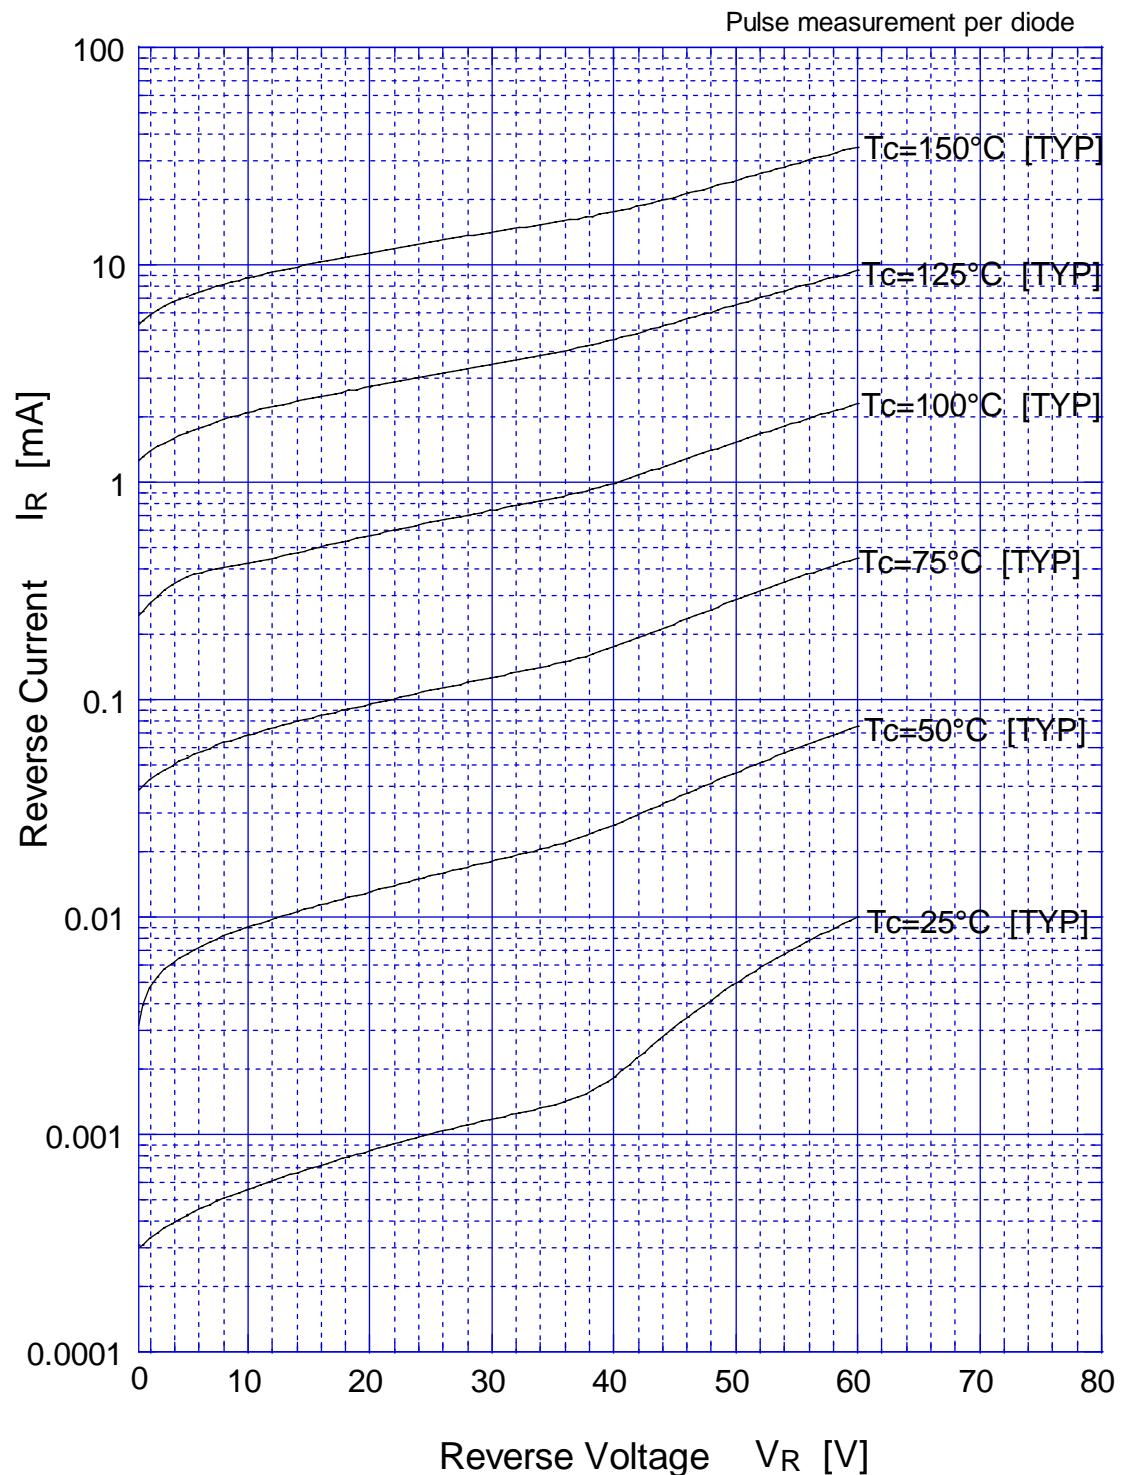


**DF30JC6**

**Forward Power Dissipation**

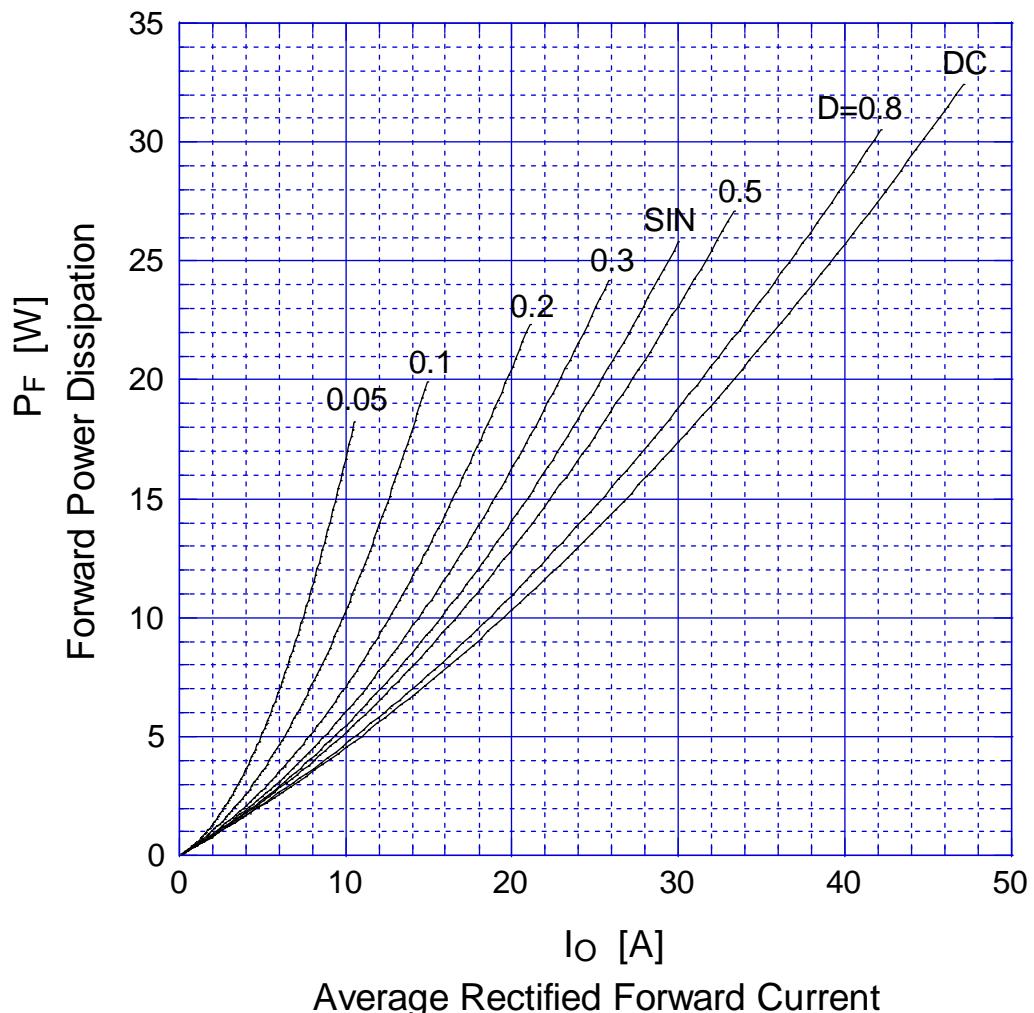


$T_j = 150^\circ\text{C}$

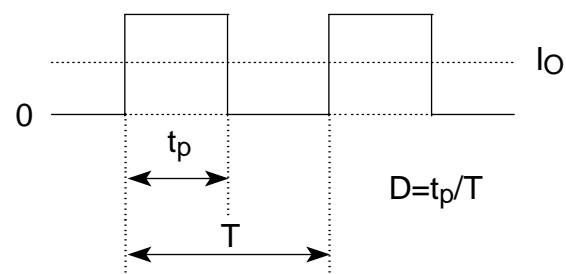


# DF30JC6

## Reverse Power Dissipation


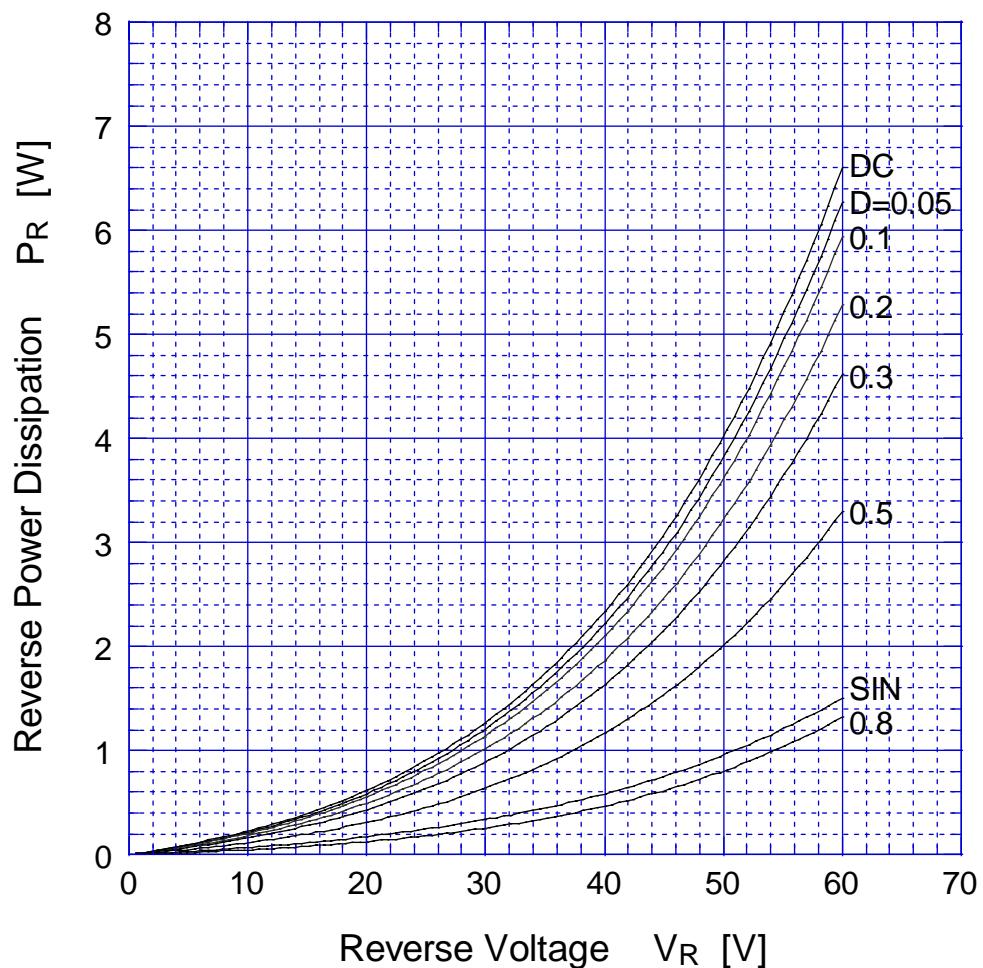


$T_J = 150^\circ\text{C}$

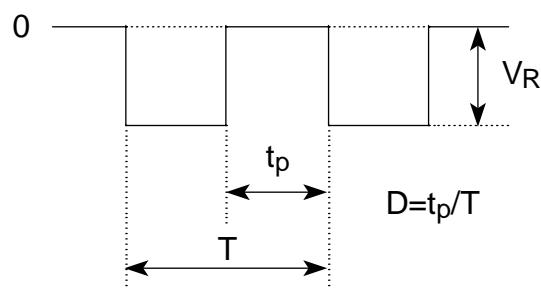


# DF30JC6

## Derating Curve

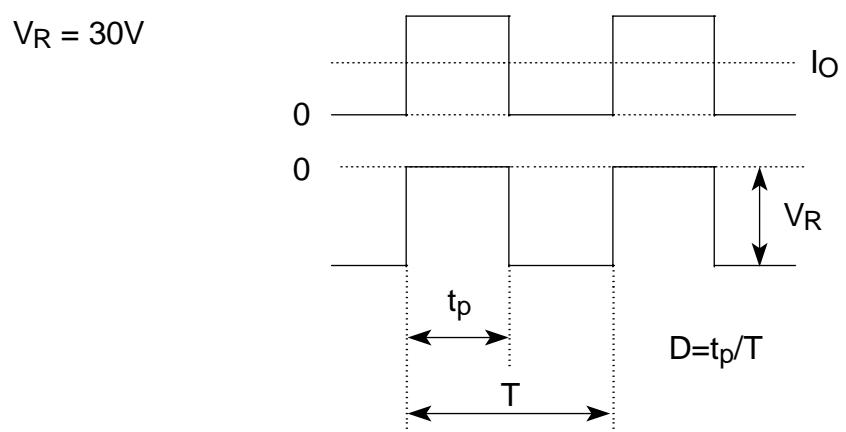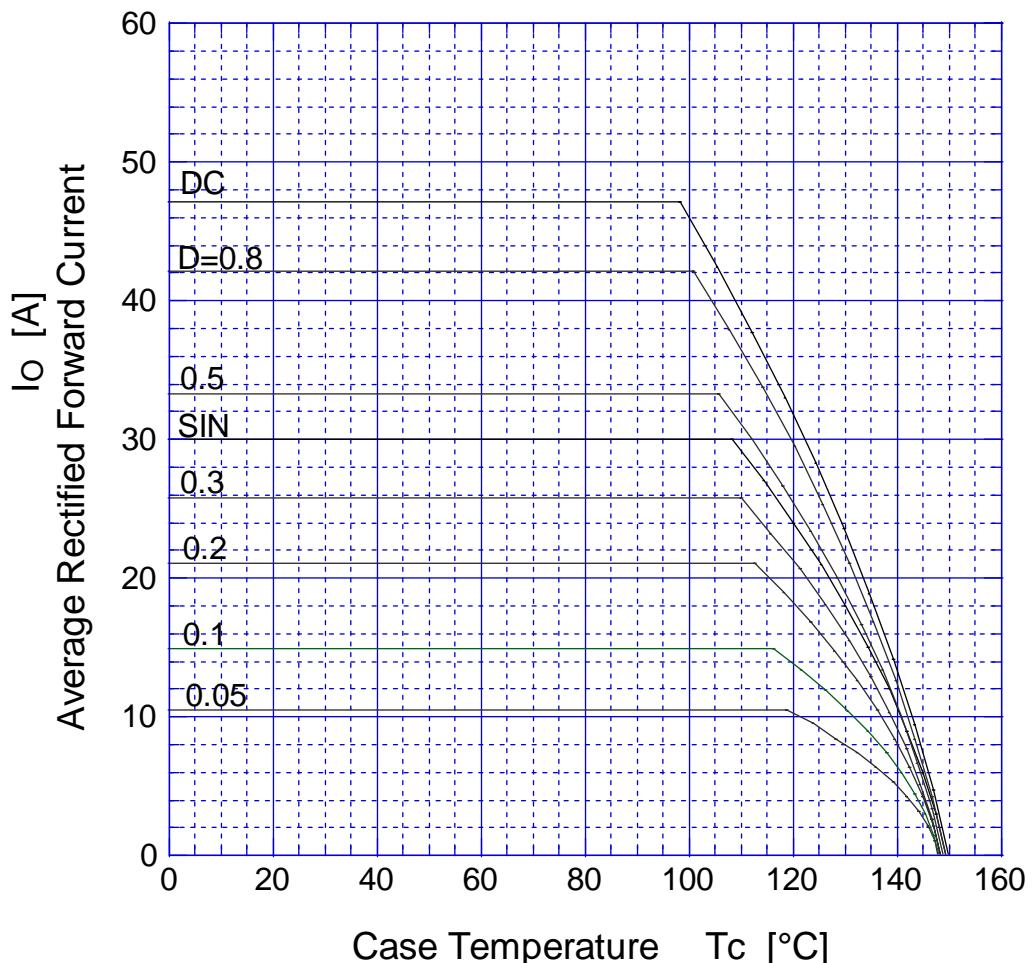

## DF30JC6 Peak Surge Forward Capability

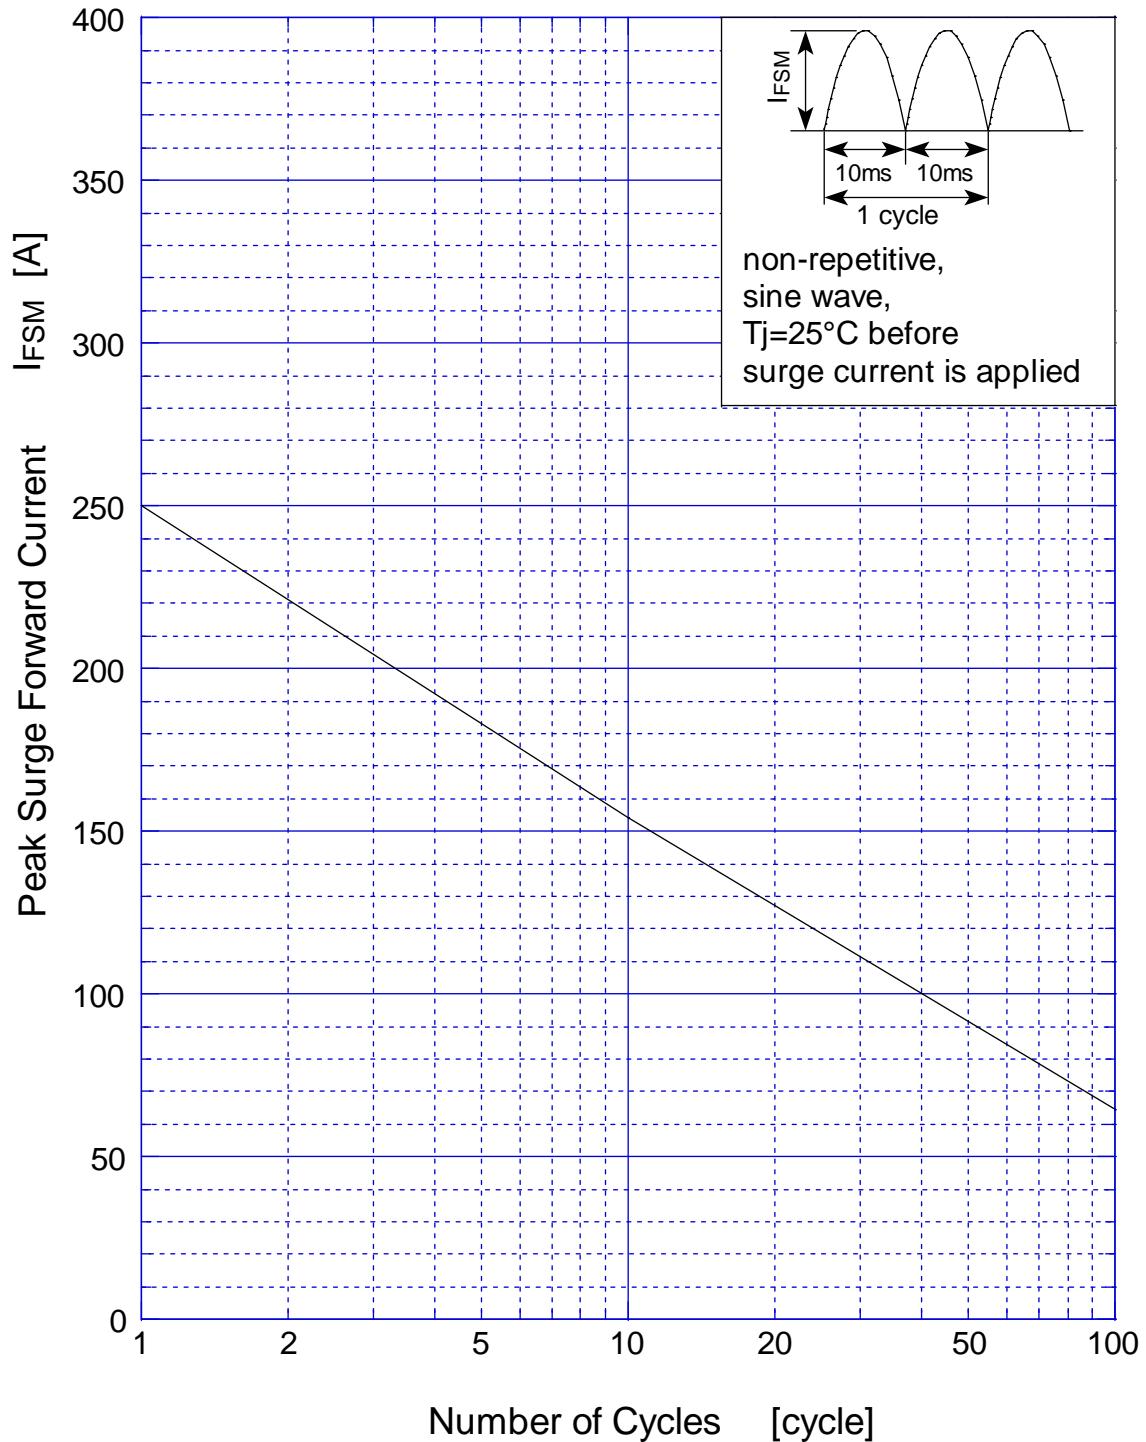

## DF30JC6 Junction Capacitance

